



### INTRODUCE:

HVGT high voltage silicon rectifier diodes is made of high quality glass passivated chip and high reliability epoxy resin sealing structure, and through professional testing equipment inspection qualified after to customers.

### FEATURES:

1. High reliability design.
2. High voltage design.
3. High frequency .
4. Conform to RoHS.
5. Epoxy resin molded in vacuumHave anticorrosion in the surface.

### APPLICATIONS:

1. High voltage multiplier circuit
2. Electrostatic generator circuit .
3. General purpose high voltage rectifier.
4. Other.

### MECHANICAL DATA:

1. Case: epoxy resin molding.
2. Terminal: welding axis.
3. Net weight: 0.28 grams (approx).

### SHAPE DISPLAY:




SIZE: (Unit:mm)

HVGT NAME: DO-308

### DO-308 Series

Lead Diameter 0.6±0.03

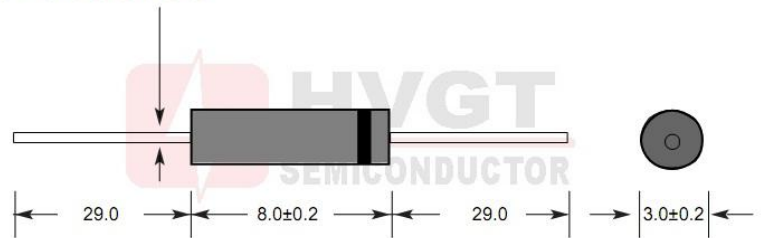

Unit:mm

### MAXIMUM RATINGS AND CHARACTERISTICS: (Absolute Maximum Ratings)

Items	Symbols	Condition	Data Value	Units
Repetitive Peak Reverse Voltage	$V_{RRM}$	$T_A=25^{\circ}C$	4.0	kV
Average Forward Current Maximum	$I_{FAVM}$	$T_A=25^{\circ}C$	200	mA
		$T_{OIL}=-^{\circ}C$	--	mA
Suege Current	$I_{FSM}$	$T_A=25^{\circ}C$ ; Half-Sine Wave; 8.3mS	10	A
Junction Temperature	$T_J$		-40~+125	$^{\circ}C$
Allowable Operation Case Temperature	$T_c$		125	$^{\circ}C$
Storage Temperature	$T_{STG}$		-40~+125	$^{\circ}C$


### ELECTRICAL CHARACTERISTICS: $T_A=25^{\circ}C$ (Unless Otherwise Specified)

Items	Symbols	Condition	Data value	Units
Maximum Forward Voltage Drop	$V_F$	at $25^{\circ}C$ ; at $I_{F(AV)}$	13	V
Maximum Reverse Current	$I_{r1}$	at $25^{\circ}C$ ; at $V_{RRM}$	2.0	$\mu A$
	$I_{r2}$	at $100^{\circ}C$ ; at $V_{RRM}$	20	$\mu A$
Maximum Reverse Recovery Time	$T_{RR}$	at $25^{\circ}C$ ; $I_F=0.5I_{r1}$ ; $I_R=I_{FAVM}$ ; $I_{RR}=0.25I_{r1}$	100	nS
Junction Capacitance	$C_J$	at $25^{\circ}C$ ; $V_R=0V$ ; $f=1MHz$	15	pF




**Fig 1**

**Forward Current Derating Curve**

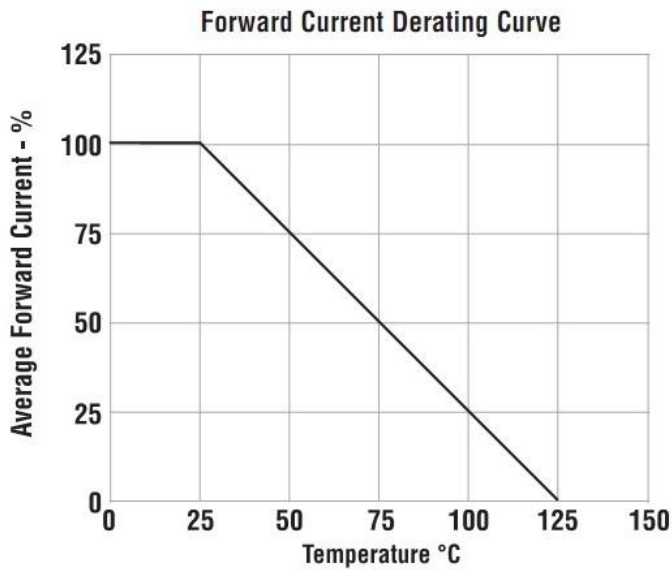

**Fig 2**


**Reverse Recovery Measurement Waveform**

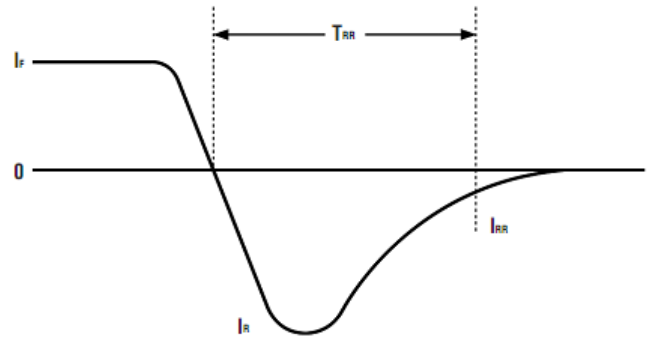

Typical data capture points:  $I_F = 0.5I_R$ ,  $I_R, I_{RR} = 0.25I_R$

**Fig 3**

**Non-Repetitive Surge Current**

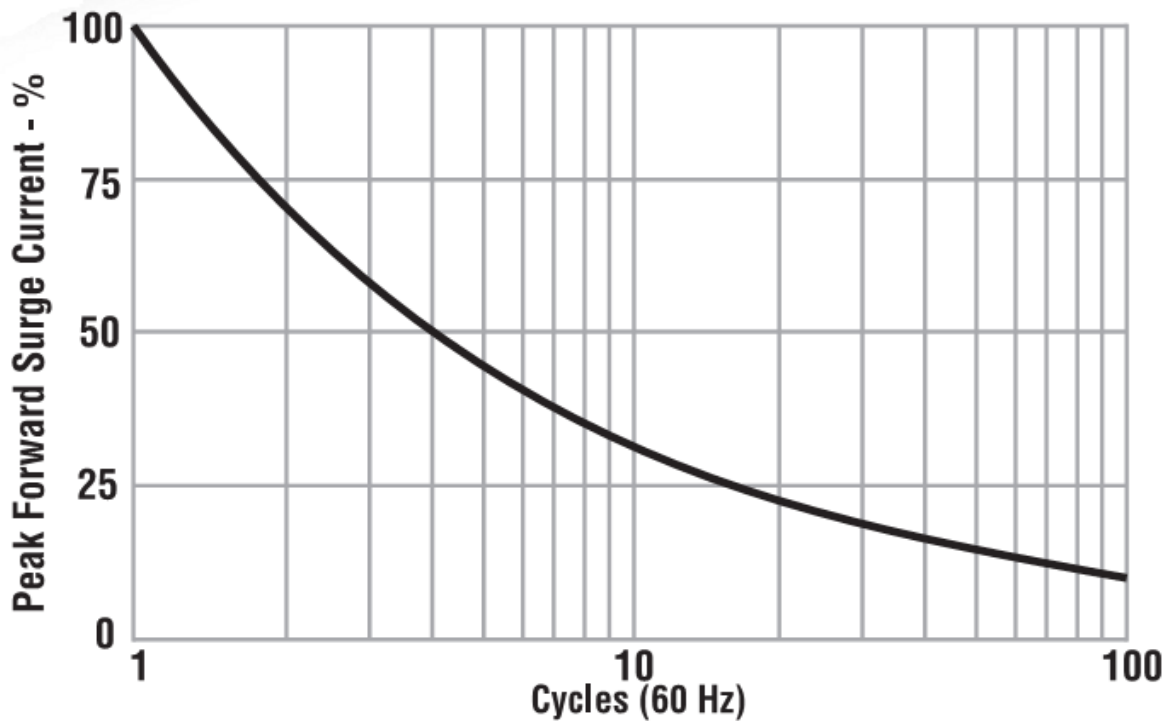

Marking	Type	Code	Cathode Mark
	2CL2FD	--	