




HDB 15 Male  
Plastic: Blue



P1

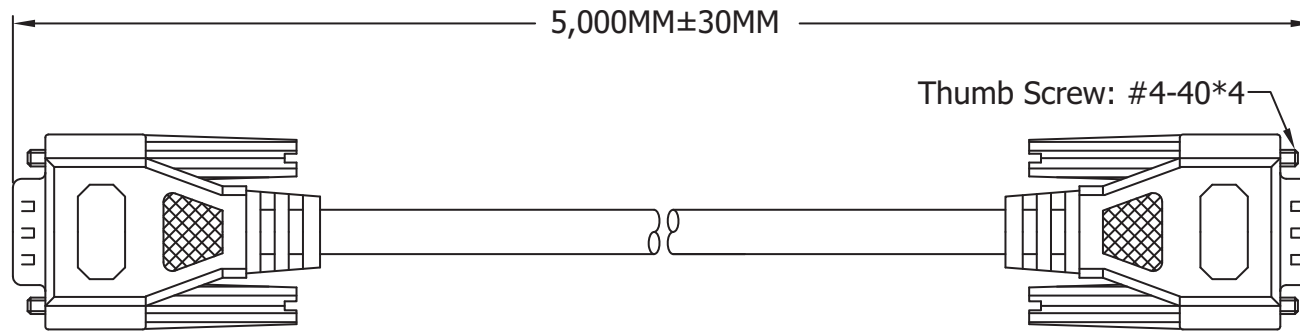

HDB 15 Male  
Plastic: Blue




P2

**Material:**

- 1.CABLE:28AWG(7/0.127 T.C)\*3COAX(75 OHMS)+INSULATION:FO-PE INNER  
JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)\*7C+  
INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN  
WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC  
COLOR:BEIGE, OD:Ø8.5± 0.15mm UL-2919
- 2.CONNECTOR:  
P1&P2:HDB 15P MALE,THE 9TH PIN IS EMPTY GOLD FLASH CONTACT,  
NICKEL PLATED SHELL
- 3.SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- 4.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- 5.ELECTRONIC TEST:  
<1>.100% OPEN SHORT & MIS WIRE TEST  
<2>.CONTACT RESISTANCE 3OHMS MAX  
<3>.INSULATION RESISTANCE 20MOHMS MIN
- 6.PACKING:SEE P-0039 REV.C PACKING DRAWING  
(HANKING SIZE MUST BE SMALLER THAN PACKING)  
PACKING TYPE: DB VP4.

**PIN OUT**

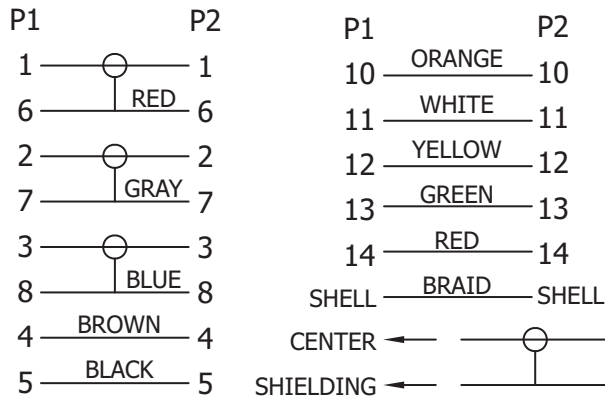

Ⓜ = Assmann logo



ITEM NO.

**AK3770X-5-R**

TITLE

Premium XGA Monitor Connection cable -  
HD D-Sub 15-pin Male <=> Male, 5 Meters

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
©Copyright 2010 by Assmann Electronic Components  
All International Rights Reserved