Fuse DTI 250V



See below: Approvals and Compliances

Description

- Operation full range cable defensive fuses

- Over-load and short-circuit protection

- Colored characteristic detector in the middle

- Characteristic gG
- According to SEV 1010

Technical Data

Rated Current In	2- 16A	Basic Design		
Rated Voltage	250 VAC	Insulator	Ceramic	
Breaking Capacity	10kA	Metal components	Brass	
Rated Power Operating Fre-	50 Hz			
quency fe				

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

Compliances


The product complies with following Guide Lines

Identification	Details	Initiator	Description
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

DTI 250V

Time-Current-Curves

DT I

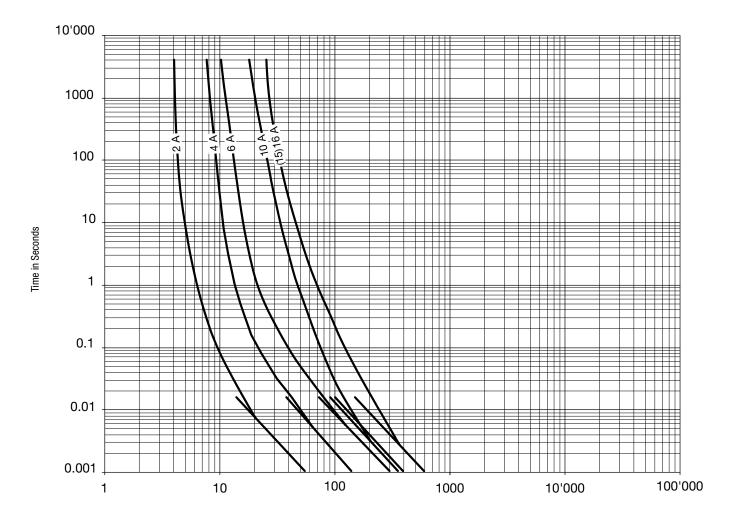

Current in Amperes

All Variants

Rated current	Color	Packaging unit	Order Number	E-No	
2	rose	25	0001.2001	800150209	
4	brown	25	0001.2002	800150409	
16	grey	25	0001.2005	800151509	
6	green	25	0001.2011	800150609	
10	red	25	0001.2012	800151009	

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.