



Illustration may differ



Ordering information

| Type | Part no. |
|-------------------|----------|
| WL4SLGC-3P2252A70 | 1080953 |

Other models and accessories → www.sick.com/W4SLG-3

Detailed technical data

Features

| | |
|--|--|
| Sensor/ detection principle | Photoelectric retro-reflective sensor, autocollimation |
| Dimensions (W x H x D) | 12.2 mm x 41.8 mm x 17.3 mm |
| Housing design (light emission) | Rectangular |
| Mounting hole | M3 |
| Sensing range max. | 0 m ... 3.5 m ¹⁾ |
| Sensing range | 0 m ... 2.2 m ¹⁾ |
| Type of light | Visible red light |
| Light source | Laser ²⁾ |
| Light spot size (distance) | Ø 0.4 mm (60 mm) |
| Wave length | 650 nm |
| Laser class | 1 (EN 60825-1:2014, IEC 60825-1:2014 / CDRH 21 CFR 1040.10 & 1040.11) |
| Adjustment | IO-Link Single teach-in button |
| Pin 2 configuration | External input, Teach-in input, Sender off input, Detection output, logic output, alarm output quality of run |
| Diagnosis | Quality of run, Quality of teach-in |
| AutoAdapt | ✓ |

¹⁾ Reflective tape REF-AC1000.

²⁾ Average service life: 50,000 h at T_U = +25 °C.

Smart Task

| | |
|--|--|
| Smart Task name | Time measurement + debouncing |
| Logic function | Direct WINDOW |
| Timer function | Deactivated On delay Off delay ON and OFF delay Impulse (one shot) |
| Inverter | Yes |
| Time measurement accuracy | SIO Direct: --- ¹⁾ SIO Logic: - 0,7 ... + 0,7 ms ± 0,5 % of time measurement value ²⁾ IOL: - 0.9 ... + 0.9 ms ± 0.5% of the time measurement ³⁾ |
| Time measurement accuracy (e.g. accuracy for time measurement value = 1 s) | SIO Direct: --- ¹⁾ SIO Logic: - 5,7 ... + 5,7 ms ²⁾ IOL: - 5,9 ... + 5,9 ms ³⁾ |
| Resolution time measuring value | 1 ms |
| Min. Time between two process events (switches) | SIO Direct: --- SIO Logic: 450 µs IOL: 500 µs |
| Debounce time max. | SIO Direct: --- SIO Logic: 30.000 ms IOL: 30.000 ms |
| Switching signal Q_{L1} | Output type (dependant on the adjusted threshold) |
| Switching signal Q_{L2} | Output type (dependant on the adjusted threshold) |
| Measuring value | Time measurement value |

¹⁾ SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated").

²⁾ SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.

³⁾ IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

Communication interface

| | |
|---------------------------------------|--|
| Communication interface | IO-Link V1.1 |
| Communication Interface detail | COM2 (38,4 kBaud) |
| Cycle time | 2.3 ms |
| Process data length | 16 Bit |
| Process data structure | Bit 0 = switching signal Q _{L1} Bit 1 = switching signal Q _{L2} Bit 2 ... 15 = measuring value |

Mechanics/electronics

| | |
|---|---|
| Supply voltage | 10 V DC ... 30 V DC ¹⁾ |
| Ripple | < 5 V _{pp} ²⁾ |
| Power consumption | ≤ 30 mA ³⁾ |
| Switching output | PNP ⁴⁾ |
| Output function | Complementary |
| Switching mode | Light/dark switching ⁴⁾ |
| Output current I_{max.} | ≤ 100 mA |
| Response time | ≤ 0.5 ms ⁵⁾ |
| Response time Q/ on Pin 2 | 300 μs ... 450 μs ^{5) 6)} |
| Switching frequency | 1,000 Hz ⁷⁾ |
| Switching frequency Q / to pin 2 | 1,000 Hz ⁸⁾ |
| Connection type | Connector M8, 4-pin |
| Circuit protection | A ⁹⁾ B ¹⁰⁾ C ¹¹⁾ |
| Protection class | III |
| Weight | 100 g |
| Polarisation filter | ✓ |
| Housing material | Plastic, Novodur |
| Optics material | Plastic, PMMA |
| Enclosure rating | IP66 IP67 |
| Special feature | Detecting transparent objects |
| Ambient operating temperature | -10 °C ... +50 °C |
| Ambient operating temperature extended | -30 °C ... +55 °C ^{12) 13)} |
| Ambient storage temperature | -30 °C ... +70 °C |
| UL File No. | NRKH.E181493 |
| Repeatability Q/ on Pin 2: | 150 μs ⁶⁾ |

¹⁾ Limit values when operated in short-circuit protected network: max. 8 A.

²⁾ May not exceed or fall below U_v tolerances.

³⁾ Without load.

⁴⁾ Q = light switching.

⁵⁾ Signal transit time with resistive load.

⁶⁾ Valid for Q \ on Pin2, if configured with software.

⁷⁾ With light/dark ratio 1:1.

⁸⁾ With light / dark ratio 1:1, valid for Q \ on Pin2, if configured with software.

⁹⁾ A = V_S connections reverse-polarity protected.

¹⁰⁾ B = inputs and output reverse-polarity protected.

¹¹⁾ C = interference suppression.

¹²⁾ As of T_a = 50 °C, a max. supply voltage V_{max.} = 24 V and a max. load current I_{max.} = 50 mA is permitted.


¹³⁾ Operation below T_u -10 °C is possible if the sensor is already switched on at T_u > -10 °C, then cools down, and the supply voltage is subsequently not switched off. Switching on below T_u -10 °C is not permissible.

Classifications


| | |
|-----------------------|----------|
| ECI@ss 5.0 | 27270902 |
| ECI@ss 5.1.4 | 27270902 |
| ECI@ss 6.0 | 27270902 |
| ECI@ss 6.2 | 27270902 |
| ECI@ss 7.0 | 27270902 |
| ECI@ss 8.0 | 27270902 |
| ECI@ss 8.1 | 27270902 |
| ECI@ss 9.0 | 27270902 |
| ETIM 5.0 | EC002717 |
| ETIM 6.0 | EC002717 |
| UNSPSC 16.0901 | 39121528 |

Connection diagram


Cd-363



Characteristic curve

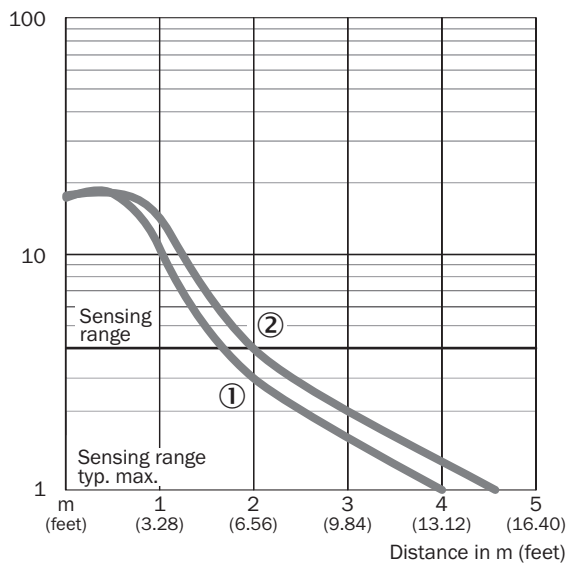


- ① Reflector PLV14-A / PLH25-M12 / PLH25-D12
- ② Reflector P41F / reflective tape REF-AC1000

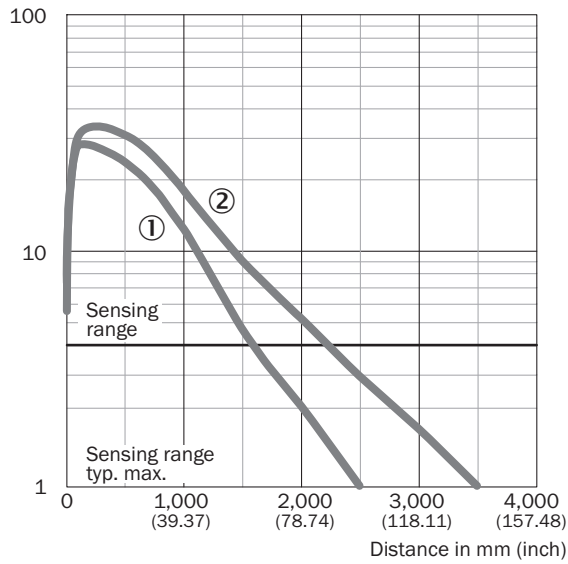

- ① Reflector PLV14-A / PLH25-M12 / PLH25-D12
- ② Reflector P41F / reflective tape REF-AC1000

Light spot size

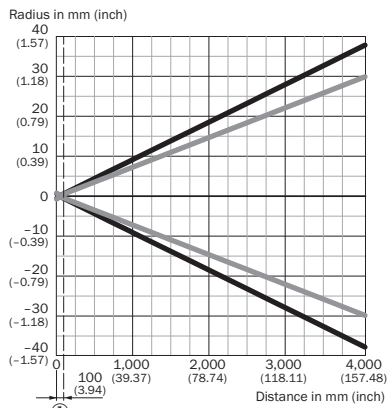


Dimensions in mm (inch)

| Sensing range | Vertical | Horizontal |
|-----------------------------|---------------|---------------|
| 60 mm (2.36) | 0.4 (0.02) | 0.4 (0.02) |
| 200 mm (7.87) | 3.2 (0.13) | 2.4 (0.09) |
| 2,000 mm (78.74) | 40 (1.57) | 30 (0.18) |
| 3,500 mm (137.80) | 60 (2.36) | 50 (1.97) |



- Vertical
- Horizontal

- ① Minimum distance between sensor and reflector

Light spot size (detailed view)

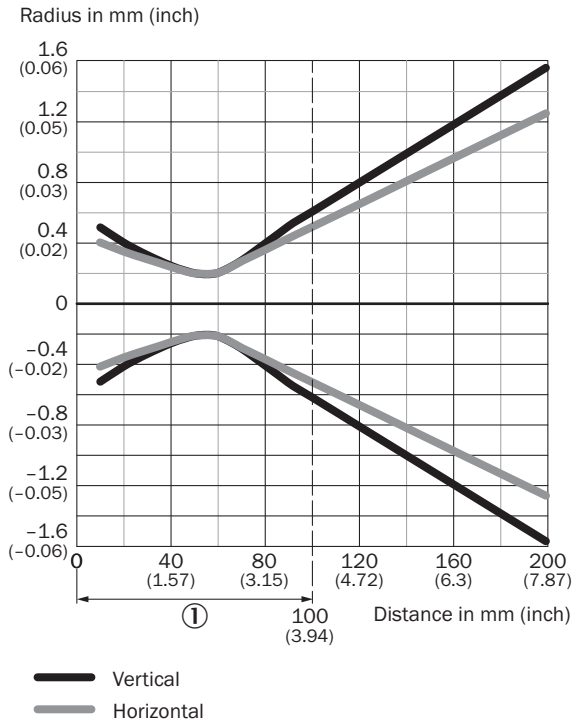


Sensing range diagram

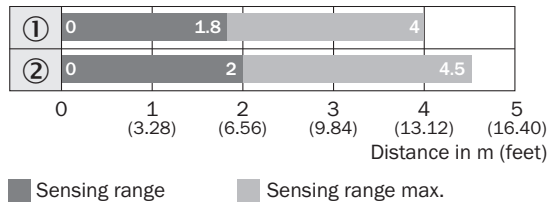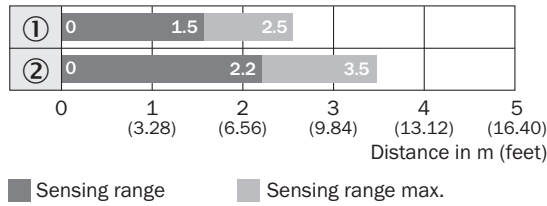

- ① Reflector PLV14-A / PLH25-M12 / PLH25-D12
- ② Reflector P41F / reflective tape REF-AC1000

Dimensional drawing (Dimensions in mm (inch))

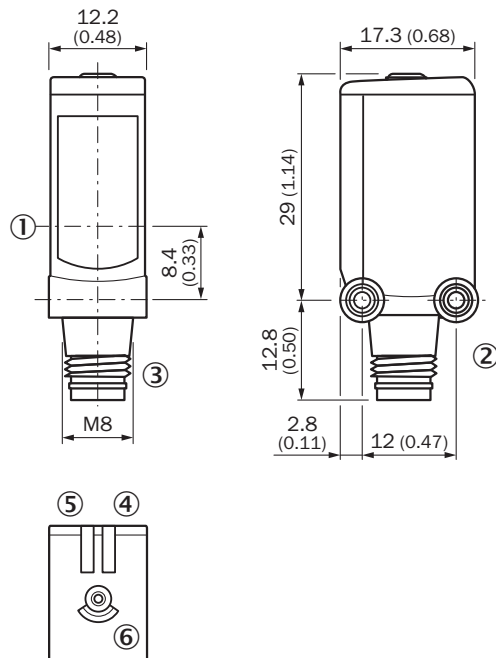


WL4SL-3, WL4SLG-3, WSE4SL-3, plug












- ① Center of optical axis
- ② Threaded mounting hole M3
- ③ Connection
- ④ LED indicator green: Supply voltage active
- ⑤ LED indicator yellow: Status of received light beam
- ⑥ Single teach-in button

Recommended accessories

Other models and accessories → www.sick.com/W4SLG-3

| | Brief description | Type | Part no. |
|---|--|--------------|----------|
| Universal bar clamp systems | | | |
|  | Plate N02 for universal clamp bracket, Zinc plated steel (sheet), Zinc die cast (clamping bracket), Universal clamp (5322626), mounting hardware | BEF-KHS-N02 | 2051608 |
| | Plate N02N for universal clamp bracket, Stainless steel 1.4571 (sheet), Stainless steel 1.4408 (clamp), Universal clamp (5322626), mounting hardware | BEF-KHS-N02N | 2051618 |
|  | Plate N08 for universal clamp bracket, Zinc plated steel (sheet), Zinc die cast (clamping bracket), Universal clamp (5322626), mounting hardware | BEF-KHS-N08 | 2051607 |
| | Plate N08N for universal clamp bracket, Stainless steel 1.4571 (sheet), Stainless steel 1.4408 (clamp), Universal clamp (5322626), mounting hardware | BEF-KHS-N08N | 2051616 |
| Device protection (mechanical) | | | |
|  | Safety bracket for floor mounting, Stainless steel 1.4571, mounting hardware included | BEF-SW-W4S | 2051497 |

| | Brief description | Type | Part no. |
|---|---|---------------|----------|
| Plug connectors and cables | | | |
|  | Head A: female connector, M8, 4-pin, straight Head B: open cable ends Cable: PVC, unshielded, 2 m | DOL-0804-G02M | 6009870 |
| | Head A: female connector, M8, 4-pin, straight Head B: open cable ends Cable: PVC, unshielded, 5 m | DOL-0804-G05M | 6009872 |
|  | Head A: female connector, M8, 4-pin, angled Head B: open cable ends Cable: PVC, unshielded, 2 m | DOL-0804-W02M | 6009871 |
| | Head A: female connector, M8, 4-pin, angled Head B: open cable ends Cable: PVC, unshielded, 5 m | DOL-0804-W05M | 6009873 |
|  | Head A: female connector, M8, 4-pin, straight Head B: - Cable: unshielded | DOS-0804-G | 6009974 |
|  | Head A: female connector, M8, 4-pin, angled Head B: - Cable: unshielded | DOS-0804-W | 6009975 |
| Reflectors | | | |
|  | Reflector with microprismatic reflex tape REF-AC1000, suitable for laser sensors, see alignment note, 23 mm x 23 mm, PMMA/ABS, Screw-on, 2 hole mounting | P41F | 5315128 |
|  | Suitable for laser sensors, self-adhesive, cut, see alignment note, 56.3 mm x 56.3 mm, self-adhesive | REF-AC1000-56 | 4063030 |
|  | Stainless steel reflector, hygienic design, chemically resistant, enclosure rating IP69K, D12 adapter shaft, 25 mm x 25 mm, Stainless steel V4A (1.4404, 316L), D12-adapter shaft | PLH25-D12 | 2063404 |
|  | Stainless steel reflector, hygienic design, chemically resistant, Enclosure rating IP 69K, M12-adapter thread, 25 mm x 25 mm, Stainless steel V4A (1.4404, 316L), M12-adapter thread | PLH25-M12 | 2063403 |
|  | Stainless steel reflector, washdown design, chemically resistant, IP 69K enclosure rating, screw connection, 14 mm x 14 mm, Stainless steel V4A (1.4404, 316L), Screw-on, 2 hole mounting | PLV14-A | 2063405 |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com