




1. Mechanical Dimensions:

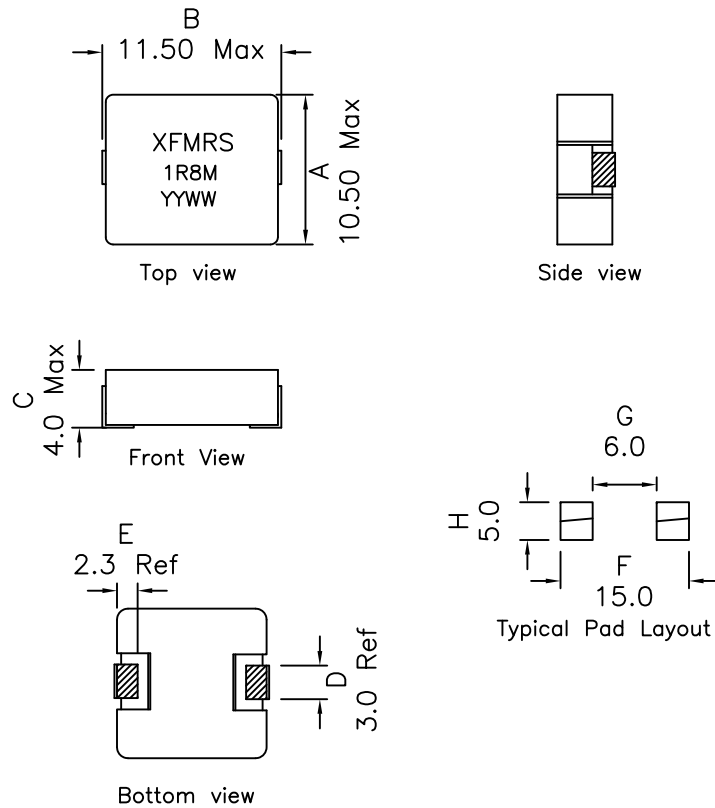

L vs IDC

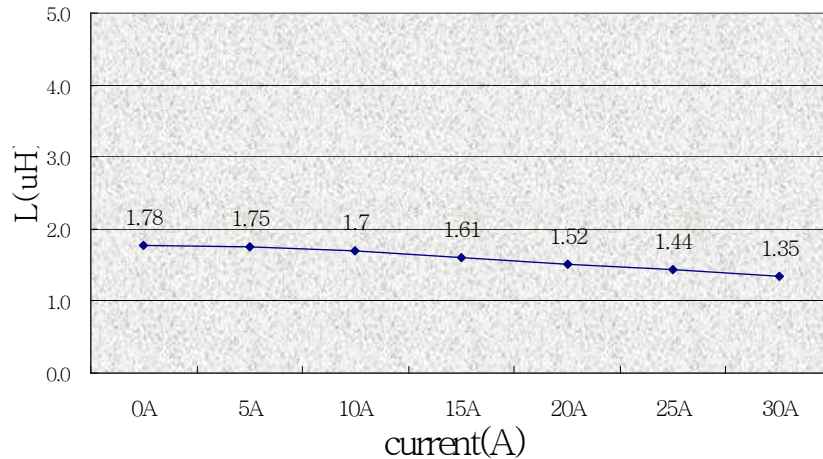

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 1.8uH±20% @100KHz, 0.1V

Q: 23 Min @100KHz, 0.1V

DCR: 5.0mOhms Max

Irated: 17A Typ(Based on 40°C Temp Rise)

I_{sat}: 16A Typ(Based on 20% drop in OCL)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component
11. Outsourced item processed & controlled under XFMRs QA system

XFMRs Inc www.XFMRs.com	Title: XFHCL11 SERIES INDUCTORS		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XFHCL11-1R8M	REV. A
SHEET 1 OF 1	DWN.	Yuan	Aug-26-13
	CHK.	YK Liao	Aug-26-13
	APP.	BW	Aug-26-13

DOC. REV: A/2

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.