

RECTIFIER DIODE

AUS501HF

Repetitive voltage up to

600 V

Mean forward current

5103 A

Surge current

45 kA
FINAL SPECIFICATION


Mar. 17 - Issue: 4

Symbol	Characteristic	Conditions	Tj [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		190	600	V
V _{RSM}	Non-repetitive peak reverse voltage		190	700	V
I _{RRM}	Repetitive peak reverse current	V=VRRM	190	75	mA
CONDUCTING					
I _{F(AV)}	Mean forward current	180° sin, 50 Hz, Th=85°C, double side cooled		5103	A
I _{F(AV)}	Mean forward current	180° sin, 50 Hz, Tc=55°C, double side cooled		8136	A
I _{FSM}	Surge forward current	Sine wave, 10 ms without reverse voltage	190	45	kA
I ² t	I ² t			10125 x 10 ³	A²s
V _{FM}	Forward voltage	Forward current = 6000 A	25	1,35	V
V _{F(TO)}	Threshold voltage		190	0,84	V
r _F	Forward slope resistance		190	0,050	mohm
SWITCHING					
t _{rr}	Reverse recovery time		190		µs
Q _{rr}	Reverse recovery charge				µC
I _{rr}	Peak reverse recovery current				A
MOUNTING					
R _{th(j-c)}	Thermal impedance, DC	Junction to case, double side cooled		14,0	°C/kW
R _{th(c-h)}	Thermal impedance	Case to heatsink, double side cooled		5,0	°C/kW
T _j	Operating junction temperature			-30 / 190	°C
F	Mounting force			25.0 / 50.0	kN
	Mass			50	g
ORDERING INFORMATION : AUS501HF S 06					
standard specification VRRM/100					


DISSIPATION CHARACTERISTICS

SQUARE WAVE

Th [°C]


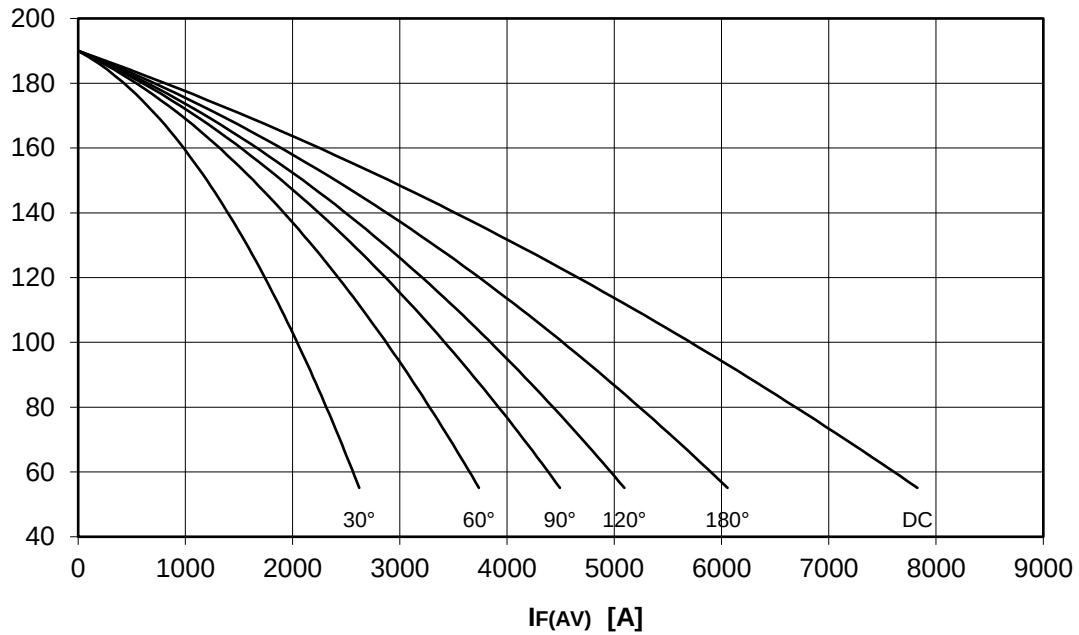


P_{F(AV)} [W]

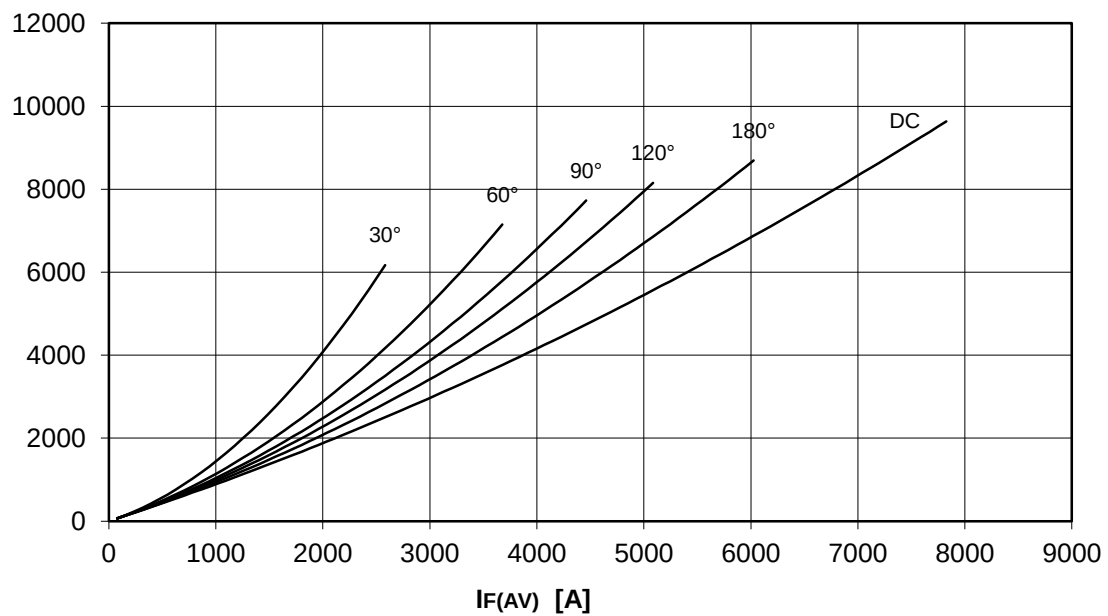


DISSIPATION CHARACTERISTICS


SINE WAVE

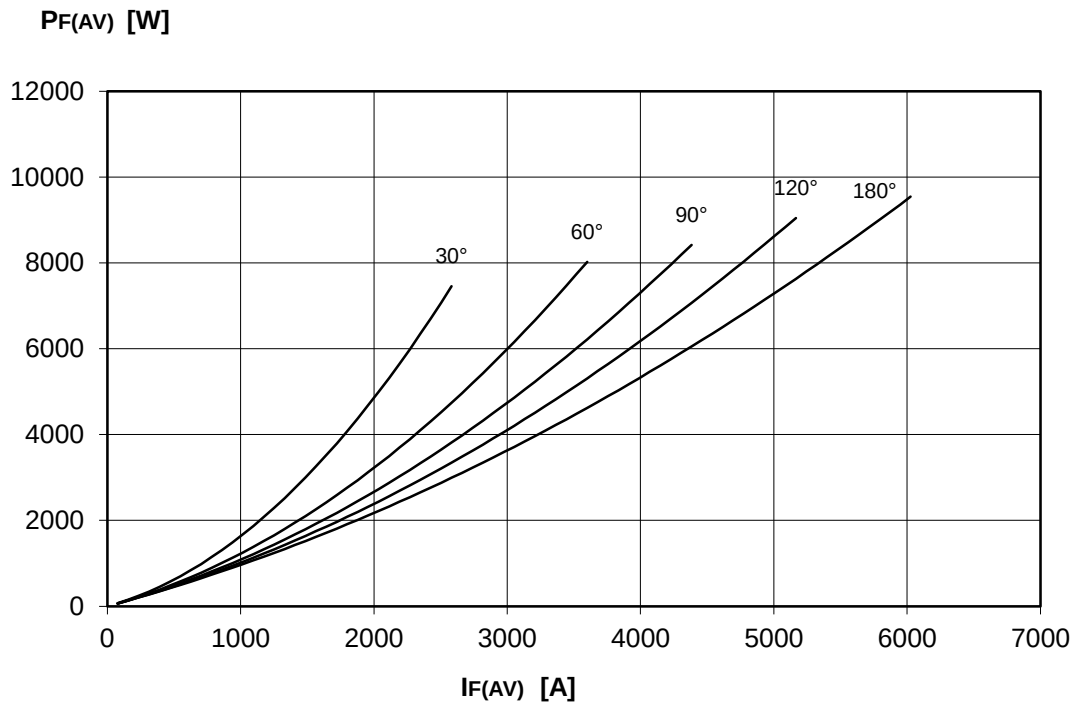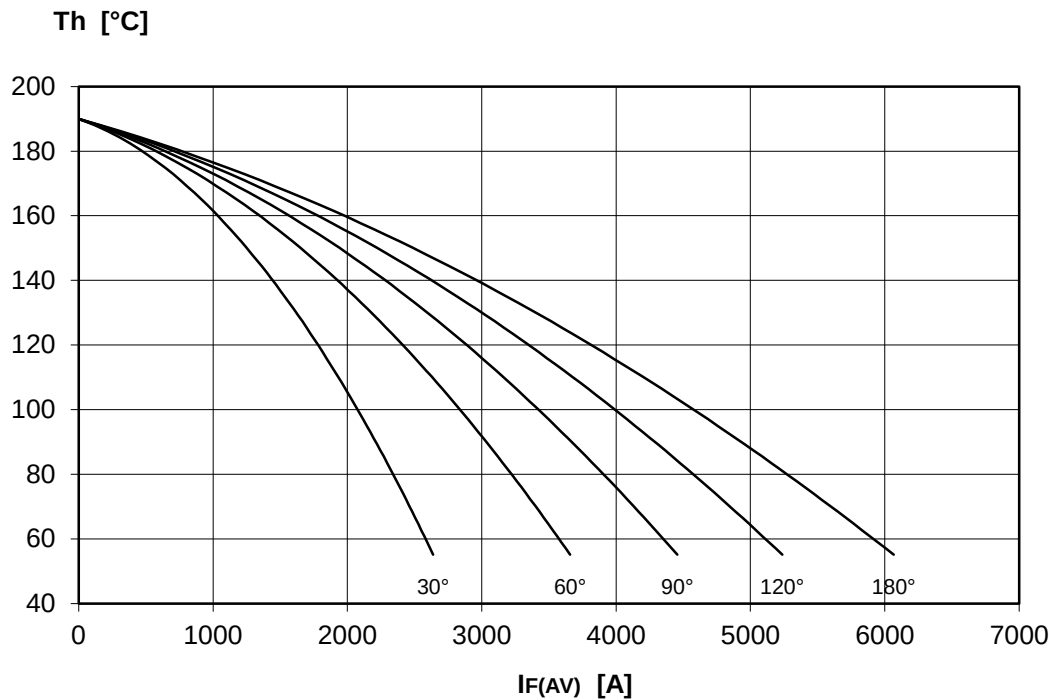



FORWARD CHARACTERISTIC
 $T_J = 190^\circ\text{C}$

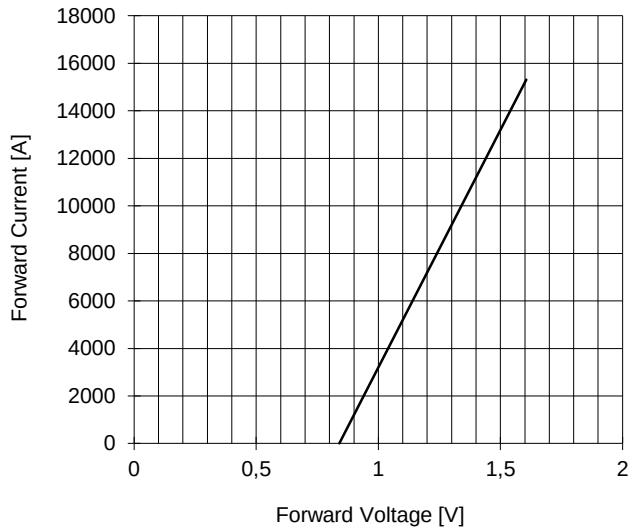

SURGE CHARACTERISTIC
 $T_J = 190^\circ\text{C}$

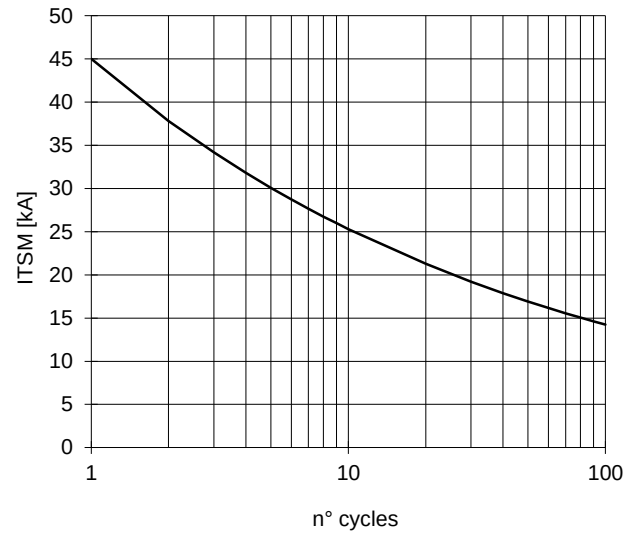

TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLED

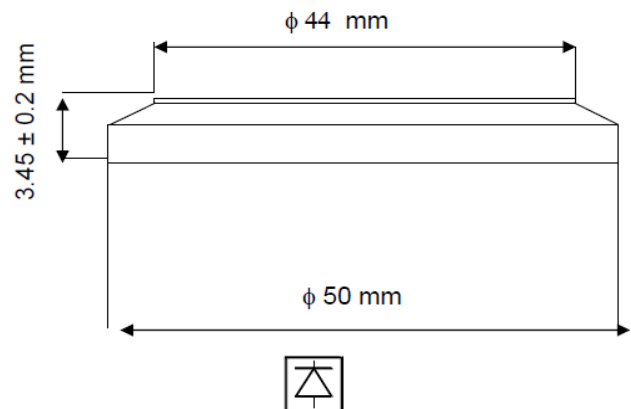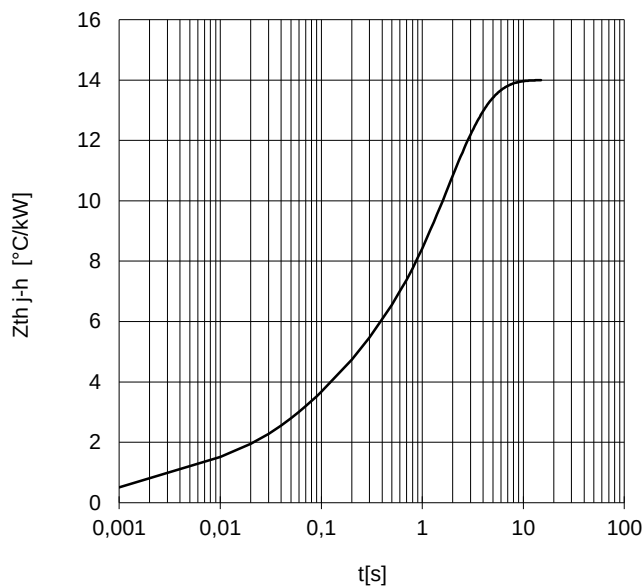

All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness $< .03 \text{ mm}$ and roughness $< 2 \mu\text{m}$.
In the interest of product improvement POSEICO SpA reserves the right to change any data given in this data sheet at any time without previous notice.
If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by

