
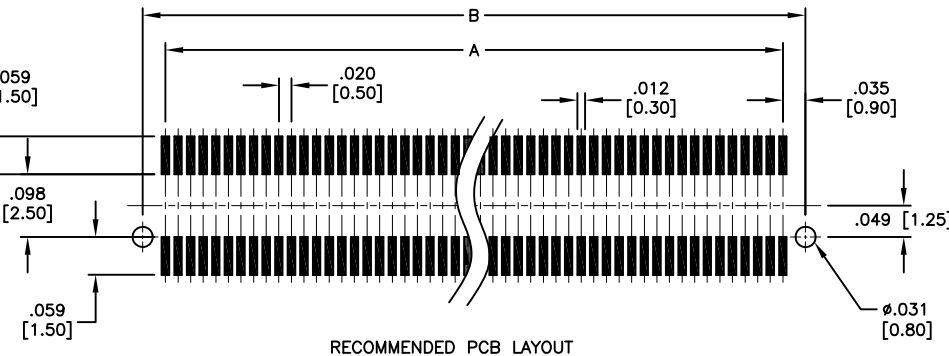



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/20/15	

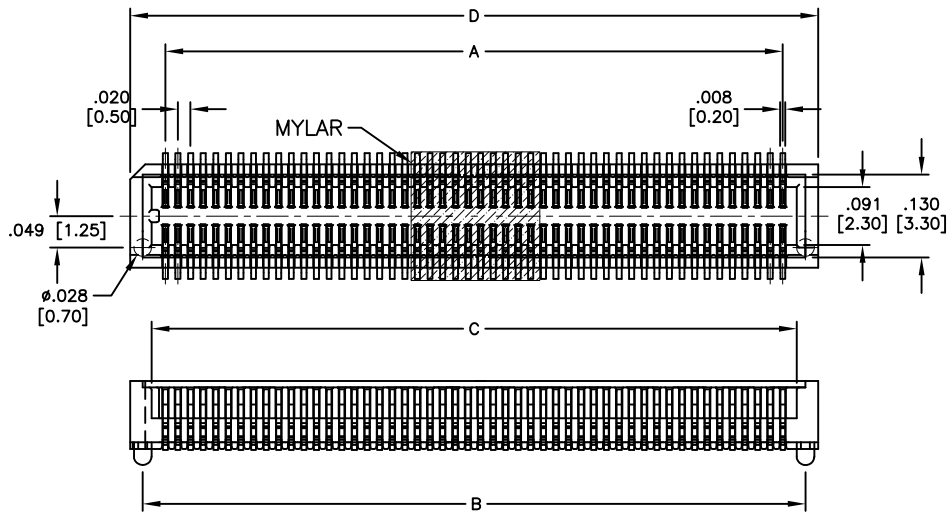

ADAM P/N	Plug DIM. (X.XX)	DIM.(X.XX)	Mating Height
BB5-SL-XXX-G-2.74-KT-T/R	.094 [2.40]	.108 [2.74]	.138 [3.50]
BB5-SL-XXX-G-2.74-KT-T/R	.108 [2.74]	.108 [2.74]	.157 [4.00]
BB5-SL-XXX-G-3.70-KT-T/R	.094 [2.40]	.146 [3.70]	.177 [4.50]
BB5-SL-XXX-G-3.70-KT-T/R	.108 [2.74]	.146 [3.70]	.197 [5.00]

Mated with: BB5-PL-XXX-G-X.XX-KT-T/R

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Operating voltage: 50 V
 Current rating: 0.5 A
 Contact resistance: 40 mohms max.
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -20°C to +105°C
 Environmental:
 Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Position: 20 thru 100
 A = .020 [0.50] x (No. of Contacts/2 - 1)
 B = .020 [0.50] x (No. of Contacts/2 - 1) + .071 [1.80]
 C = .020 [0.50] x (No. of Contacts/2 - 1) + .043 [1.10]
 D = .020 [0.50] x (No. of Contacts/2 - 1) + .110 [2.80]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		HOLES
.X ± .10	∅X ± .10	
.XX ± .020	∅XX ± .015	
.XXX ± .015	∅XXX ± .010	

APPROVALS		DATE
DRAWN	HR	10/20/15
CHECKED	CT	10/20/15
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .020 [0.50] PITCH BOARD TO BOARD
 SOCKET CONNECTOR, SMT TYPE, W/ MYLAR

SIZE	PART NO.	REV.
X	BB5-SL-XXX-G-X.XX-KT-T/R	-
REF: S00070T	SCALE: NTS	SHEET 1 OF 1