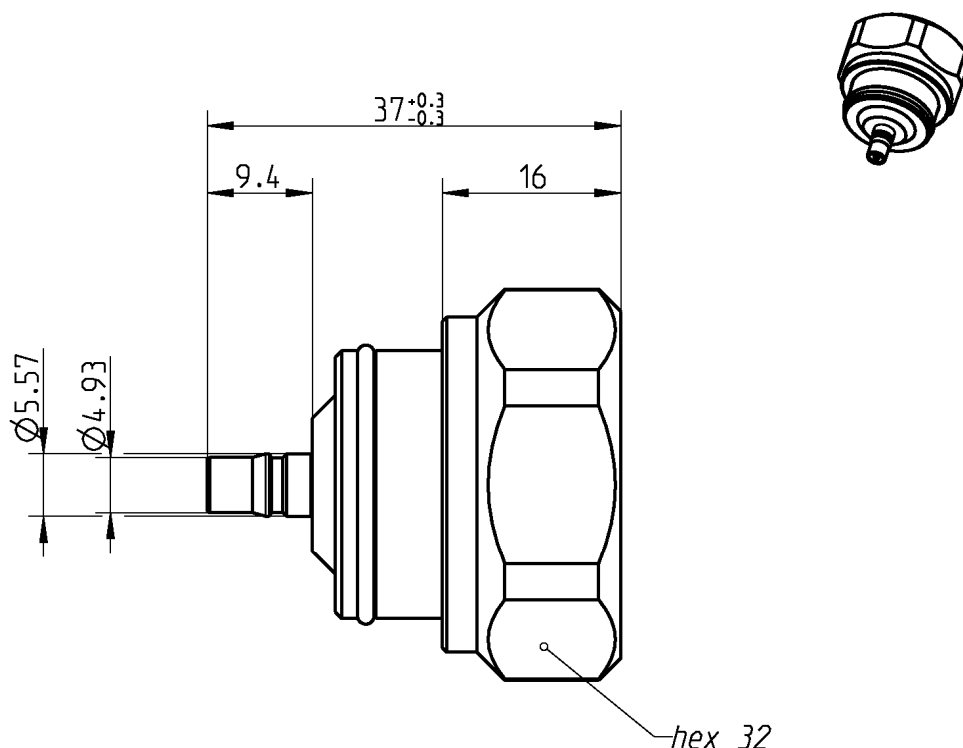


ADAPTOR
QMA JACK – 7/16 PLUG**28K160-S00N5**

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to QMA side: Rosenberger 28K000-000, series QMA
 Rosenberger is an authorised QLF® manufacturer
 7/16 side: IEC 60169-4, VG 95250, CECC 22190, DIN 47223

Documents

N/A

Material and plating**Connector parts**

Center contact
 Outer contact
 Dielectric
 Gasket

Material

Beryllium copper
 Brass
 PTFE
 Silicone

Plating

AuroDur, gold plated
 White bronze(e.g. Optalloy®)

TECHNICAL DATA SHEET

Rosenberger

ADAPTOR
QMA JACK – 7/16 PLUG

28K160-S00N5

Electrical data

Impedance	50 Ω	
Frequency	DC to 8.3 GHz	
Return loss	≥ 34 dB, DC to 2.5 GHz	
	≥ 21 dB, 2.5 to 8.3 GHz	
Insertion loss	≤ 0.03 x √f(GHz) dB	
Insulation resistance	≥ 5 x10 ³ MΩ	
Center contact resistance	≤ 3 mΩ, QMA side	≤ 0.4 mΩ, 7/16 side
Outer contact resistance	≤ 2 mΩ, QMA side	≤ 1.5 mΩ, 7/16 side
Test voltage	1000 V rms	
Working voltage	480 V rms	
RF-leakage	≥ 95 dB up to 2 GHz	
	≥ 80 dB up to 4 GHz	
	≥ 70 dB up to 6 GHz	
Intermodulation (3 rd order)	≤ -120 dBm @ 2 x 20 W, 1800 MHz	

Mechanical data

	QMA side	7/16 side
Mating cycles	min. 100	min. 500
Coupling nut retention	N/A	≥ 1000 N
Center contact captivation: axial	≥ 200 N	≥ 200 N
Coupling test torque	N/A	max. 35 Nm
Recommended torque	N/A	25 to 30 Nm
Engagement force	typ. 25 N	N/A
Disengagement force	typ. 20 N	N/A
Retention force for interface	60 N min.	N/A

Environmental data

Temperature range	-40°C to +85°C
Storage temperature	-40°C to +85°C
Thermal shock	IEC 60169-1 16.4 (-40 / +85°C)
Corrosion	IEC 60169-1 16.7 (48 hrs)
Vibration	IEC 60068-2-64 random
Damp heat, steady state	IEC 60169-1 16.3 (96 hrs)
RoHS	compliant

Tooling

N/A

Suitable cables

N/A

Weight

Weight 91 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
A. König	14/02/05	Sa. Krautenbacher	13.03.14	d00	14-0352	T. Krojer	13.03.14
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de					Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: info@rosenberger.de		Page 2 / 2