



## 306DER2R5SKW

Radial lead, +70°C

Parts are RoHS compliant

### ELECTRICAL SPECIFICATIONS

Capacitance: 30 F

Temperature Range: -25°C to +70°C

ESR (AC): 40 milliOhms Max at 20°C and 1 kHz

ESR (DC): 70 milliOhms Max at 20°C and DC

Tolerance: -20 % , +50 %

WVDC: 2.5 Volts DC

SVDC: 2.7 Volts DC

Weight: 8.271 grams

Maximum stored energy: 26.042 Watt hours

Volume: 6.032 ml

Maximum Current: 12.1 Amps (1 second discharge to 1/2 the rated voltage)

Operating Current: 7.5 Amps (5 sec discharge to 1/2 rated voltage)

Leakage Current: 0.07 mA after 72 hours

Specific Energy:

Specific Power:

Gravimetric Density: 3.1486 Wh/kg

Volumetric Density: 4.3174 Wh/l

Gravimetric Density: 1.2954 kW/kg

Volumetric Density: 1.7763 kW/l

Load Life: 1000 hours at 70°C with 100% of rated voltage applied

Max Capacitance Change: ≤30% of initially measured value

ESR Change: ≤200% of maximum specified value

### PHYSICAL DIMENSIONS

Diameter (D): 16 mm, +/- 0.5 mm

Length (L): 30 mm, +/- 1.5 mm

Height (H): mm, +/- mm


Thickness (T): mm, +/- mm

Termination Finish: Matte Tin

Lead Spacing (S): 7.5 mm, +/-0.5 mm

Lead Diameter (d): 0.8 mm, +/-0.05 mm

Lead Length (LL): 15mm, +/- MIN mm

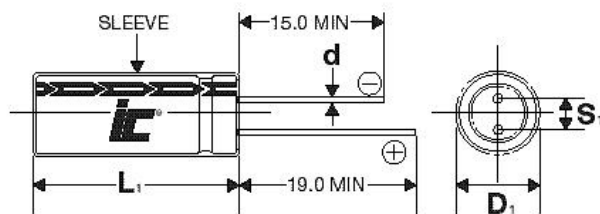

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850  
Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, [www.illcap.com.hk](http://www.illcap.com.hk)  
© Copyright 2017 Illinois Capacitor. A division of Cornell Dublier, All Rights Reserved