

- 0.2 AND 0.5 AMP SCHOTTKY BARRIER RECTIFIERS
- HERMETICALLY SEALED
- METALLURGICALLY BONDED
- DOUBLE PLUG CONSTRUCTION

1N6675 thru 1N6677  
and  
DSB0.2A20 thru DSB0.2A40  
and  
DSB0.5A20 thru DSB0.5A40

**MAXIMUM RATINGS - 0.2 AMP DEVICES**

Operating Temperature: -65°C to +125°C  
Storage Temperature: -65°C to +150°C  
Average Rectified Forward Current: 0.2 AMP @  $T_L = +100^\circ\text{C}$ ,  $= 3/8"$   
Derating: 8.0 mA / °C above  $T_L = +100^\circ\text{C}$ ,  $L = 3/8"$

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.

CDI TYPE NUMBER	WORKING PEAK REVERSE VOLTAGE	MAXIMUM FORWARD VOLTAGE			MAXIMUM REVERSE LEAKAGE CURRENT AT RATED VOLTAGE		MAXIMUM CAPACITANCE @ $V_R = 0$ VOLTS $f = 1.0$ MHz	
		$V_{RWM}$	$V_F @ 20$ mA	$V_F @ 200$ mA	$V_F @ 630$ mA	$I_R @ +25^\circ\text{C}$	$I_R @ +100^\circ\text{C}$	$C_T$
		VOLTS	VOLTS	VOLTS	VOLTS	$\mu$ A	mA	PICO FARADS
1N6675	20	0.37	0.50	0.70	5.0	0.6	50	
1N6676	30	0.37	0.50	0.70	5.0	0.6	50	
1N6677	40	0.37	0.50	0.70	5.0	0.6	50	
DSB0.2A20	20	0.37	0.50	0.70	5.0	0.6	50	
DSB0.2A30	30	0.37	0.50	0.70	5.0	0.6	50	
DSB0.2A40	40	0.37	0.50	0.70	5.0	0.6	50	

**MAXIMUM RATINGS - 0.5 AMP DEVICES**

Operating Temperature: -65°C to +125°C  
Storage Temperature: -65°C to +150°C  
Average Rectified Forward Current: 0.5 AMP @ +75°C  
Derating: 6.67 mA / °C above +75°C

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.

CDI TYPE NUMBER	WORKING PEAK REVERSE VOLTAGE	MAXIMUM FORWARD VOLTAGE		MAXIMUM REVERSE LEAKAGE CURRENT AT RATED VOLTAGE		MAXIMUM CAPACITANCE @ $V_R = 0$ VOLTS $f = 1.0$ MHz	
		$V_{RWM}$	$V_F @ 0.1$ A	$V_F @ 0.5$ A	$I_R @ +25^\circ\text{C}$	$I_R @ +100^\circ\text{C}$	$C_T$
		VOLTS	VOLTS	VOLTS	$\mu$ A	mA	PICO FARADS
DSB0.5A20	20	0.50	0.65	10.0	1.0	60	
DSB0.5A30	30	0.50	0.65	10.0	1.0	60	
DSB0.5A40	40	0.50	0.65	10.0	1.0	60	

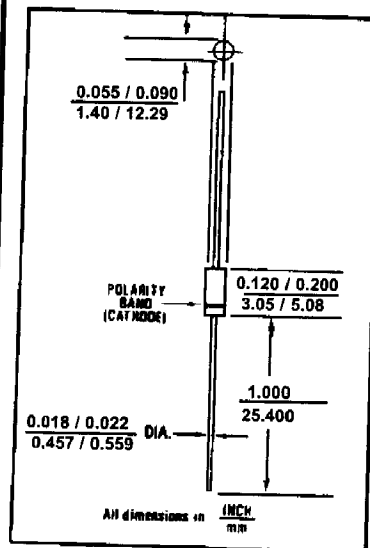


FIGURE 1

**DESIGN DATA**

CASE: Hermetically sealed, DO-35

LEAD MATERIAL: Copper clad steel


LEAD FINISH: Tin / Lead

THERMAL RESISTANCE: ( $R_{\theta JEC}$ ): 250 °C/W maximum at  $L = .375$  inch

THERMAL IMPEDANCE: ( $Z_{\theta JX}$ ): 20 °C/W maximum

POLARITY: Cathode end is banded.

MOUNTING POSITION: Any



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.