
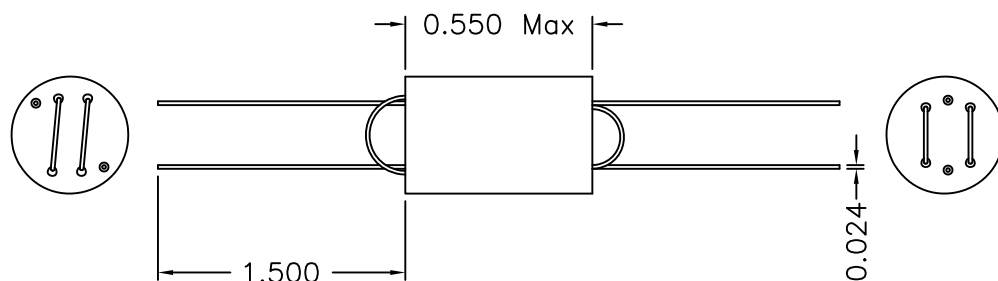


## 1. Mechanical Dimensions:

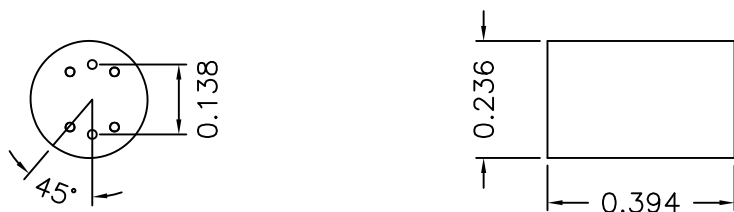


### Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/3

## 2. Schematic:

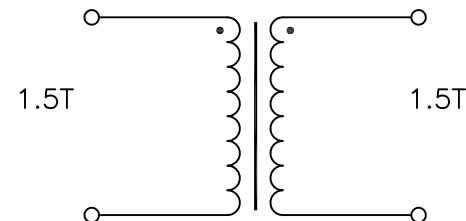

## 3. Electrical Specifications: @25°C

Z: 215 Ohms  $\pm 25\%$  @10MHz

Z: 415 Ohms  $\pm 25\%$  @100MHz

<b>XFMRs Inc</b>	Title: WIDE-BAND CHOKES		
	UNLESS OTHERWISE SPECIFIED	P/N: XFEB20011-3B	REV. A
TOLERANCES: .xxx $\pm 0.010$	DWN.	Yuan	Jul-25-13
Dimensions in Inch	CHK.	YK Liao	Jul-25-13
SHEET 1 OF 1	APP.	BSJ	Jul-25-13