

# AR0233AT

## Product Preview

# 1/2.5" 2.6-Megapixel HDR + LFM Automotive Sensor for ADAS & Viewing Systems

With new requirements being added to the New Car Assessment Program (NCAP), Advanced Driver Assistance Systems (ADAS) require sensors with higher functionality to meet the evolving standards for car safety. Automotive camera systems are performing more complex algorithms at higher vehicle speeds and in new, challenging lighting conditions. OEMs also want to offer more features for their customers by leveraging cameras for both viewing and sensing applications.

The AR0233AT image sensor delivers exceptional sensitivity for a wide variety of automotive applications. Built on a 3  $\mu\text{m}$  Back Side Illuminated (BSI) pixel, the sensor provides greater than 140 dB of dynamic range and excels in low light conditions. It features an active array size of 2048 x 1280 with 1080p output at 60 frames per second. The new pixel technology includes LED Flicker Mitigation (LFM) while maintaining high dynamic range output, limiting the appearance of flicker from LED lighting and AC sources particularly important for camera monitor system (CMS) applications as well as machine vision algorithms.

The AR0233AT is available in multiple automotive-qualified package options including iBGA, CSP, and bare die. It is ASIL-B safety design compliant per ISO26262 and supports ASIL-B or higher safety-ratings for camera systems. The sensor is compatible with image signal processor (ISP) companion chips from ON Semiconductor as well as third party ISPs.

### Features


- New 3.0  $\mu\text{m}$  Dual Conversion Gain BSI Pixel Technology
- Multi-Exposure Mode for >140dB High Dynamic Range
- Full Resolution LED Flicker Mitigation with 120 dB High Dynamic Range
- >95 dB dynamic range from one exposure
- ASIL-B safety design, ISO26262 compliant
- Low-noise, low-power analog architecture
- Generation-3 Motion Compensation
- Adaptive Noise Reduction Filter
- Advanced Context Switching
- 4-lane MIPI CSI-2 Interface
- 2048 x 1280 at 45 Frames per Second
- 1920 x 1080 at 60 Frames per Second

This document contains information on a product under development. ON Semiconductor reserves the right to change or discontinue this product without notice.



ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

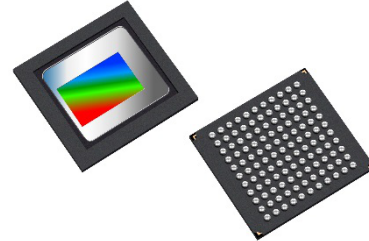

TBD  
SUFFIX  
TBD Number

### ORDERING INFORMATION

Device	Package	Shipping
TBD	TBD	TBD

### Specifications

- Optical format – 1/2.5"
- Active pixels – 2048 x 1280
- Pixel size – 3.0  $\mu\text{m}$
- Color filter array – RGB, RCGG & RCCB
- Interface – MIPI CSI-2, Parallel
- Max dynamic range – 140 dB (4-exp), 120 dB (3-exp)
- Package options – iBGA, CSP, Bare Die


### Applications

- Front View Camera (ADAS)
- High-end Surround View and RVC
- ADAS + Viewing Fusion
- Camera Monitor Systems for Mirror Replacement

# AR0233AT

## PACKAGE DIMENSIONS

TBD  
CASE TBD  
ISSUE TBD

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local  
Sales Representative