


# G3A THRU G3M

## Glass Passivated Junction Rectifier

Reverse Voltage 50 to 1000 V  
Forward Current 3.0 A

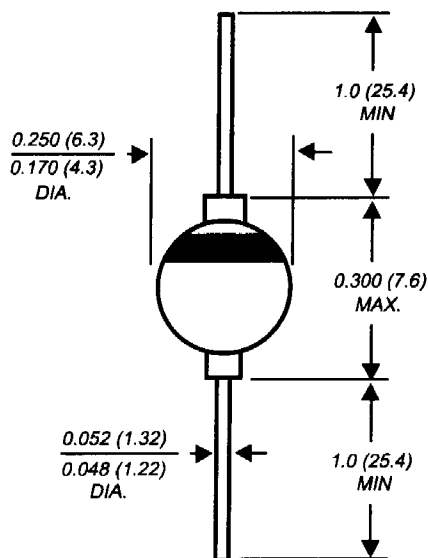

Dimensions in inches and (millimeters)

\* Brazed-lead assembly is covered by Patent No. 3,930,306

### Features

- High temperature metallurgically bonded constructed rectifiers
- Cavity-free glass passivated junction
- Hermetically sealed package
- 3.0 ampere operation at  $T_A=70^\circ\text{C}$  with no thermal runaway
- Typical  $I_R$  less than  $0.1\mu\text{A}$
- Capable of meeting environmental standards of MIL-S-19500
- High temperature soldering guaranteed:  $350^\circ\text{C}/10$  seconds,  $0.375"$  (9.5mm) lead length, 5 lbs. (2.3kg) tension

### Mechanical Data

**Case:** Solid glass body

**Terminals:** Solder plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.04 ounce, 1.1 grams

### Maximum Ratings & Thermal Characteristics Ratings at $25^\circ\text{C}$ ambient temperature unless otherwise specified.

	SYMBOLS	G3A	G3B	G3D	G3G	G3J	G3K	G3M	UNITS
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	70	200	400	600	800	1000	V
Maximum average forward rectified current $0.375"$ (9.5mm) lead length at $T_A=70^\circ\text{C}$	$I_{F(AV)}$	3.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	125							A
Maximum full load reverse current, full cycle average $0.375"$ (9.5mm) lead length at $T_A=70^\circ\text{C}$	$I_{R(AV)}$	200							$\mu\text{A}$
Typical thermal resistance (NOTE 1)	$R_{\theta JA}$ $R_{\theta JL}$	20 10							$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +175							$^\circ\text{C}$

### Electrical Characteristics Ratings at $25^\circ\text{C}$ ambient temperature unless otherwise specified.

	SYMBOLS	G3A	G3B	G3D	G3G	G3J	G3K	G3M	UNITS
Maximum instantaneous forward voltage at 3.0A	$V_F$	1.2	1.1					V	
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=150^\circ\text{C}$	$I_R$	5.0 100					$\mu\text{A}$		
Typical reverse recovery time at $I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$	$t_{rr}$	3.0					$\mu\text{s}$		
Typical junction capacitance at 4.0V, 1MHz	$C_J$	40					pF		

**NOTES:**

(1) Thermal resistance from junction to ambient and from junction to lead at  $0.375"$  (9.5mm) lead length, with both leads mounted between heatsinks