


# Ceramic DUPLEXER IDD08871

## 881.5 MHz / 836.5 MHz

### Features

- Ceramic Duplexer
- Usable bandwidth 25 MHz each Rx And Tx. band
- No matching / Antenna & Transmitter & Receiver Impedance 50Ω
- Surface Mounted Module Package ( 40mm × 22mm × 9.5mm )

### Package Dimension

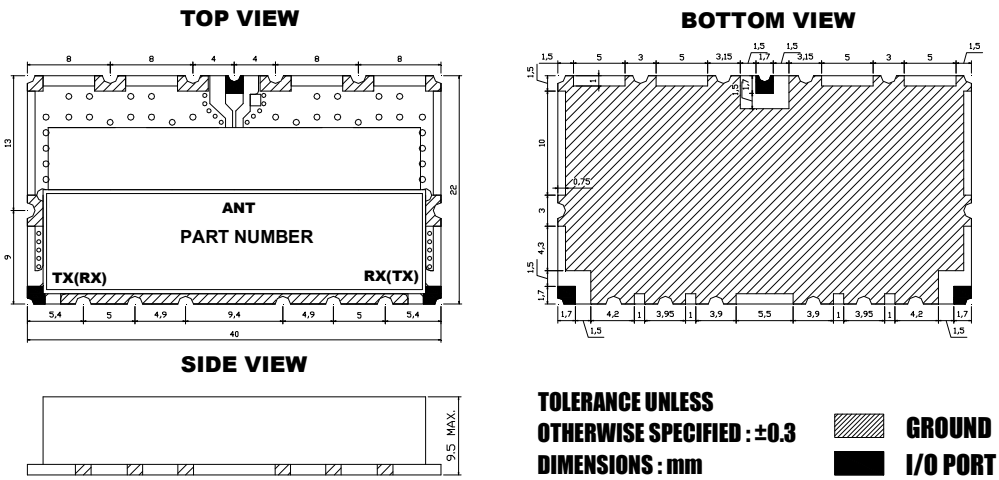


Pin Configuration	
Description	Function
RX (824 ~ 849MHz)	RECEIVER
ANT	ANTENNA
TX (869 ~ 894MHz)	TRANSMITTER

### Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	25	+85
Storage Temperature Range	°C	-40	-	+85

Electrostatics Sensitive Device (ESD)

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IDD08871	
		Rev. Date	2014-9-16	
		Rev.	AS01	1/3

# Ceramic DUPLEXER IDD08871

## 881.5 MHz / 836.5 MHz

### Specification


Fo = 881.5 MHz / 836.5 MHz

ANT to Rx		Minimum	Typical	Maximum
Insertion loss (836.5 MHz +/-12.5 MHz)	dB	-	1.8	2.0
Amplitude Ripple (836.5 MHz +/-12.5 MHz)	dB	-	0.5	0.7
Return Loss (836.5 MHz +/-12.5 MHz)	dB	18	20	-
Input power (836.5 MHz +/-12.5 MHz)	Watt	3W > 50000 Hours, CW tone (Ta=+50°C)		
Relative Attenuation 869 ~ 894 MHz	dB	52	55	-

Tx to ANT		Minimum	Typical	Maximum
Insertion loss (881.5 MHz +/-12.5 MHz)	dB	-	1.8	2.0
Amplitude Ripple (881.5 MHz +/-12.5 MHz)	dB	-	0.5	0.7
Return Loss (881.5 MHz +/-12.5 MHz)	dB	18	20	-
Input power (881.5 MHz +/-12.5 MHz)	Watt	3W > 50000 Hours, CW tone (Ta=+50°C)		
Relative Attenuation 824 ~ 849 MHz	dB	52	55	-

#### Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 3 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured absolute to insertion loss


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IDD08871	
		Rev. Date	2014-9-16	
		Rev.	AS01	2/3

# Ceramic DUPLEXER IDD08871


## 881.5 MHz / 836.5 MHz


### Frequency Response

#### Ant to Rx

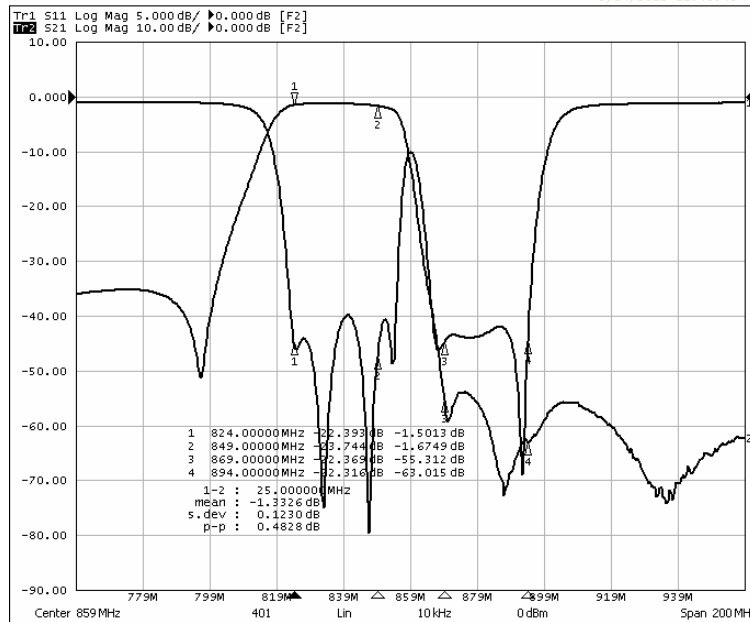

#### Tx to Ant

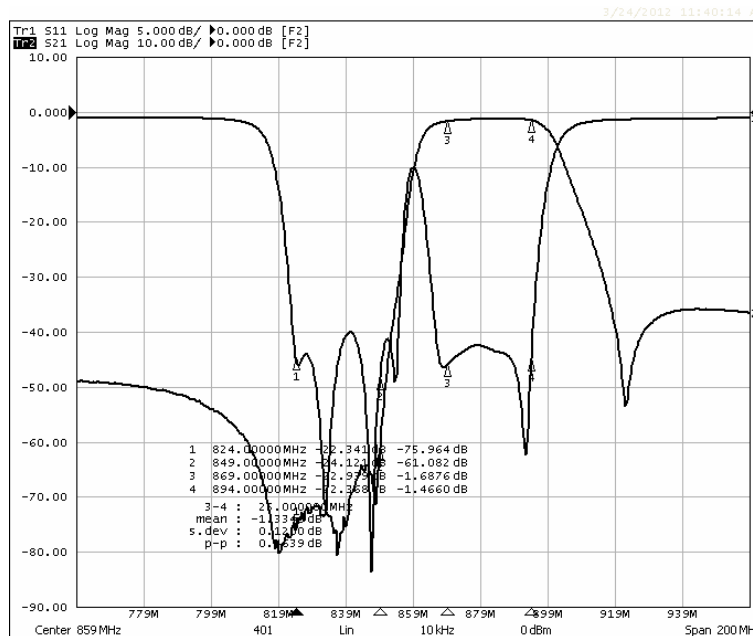

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IDD08871	
		Rev. Date	2014-9-16	
		Rev.	AS01	3/3