
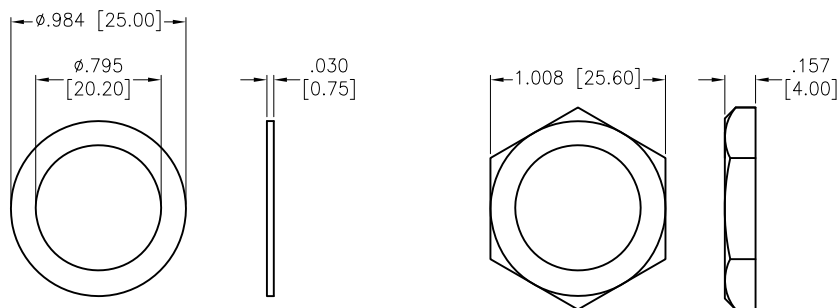



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/1/16	

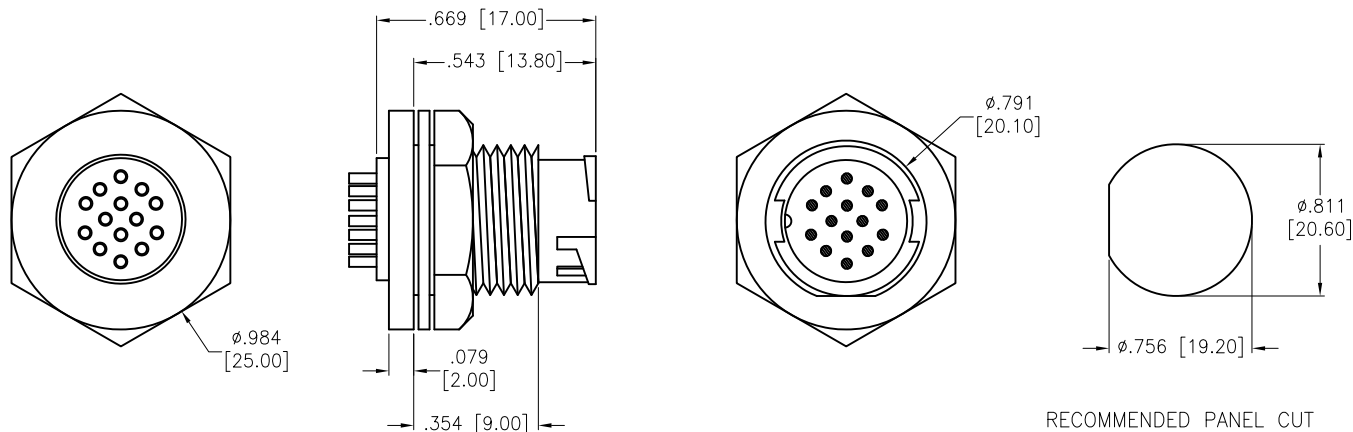

PART NO.	IP RATING
SD-CCXX-MMBPH-S6000	IP66
SD-CCXX-MMBPH-S7000	IP67
SD-CCXX-MMBPH-S8000	IP68

HEX NUT	NYLON+GF	BLACK
GASKET	EPDM	BLACK
CONTACT	BRASS, MALE PIN, GOLD FLASH	
CONNECTOR	MALE CONNECTOR, NYLON+GF	BLACK
PART NAME	DESCRIPTION	COLOR

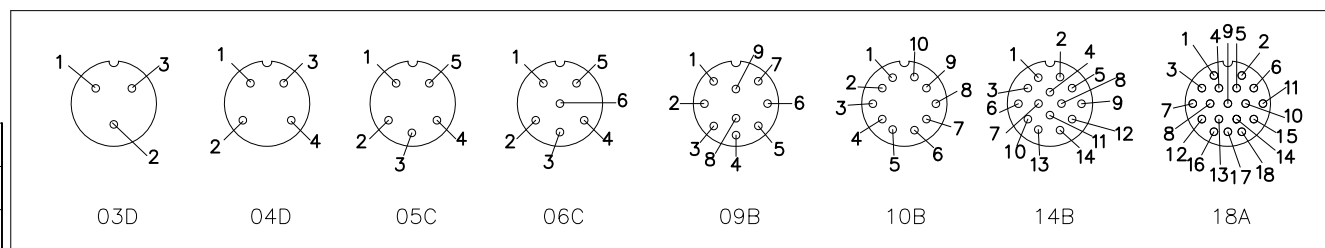

SPECIFICATIONS:
Electrical:
Current rating: XXA=2A, XXB=5A, XXC=10A, XXD=20A
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS			TITLE		
DATE			WATERPROOF CONNECTOR, MALE, C-TYPE PANEL, TWIST LOCK, SOLDER TYPE		
DRAWN	HR	6/1/16	SIZE	PART NO.	REV.
CHECKED	CK	6/1/16	X	SD-CCXX-MMBPH-SX000	-
APPROVED			REF: S00200T	SCALE: NTS	SHEET 1 OF 1