

isc N-Channel MOSFET Transistor


2SK758

DESCRIPTION

- Drain Current $-I_D=5A@ T_C=25^{\circ}C$
- Drain Source Voltage-
: $V_{DSS}= 250V(\text{Min})$
- Fast Switching Speed

APPLICATIONS

- high speed power switching
applications such as switching regulators, converters,
solenoid and relay drivers.

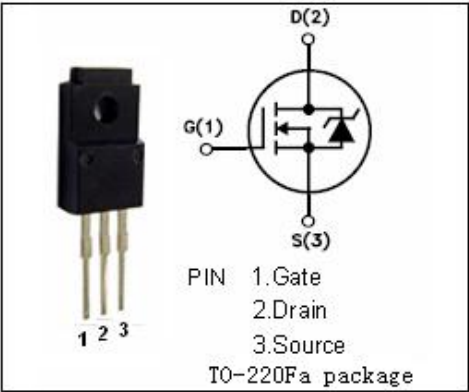


ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	ARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage ($V_{GS}=0$)	250	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current-continuous@ $TC=25^{\circ}C$	5	A
P_{tot}	Total Dissipation@ $TC=25^{\circ}C$	40	W
T_j	Max. Operating Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature Range	-55~150	$^{\circ}C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance,Junction to Case	1.0	$^{\circ}C/W$
$R_{th\ j-a}$	Thermal Resistance,Junction to Ambient	62.5	$^{\circ}C/W$

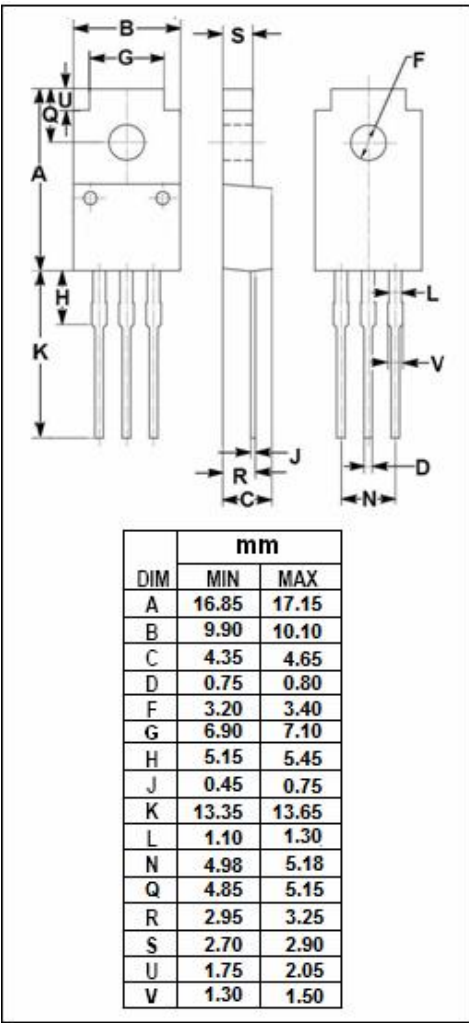

isc N-Channel Mosfet Transistor**2SK758****• ELECTRICAL CHARACTERISTICS (T_C=25°C)**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0; I _D = 10mA	250			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =10 V _{GS} ; I _D =1mA	1.0		5.0	V
R _{DS(on)}	Drain-Source On-stage Resistance	V _{GS} =10V; I _D = 3A		0.45	0.7	Ω
I _{GSS}	Gate Source Leakage Current	V _{GS} = ±20V; V _{DS} = 0			±1	uA
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =200V; V _{GS} = 0			100	uA
ton	Turn-on time	V _{GS} =10V; I _D =3A; R _L =33 Ω		30		ns
toff	Turn-off time			125		ns