

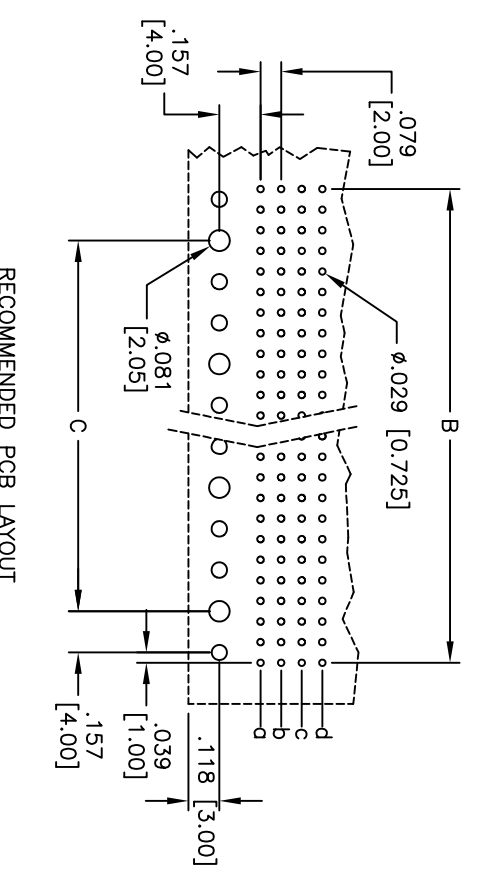


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|----------|------|
| - | | RELEASED | 12/09/09 | |

APPROVED: _____
 DATE: _____ TITLE: _____

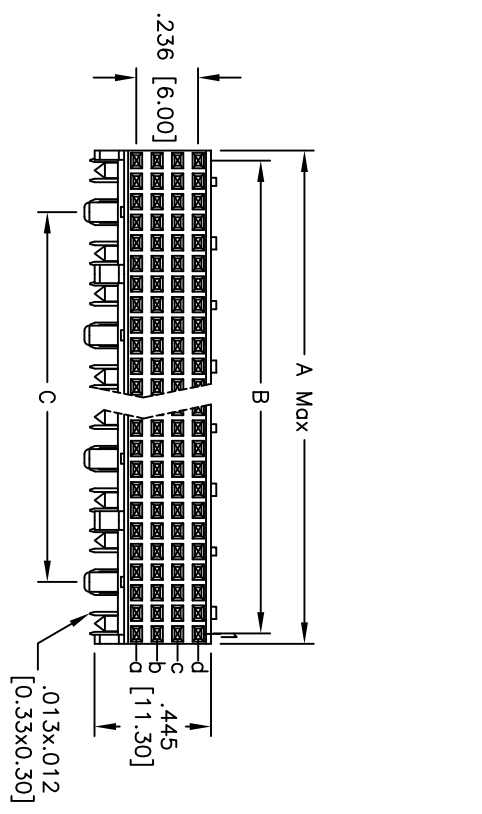

RECOMMENDED PCB LAYOUT

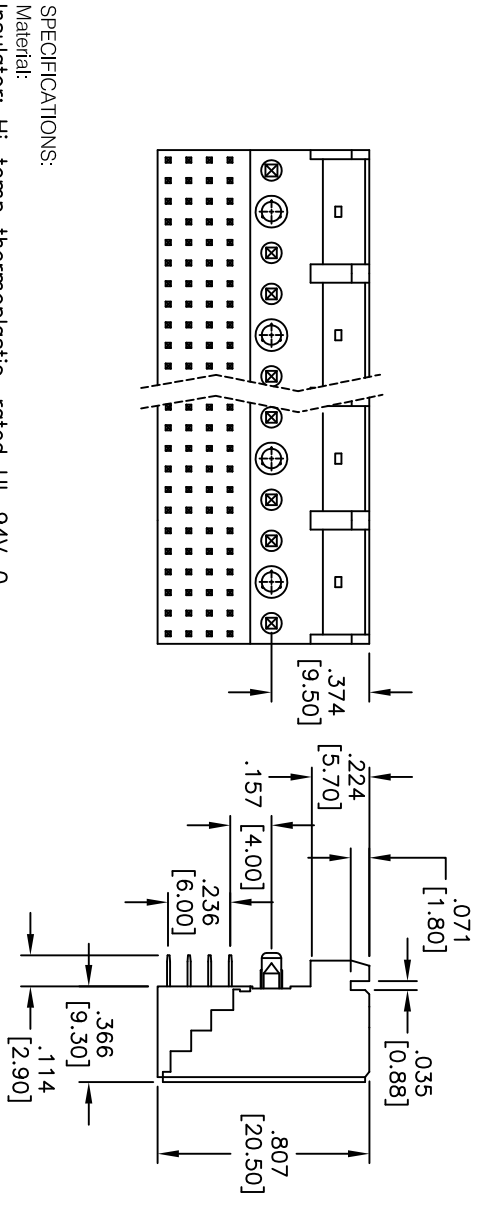

| Position | A | B | C |
|----------|---------------|---------------|---------------|
| 24 | .470 [11.95] | .394 [10.00] | - |
| 48 | .943 [23.95] | .866 [22.00] | .472 [12.00] |
| 72 | 1.415 [35.95] | 1.339 [34.00] | .945 [24.00] |
| 96 | 1.888 [47.95] | 1.811 [46.00] | 1.417 [36.00] |
| 120 | 2.360 [59.95] | 2.283 [58.00] | 1.890 [48.00] |
| 144 | 2.833 [71.95] | 2.756 [70.00] | 2.362 [60.00] |
| 168 | 3.305 [83.95] | 3.228 [82.00] | 2.835 [72.00] |
| 192 | 3.778 [95.95] | 3.701 [94.00] | 3.307 [84.00] |

SPECIFICATIONS:

Material: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Gray
 Contacts: Phosphor Bronze

Plating:
 Tin over Copper underplate overall

Electrical:
 Current rating: 1 Amp max
 Contact resistance: 30 mohms max
 Insulation resistance: 1000 Mohms min @ DC 500V
 Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:
 Operating temperature: -65°C to +125°C

Environmental:
 Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] FETURE BUS, SIGNAL, 4 ROWS
 FEMALE, RIGHT ANGLE, DIP TYPE

| | |
|--|--------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] | |
| TOLERANCES: EXCEPT AS NOTED | |
| INCHES | HOLDS |
| .X ± .10 | ± .10 |
| .XX ± .020 | ± .015 |
| .XXX ± .015 | ± .010 |
| APPROVALS | DATE |
| DRAWN | DY |
| CHECKED | |
| APPROVED | |

| | | |
|-------------|-------------|--------------|
| SIZE | PART NO. | REV. |
| X | 2FB-XX-F-ST | - |
| REF: S0058T | SCALE: NTS | SHEET 1 OF 1 |