

# Dual-Channel, 14-Bit, CCD Signal Processor with $Precision\ Timing^{TM}$ Core

AD9972

### **FEATURES OF EACH CHANNEL**

1.8 V analog and digital core supply voltage

Correlated double sampler (CDS) with

-3 dB, 0 dB, +3 dB, and +6 dB gain

6 dB to 42 dB, 10-bit variable gain amplifier (VGA)

14-bit, 40 MHz analog-to-digital converter (ADC)

Black level clamp with variable level control

Complete on-chip timing generator

Precision Timing core with 400 ps resolution @ 40 MHz

On-chip 3 V horizontal and RG drivers

100-lead, 9 mm × 9 mm, 0.8 mm pitch, CSP\_BGA package

Internal LDO regulator circuitry

# **APPLICATIONS**

Professional HDTV camcorders
Professional/high end digital cameras
Broadcast cameras
Industrial high speed cameras


## **GENERAL DESCRIPTION**

The AD9972 is a highly integrated, dual-channel CCD signal processor for high speed digital video camera applications. Each channel is specified at pixel rates of up to 40 MHz. The AD9972 consists of a complete analog front end with analog-to-digital conversion combined with a programmable timing driver. The *Precision Timing* core allows adjustment of high speed clocks with approximately 400 ps resolution at 40 MHz operation.

Each analog front end includes black level clamping, CDS, VGA, and a 40 MSPS, 14-bit ADC. The timing driver provides the high speed CCD clock drivers for the RG\_A, RG\_B, H1\_A to H4\_A, and H1\_B to H4\_B outputs. A 3-wire serial interface is used to program each channel of the AD9972.

Available in a space-saving, 9 mm  $\times$  9 mm, CSP\_BGA package, the AD9972 is specified over an operating temperature range of  $-25^{\circ}$ C to  $+85^{\circ}$ C.

# **FUNCTIONAL BLOCK DIAGRAM**

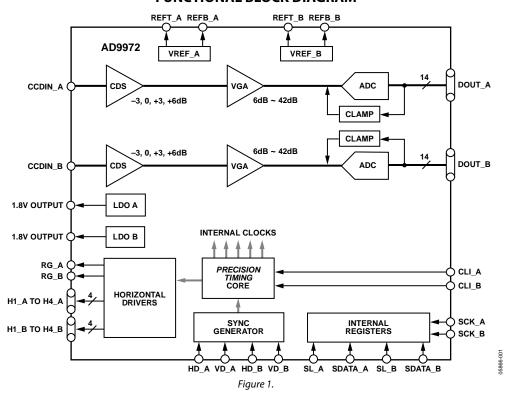

For more information on the AD9772, contact Analog Devices, Inc. at: afe.ccd@analog.com.

AD9972			

NOTES