

RF AMPLIFIER

MODEL CZ8404

Available as: CZ8404, 4 Pin TO-12 (T7)
 TN8404, 4 Pin Surface Mount (SM3)
 BX8404, Connectorized Housing (H1)

Features

- Lower Cost
- High Output Power: +17.0 dBm Typical
- Operating Temp. 0 °C to +70 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = 0 °C to +70 °C
Frequency	5 - 400 MHz	5 - 400 MHz
Gain (dB)	11.0	9.5 Min.
Power @ 1 dB Comp. (dBm)	+17.0	+15.0 Min.
Reverse Isolation (dB)	-17.5	-16.0 Max.
VSWR In	<1.50:1	2.0:1 Max.
VSWR Out	<1.75:1	2.0:1 Max.
Noise figure (dB)	<6.5	7.5 Max.
Power Vdc	+15	+15
mA	65	70 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point.....+45 dBm (Typ.)
 Second Order Two Tone Intercept Poin.....+39 dBm (Typ.)
 Third Order Two Tone Intercept Point.....+30 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 μsec Max.)

Typical Performance Data

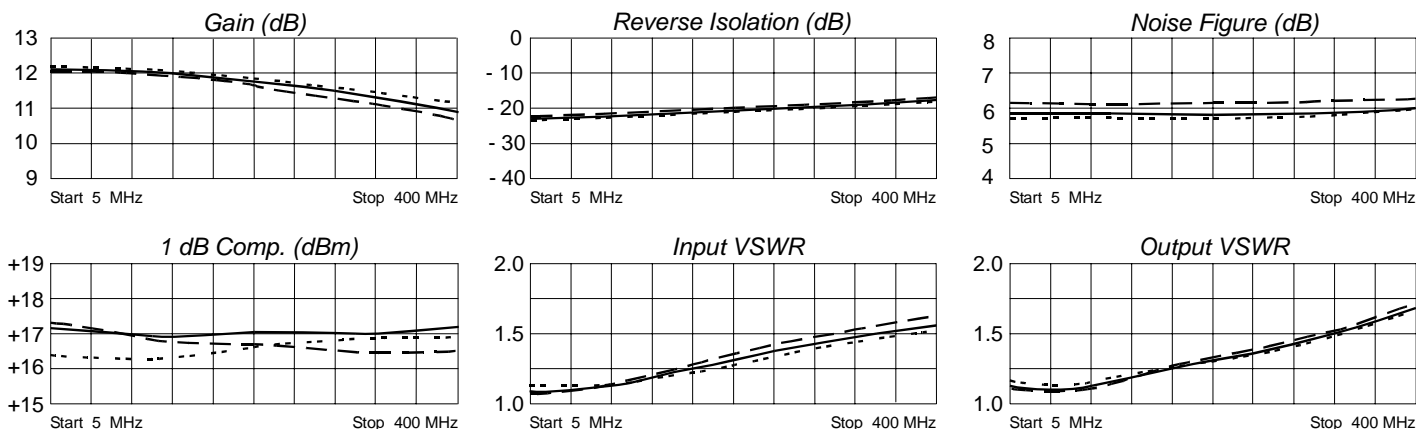

Legend ——— +25 °C - - - - +70 °C ······ 0 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.05	-145	4.06	-178	.08	4	.06	-30
50	.05	-144	4.04	165	.08	1	.06	-48
100	.08	-142	4.02	151	.08	2	.08	-77
200	.14	-153	3.91	121	.09	-0	.13	-113
300	.18	179	3.72	92	.11	-4	.19	-138
400	.22	139	3.53	62	.13	-7	.27	-162



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 03/13/06

www.SpectrumMicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001