



# RS07A THRU RS07M

PINGWEI ENTERPRISE

## 1.0AMP. SURFACE MOUNT FAST RECOVERY SURFACE MOUNT RECTIFIERS


### FEATURE

- Fast switching
- Glass passivated device
- Ideal for surface mounted applications
- Low reverse leakage
- Metallurgically bonded construction
- High temperature soldering guaranteed:  
250°C /10 seconds at terminals.

### MECHANICAL DATA

- Case: JEDEC SOD-123FL, molded plastic over passivated chip
- Terminals: Solder Plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.006 ounces, 0.02 gram
- Mounting position: Any

### SOD-123FL

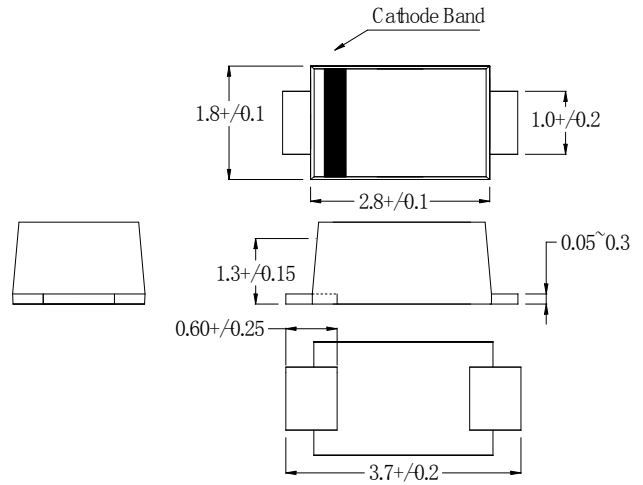

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Marking SYMBOL	RS07A	RS07B	RS07D	RS07G	RS07J	RS07K	SR07M	units
		RA	RB	RD	RG	RJ	RK	RM	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_A = 65^\circ\text{C}$ (Note 1)	$I_{F(AV)}$	1.0							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	25.0							A
Maximum Instantaneous forward Voltage at 1.0A DC	$V_F$	1.3							V
Maximum DC Reverse Current @ $T_A = 25^\circ\text{C}$ at rated DC blocking voltage @ $T_A = 125^\circ\text{C}$	$I_R$	10.0 50.0							$\mu\text{A}$
Maximum Reverse Recovery Time (Note 2)	$t_{rr}$	150				250	500		ns
Typical Junction Capacitance (Note 3)	$C_J$	4							pF
Typical Thermal Resistance (Note 3)	$R_{(JA)}$	180							$^\circ\text{C}/\text{W}$
Storage Temperature	$T_{STG}$	-55 to +150							$^\circ\text{C}$
Operation Junction Temperature	$T_J$	-55 to +150							$^\circ\text{C}$

### Note:

1. Averaged over any 20 ms period.
2. Test Conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{rr}=0.25\text{A}$
3. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
4. Measured on P. C. Board with 0.2×0.2"(5.0×5.0mm) Copper Pad Areas.