

# AZ921

## ULTRA-SENSITIVE SUBMINIATURE RELAY

### FEATURES

- 5 Amp switching capability
- Extremely small footprint utilizing only 0.16 square inch of PCB area
- Thin vertical profile only 0.2" wide
- Dielectric strength 3000Vrms contact to coil
- Bifurcated contacts available
- Epoxy sealed
- Class B (130°C) standard
- Class F (155°C) versions available
- UL, CUR file E43203
- TÜV 50243813-1



### CONTACTS

<b>Arrangement</b>	SPST (1 Form A), single button contact or bifurcated
<b>Ratings</b>	Resistive load: Max. switched power: 150W or 1250VA Max. switched current: 5A Max. switched voltage: 150VDC* or 250VAC Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.
<b>Rated Load UL, CUR</b>	5A at 250VAC, Resistive, 50k cycles [1][2][3] 3A at 250VAC, Resistive, 100k cycles [1][2][3] 5A at 30VDC, Resistive, 50k cycles [1][2][3] 3A at 30VDC, Resistive, 100k cycles [1][2][3] B300 pilot duty [3] R300 pilot duty [3]
<b>TÜV</b>	5A at 250VAC, Resistive, 50k cycles [3] 5A at 250VAC, Resistive, 100k cycles [1][2] 5A at 30VDC, Resistive, 50k cycles [3] 5A at 30VDC, Resistive, 100k cycles [1][2]
<b>Material</b>	Silver nickel (single button contact) [1] Silver nickel, gold plated (bifurcated contact) [2] Silver tin oxide (single button contact) [3] Gold plating available
<b>Resistance</b>	< 50 milliohms initially (1A, 6VDC method)

### COIL

<b>Power</b>	
<b>At Pickup Voltage (typical)</b>	58mW (5 - 18VDC) 88mW (24VDC)
<b>Max. Continuous Dissipation</b>	1.3W at 20°C (68°F) ambient
<b>Temperature Rise</b>	12°C (22°F) at nominal coil voltage (5-18 V coils) 17°C (31°F) at nominal coil voltage (24 V coil)
<b>Temperature</b>	Max. 130°C (266°F) Class B Max. 155°C (311°F) Class F

### GENERAL DATA


<b>Life Expectancy</b>	Minimum operations
<b>Mechanical</b>	20 million operations
<b>Electrical</b>	1 X 10 <sup>5</sup> at 5A, 30VDC or 250VAC
<b>Operate Time (typical)</b>	10ms at nominal coil voltage
<b>Release Time (typical)</b>	5ms at nominal coil voltage (with no coil suppression)
<b>Dielectric Strength (at sea level for 1 min.)</b>	1000Vrms between open contacts 3000Vrms contact to coil
<b>Insulation Resistance</b>	1000 megohms min. at 20°C, 500VDC, 50% RH
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Ambient Temperature</b>	At nominal coil voltage
<b>Operating</b>	-40°C (-40°F) to 85°C (185°F)
<b>Storage</b>	-40°C (-40°F) to 130°C (266°F)
<b>Vibration</b>	0.062" (1.5mm) DA at 10–55Hz
<b>Shock</b>	10g
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	3 grams

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

# AZ921


## RELAY ORDERING DATA

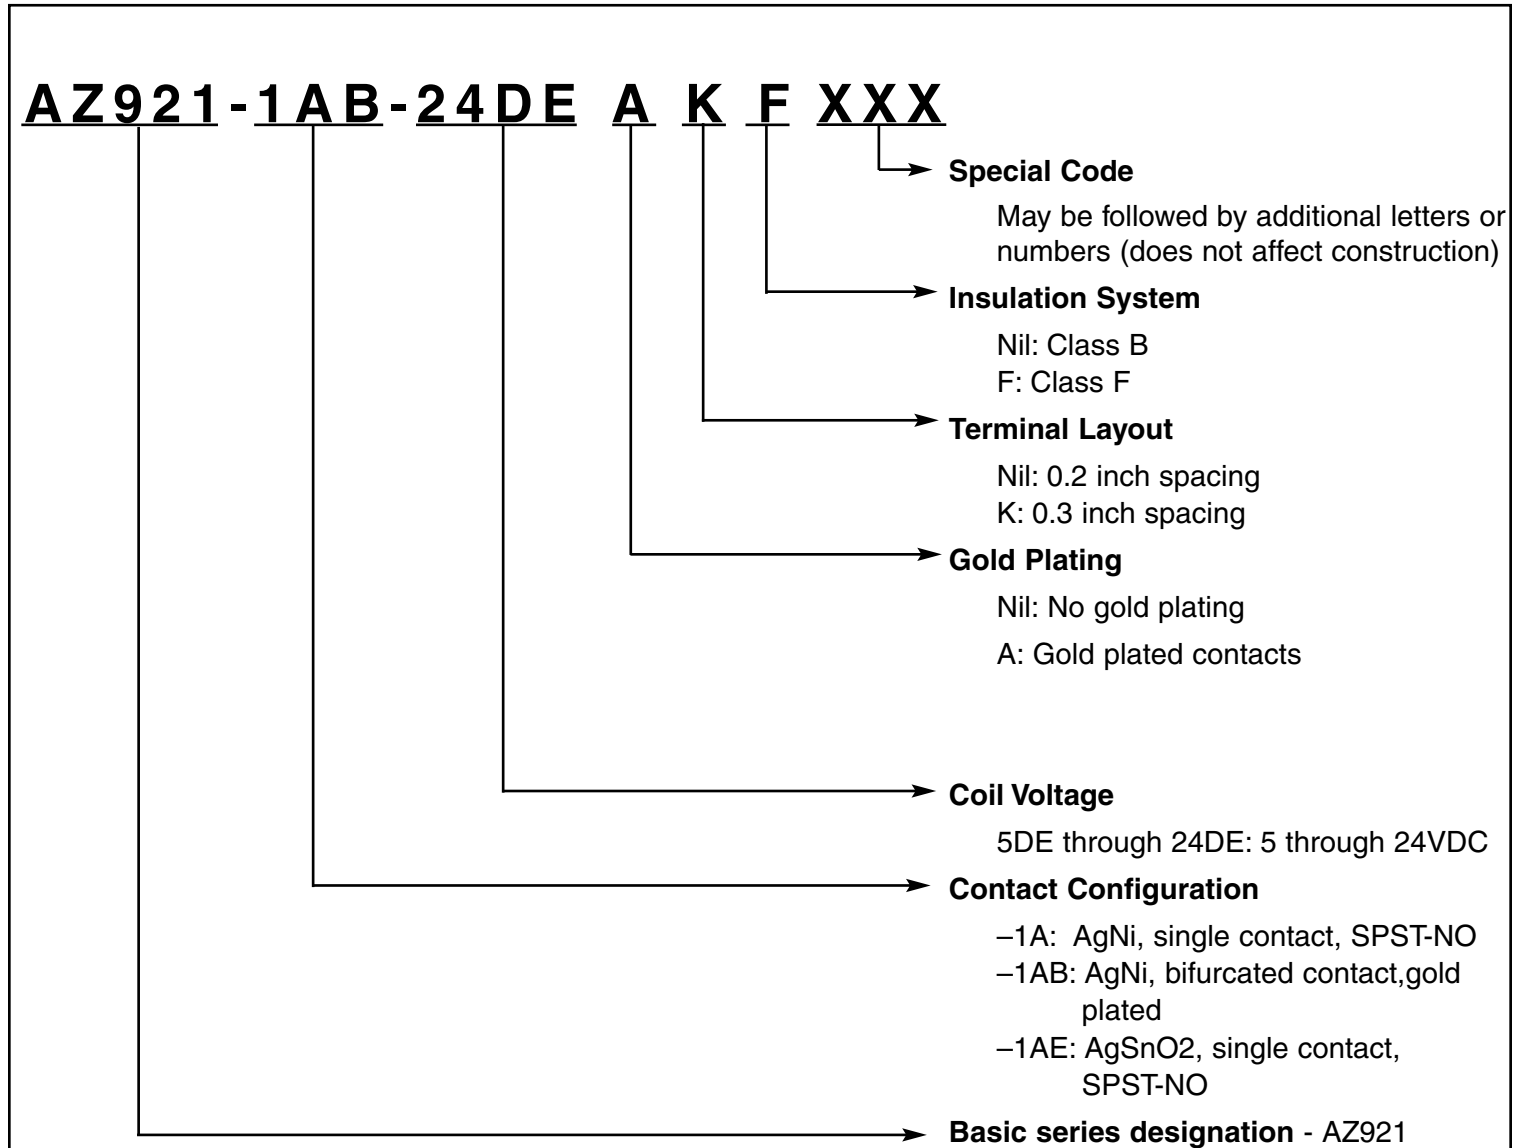

### Coil Specifications

Nominal Coil VDC	Max. Continuous VDC	Coil Resistance Ohms $\pm 10\%$	Must Operate VDC
5	16.5	208	3.5
6	19.9	300	4.2
9	29.8	675	6.3
12	39.8	1200	8.4
18	59.6	2700	12.6
24	65.0	3200	16.8

## MECHANICAL DATA

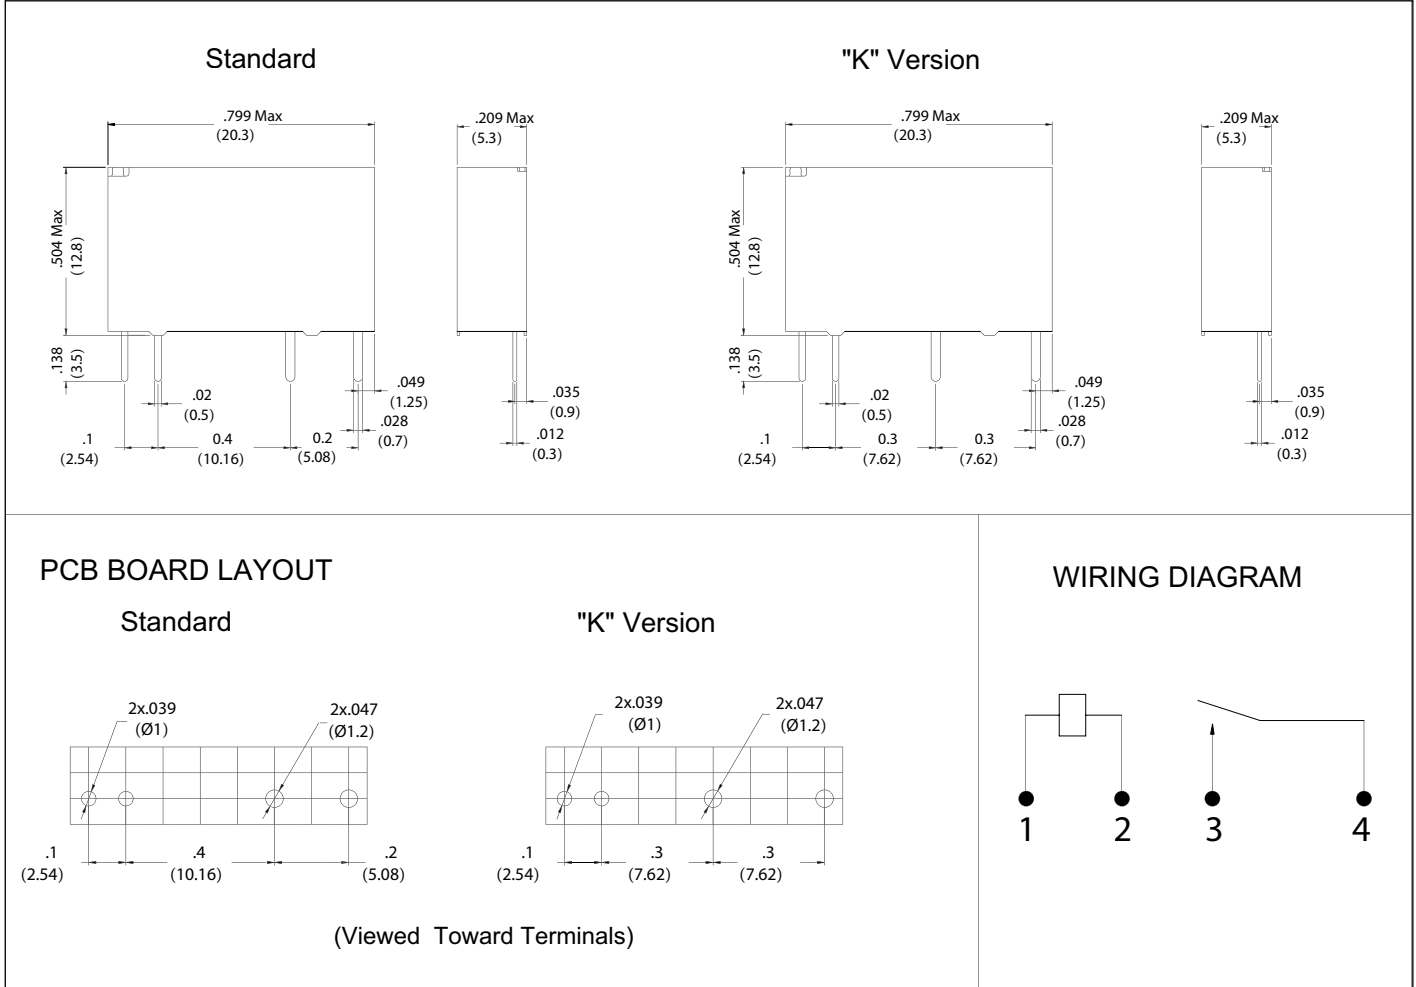

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "