

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	10/12/10	

APPROVED: _____

DATE: _____ TITLE: _____

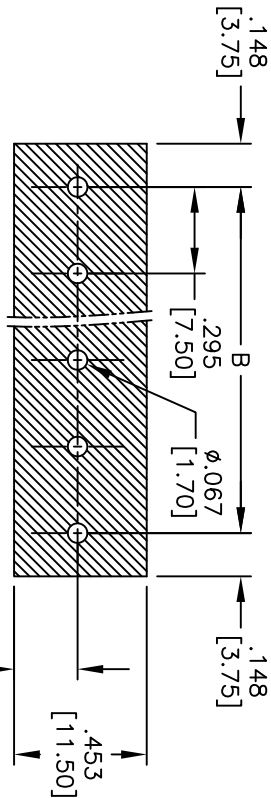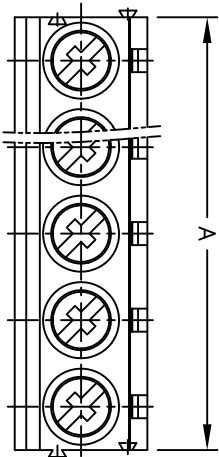

RECOMMENDED PCB LAYOUT [5.50]

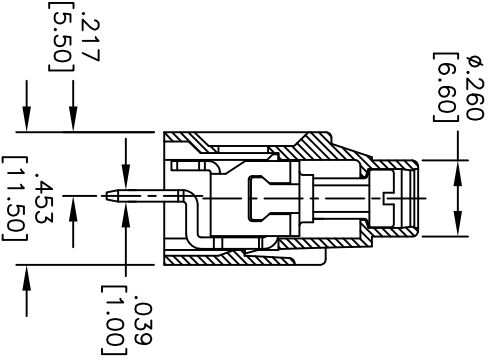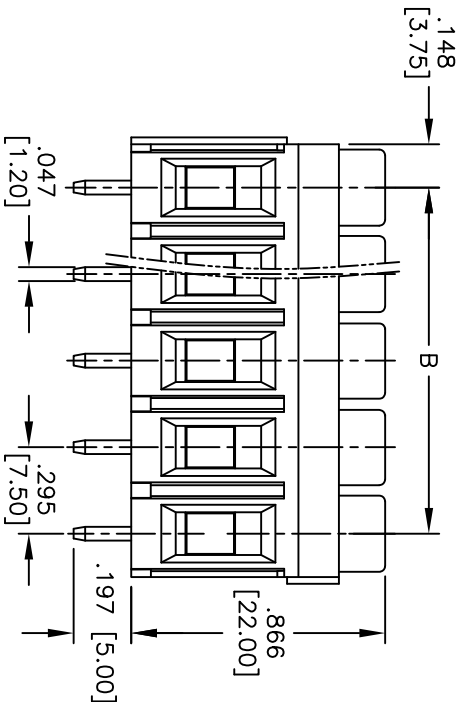

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, rated UL 94V-0

Insulator color: Green

Solder Pin: Copper Alloy, Tin plated

Wire cage: Steel, M3.5/Zn plated.

Screw: Steel, M3.5/Zn plated.

Electrical:

Rating: 600V 5A

300V 30A

Insulation withstands voltage: AC2000V at 1 minute

Insulation resistance: 500 mohms min @ DC500V

Mechanical:

Screw Torque: 14kgf-cm

Solid wire: 24-10 AWG.

Environmental:

Operating temperature: -40°C to +105°C

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

MODULAR EURO BLOCK, VERTICAL,
.295 [7.50] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .015	ØXX	± .010
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	DRY		10/12/10				
CHECKED							
APPROVED							
TITLE				SIZE			
PART NO.				REV.			
EB119-XX-M				-			
REF: S00024T				SCALE: NTS			
SHEET 1 OF 1							