

DATE	REVISIONS	REV
8-9-93	CHG'D LEAD LENGTHS/	A
8-27-93	CHG'D LEAD LENGTHS/	B
8-19-94	CHG'D HOLDER BOTTOM & SAFE OP. SPECS./	C
11-29-94	UPDATED SPECS./	D
2-8-95	CHG'D. HOLDER BOTTOM./	E
10-5-95	REF ECN 10100./	F
2-6-96	REF ECN 10104./	G

DRAWING NUMBER
SSF-LXH240LYGD

REV
G


ELECTRO-OPTICAL CHARACTERISTICS TA=25 °C If=20mA

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		585 (YELLOW)		nm	
		565 (GREEN)		nm	
FORWARD VOLTAGE (Y/G)		2.1	2.8	V _f	
REVERSE VOLTAGE	5.0			V _r	I _r =100uA
AXIAL INTENSITY (Y/G)		15		mcd	I _f =20mA
		1.5		mcd	I _f =2mA
VIEWING ANGLE		80		2x theta	
EMITTED COLOR:		POS. 1 - YELLOW			POS. 2 - GREEN
EPOXY LENS FINISH:		POS. 1 - YELLOW DIFFUSED			
		POS. 2 - GREEN DIFFUSED			

LIMITS OF SAFE OPERATION AT 25 DEG. C

PARAMETER	MAX	UNITS
Ⓓ PEAK FORWARD CURRENT (Y/G)*	150/150	mA
Ⓓ STEADY CURRENT (Y/G)	30/25	mA
Ⓓ POWER DISSIPATION (Y/G)	105/105	mW
DERATE FROM 25 °C	-1.6	mW/°C
Ⓒ OPERATING, STORAGE TEMP.	-40 TO +85	°C
Ⓒ LEAD SOLDERING TEMP.	+260	°C
Ⓒ 2.0mm FROM BODY		3 SEC. MAX

* t<10μs

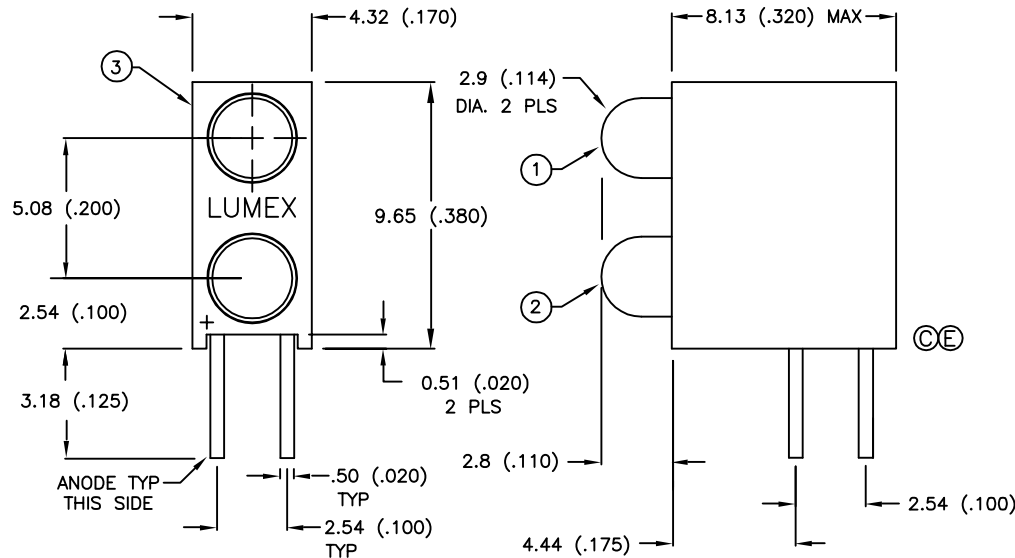

BILL OF MATERIALS:

1. SSL-LX3044LYD LED.
2. SSL-LX3044LGD LED.
3. SSH-LXH240 HOLDER. MATERIAL: BLACK NYLON 94V-0.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
OPTO COMPONENTS INC.

292 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
(708) 359-2790

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX OPTO/COMPONENTS, INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX OPTO/COMPONENTS, INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 1-12-96	DWN:	CHK'D:	APPD:
SCALE: N/A			

T-3mm LED, RIGHT ANGLE FAULT INDICATOR,
YELLOW/GREEN DIFFUSED, SPECIAL LOW CURRENT SELECTION

PAGE 1 OF 1	DRAWING NUMBER SSF-LXH240LYGD	REV G
-------------	----------------------------------	----------