


Toroidal Transformer Data Sheet

625VA Open Style, with Leads. 230V Primary, Dual Secondaries

High quality open style toroidal transformers with a single 230V/50-60Hz primary winding. Twin secondary windings may be connected in series or parallel, or used independently.

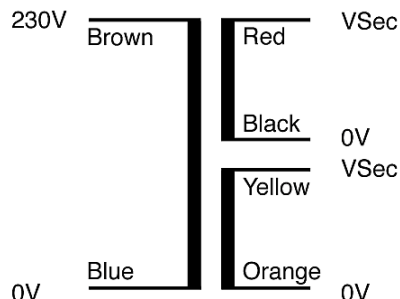

Primary 230V @ 50-60Hz

Secondary: 2 x Vsec @ 312.5VA Each
Suitable for Series/Parallel connection



Nuvotem Part Number	Full Load Vsec [V]	Rated Current per Sec [A]	No Load Vsec [V]	DC Resistance [Ohms] @ 25°C	DEKRA Certificate
0625P1-2-040	2 x 40	7.813	2 x 42.31	2 x 0.1418	2161054.02
0625P1-2-045	2 x 45	6.944	2 x 47.38	2 x 0.1792	2161054.02
0625P1-2-050	2 x 50	6.250	2 x 52.44	2 x 0.1998	2161054.02
0625P1-2-055	2 x 55	5.682	2 x 57.96	2 x 0.2509	2161054.02

Primary Winding

Input Voltage Range : 207V–253V (230V +/- 10%) @ 50/60Hz
DC Resistance @ 25°C = Approx 1.7 Ohms

Losses

Iron Losses 2.95 Watts approx
Copper Losses 39.0 Watts approx

Temperature Class

Winding Wire (Primary & Secondary) Class H (180°C)
Insulation between input and output Class B (130°C)
Connection lead insulation Class A (105°C)

Standards

Approved to UL506 & UL5085 : File E215495
Approved to EN61558 : DEKRA Certificate 2161054.02
Conforms to EN60065, VDE0550, BS415.

Physical Data

Approximate Dimensions Diameter 136mm*
Height 68mm
* Measured away from leadout bulge; Allow extra 4mm at leads.
Approximate Weight 4.30 Kg

Terminations

Primary **Solid copper conductors (extension of winding wire), insulated over their entire length with 105°C PVC tubing. Double-insulated over entire length with 105°C PVC tubing. 150mm Long, 10mm tinned ends.**

Secondary Solid copper conductors (extension of winding wire), insulated over their entire length with 105°C PVC tubing. 150mm Long, 10mm tinned ends.

Mounting Hardware

Each transformer is supplied with a mounting kit, comprising:
Neoprene Insulating disc 2 pieces
Dished Steel Washer 1 piece