

ALTERNATOR DIODE FOR AUTOMOTIVE APPLICATION.

FEATURES


- Average Forward Current : $I_O=65A$.
- Zener Voltage : 21V(Typ.)

POLARITY

- E65A21VBS (+ Type)
- E65A21VBR (- Type)

MAXIMUM RATING ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Average Forward Current	$I_{F(AV)}$	65	A
Peak 1 Cycle Surge Current	I_{FSM}	450 (60Hz)	A
Non-Repetitive Peak Reverse Surge Current (10mS)	I_{RSM}	65	A
Transient Peak Reverse Voltage	V_{RSM}	16	V
Peak Reverse Voltage	V_{RM}	16	V
Junction Temperature	T_j	-40 ~ 215	$^\circ C$
Storage Temperature Range	T_{stg}	-40 ~ 215	$^\circ C$

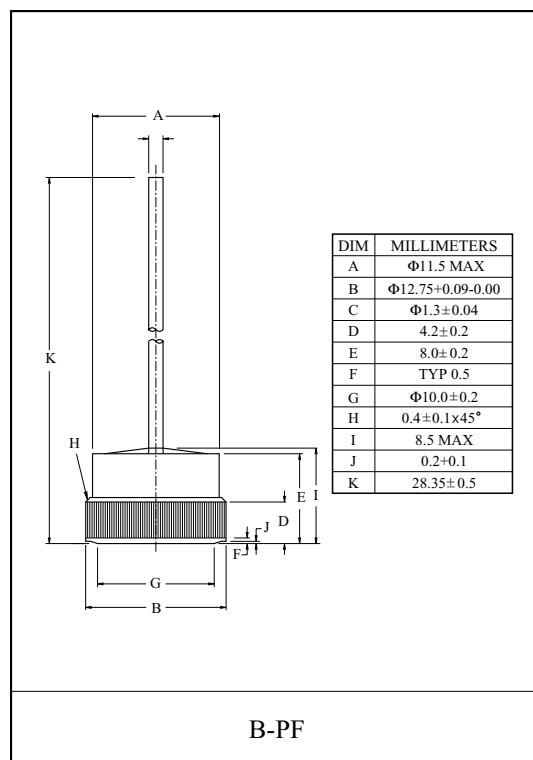

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	V_F	$I_{FM}=100A$	-	-	1.05	V
Zener Voltage	V_Z	$I_Z=10mA$	19	21	23	V
Reverse Current	I_R	$V_R=20V$	-	-	0.3	μA
Transient Thermal Resistance	ΔV_F	$I_{FM}=100A, I_M=100mA, P_w=100mS$	-	-	50	mV
Breakdown Voltage	V_{br}	$I_{RSM}=65A, P_w=10mS$	-	-	34	V
Reverse Leakage Current Under High Temperature	HI_R	$T_a=150^\circ C, V_R=20V$	-	-	100	μA
Temperature Resistance	R_{th}	DC total junction to case	-	-	0.5	$^\circ C/W$