

SWITCHMODE SERIES NPN POWER TRANSISTORS

... designed for use in high-voltage, high-speed, power switching applications such as switching regulator's, inverters, and converter.

FEATURES:

*Collector-Emitter Sustaining Voltage-

$$V_{CE(sus)} = 800 \text{ V (Min)}$$

* Collector-Emitter Saturation Voltage -

$$V_{CE(sat)} = 2.0 \text{ V (Max.) @ } I_C = 3.0 \text{ A, } I_B = 0.6 \text{ A}$$


* Switching Time - $t_f = 0.7 \text{ us (Max.) @ } I_C = 4.0 \text{ A}$

NPN
2SC3153


6 AMPERE
SILICON POWER
TRANSISTORS
800 VOLTS
100 WATTS

MAXIMUM RATINGS

Characteristic	Symbol	2SC3153	Unit
Collector-Emitter Voltage	V_{CEO}	800	V
Collector-Base Voltage	V_{CBO}	900	V
Emitter-Base Voltage	V_{EBO}	7.0	V
Collector Current - Continuous - Peak	I_C I_{CM}	6.0 20	A
Base current	I_B	3.0	A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	100 0.8	W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$



TO-247(3P)




PIN 1.BASE
2.COLLECTOR
3.EMITTER

DIM	MILLIMETERS	
	MIN	MAX
A	20.63	22.38
B	15.38	16.20
C	1.90	2.70
D	5.10	6.10
E	14.81	15.22
F	11.72	12.84
G	4.20	4.50
H	1.82	2.46
I	2.92	3.23
J	0.89	1.53
K	5.26	5.66
L	18.50	21.50
M	4.68	5.36
N	2.40	2.80
O	3.25	3.65
P	0.55	0.70

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.25	$^\circ\text{C/W}$

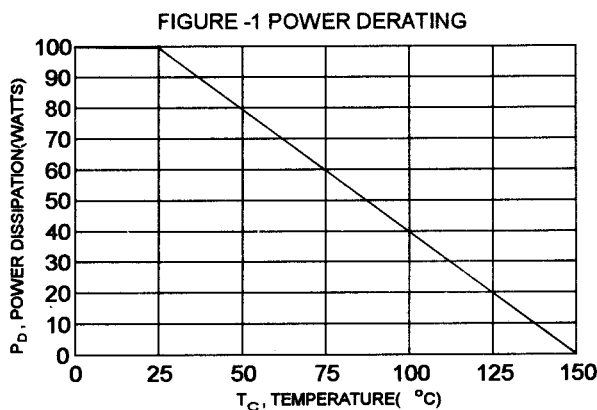

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage ($I_C = 6.0\text{ A}$, $I_B = 2.0\text{ A}$, $L = 200\text{ }\mu\text{H}$)	$V_{\text{CEO(SUS)}}$	800		V
Collector-Emitter Breakdown Voltage ($I_C = 5.0\text{ mA}$, $I_B = 0$)	$V_{\text{(BR)CEO}}$	800		V
Collector-Base Breakdown Voltage ($I_C = 1.0\text{ mA}$, $I_E = 0$)	$V_{\text{(BR)CBO}}$	900		V
Emitter-Base Breakdown Voltage ($I_C = 1.0\text{ mA}$, $I_C = 0$)	$V_{\text{(BR)EBO}}$	7.0		V
Collector Cutoff Current ($V_{\text{CB}} = 800\text{ V}$, $I_E = 0$)	I_{CBO}		10	μA
Emitter Cutoff Current ($V_{\text{EB}} = 5.0\text{ V}$, $I_C = 0$)	I_{EBO}		10	μA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 0.4\text{ A}$, $V_{\text{CE}} = 5.0\text{ V}$) * ($I_C = 2.0\text{ A}$, $V_{\text{CE}} = 5.0\text{ V}$)	$h_{\text{FE(2)}}$ h_{FE}	10 8.0	40	
Collector-Emitter Saturation Voltage ($I_C = 3.0\text{ A}$, $I_B = 600\text{ mA}$)	$V_{\text{CE(sat)}}$		2.0	V
Base-Emitter Saturation Voltage ($I_C = 3.0\text{ A}$, $I_B = 600\text{ mA}$)	$V_{\text{BE(sat)}}$		1.5	V

DYNAMIC CHARACTERISTICS

Current-Gain-Bandwidth Product ($I_C = 0.4\text{ A}$, $V_{\text{CE}} = 10\text{ V}$, $f = 1.0\text{ MHz}$)	f_T	7.0		MHz
---	-------	-----	--	-----


SWITCHING CHARACTERISTICS

On Time	$V_{\text{CC}} = 400\text{ V}$, $I_C = 4.0\text{ A}$ $I_{\text{B1}} = 0.8\text{ A}$, $I_{\text{B2}} = -1.6\text{ A}$ $R_L = 100\text{ }\Omega$	t_{on}	1.0	μs
Storage Time		t_s	3.0	μs
Fall Time		t_f	0.7	μs


(1) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$ * $h_{\text{FE(2)}}$ Classification:

10	K	20	15	L	30	20	M	40
----	---	----	----	---	----	----	---	----


SAFE OPERATING AREA

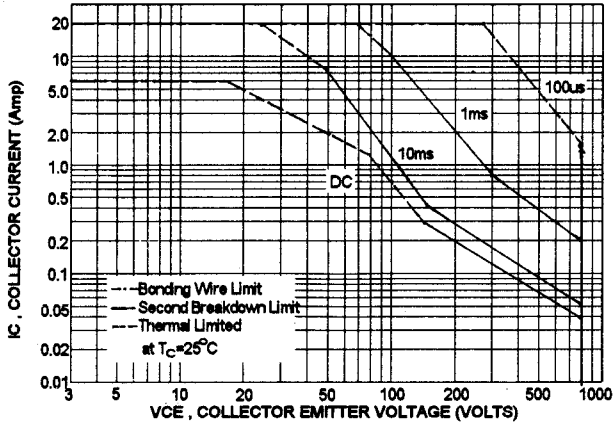


$I_C - V_{BE}$

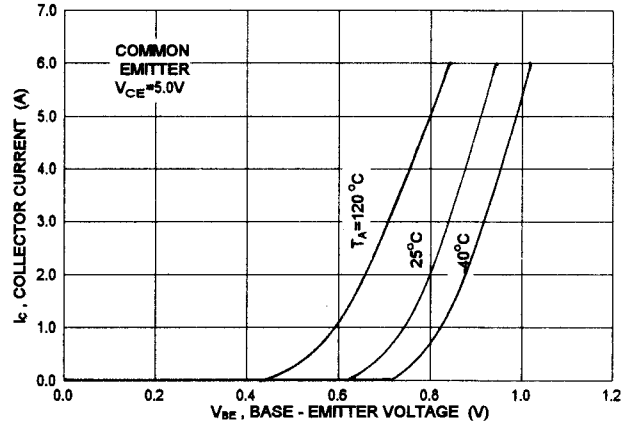


DC CURRENT GAIN

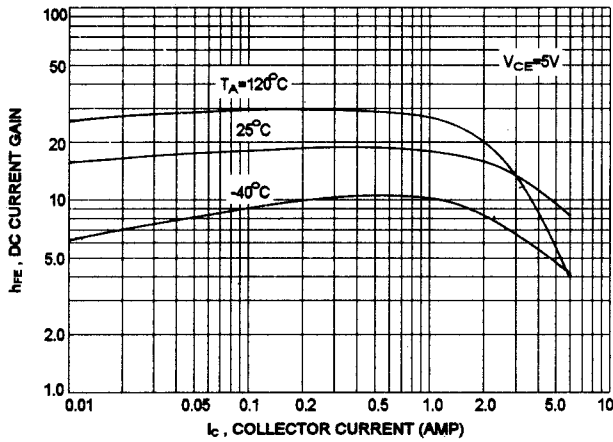

$I_C - V_{CE}$

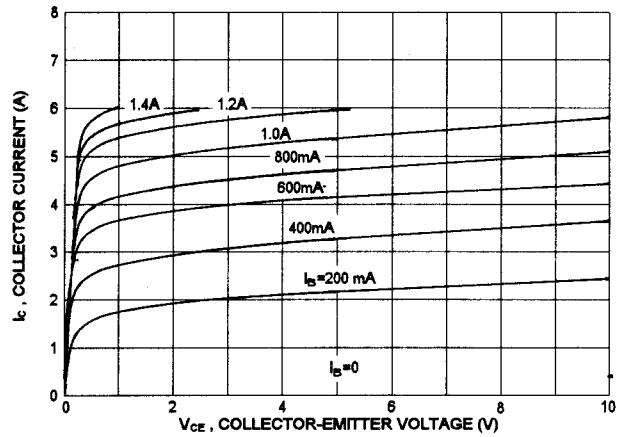

SWITCHING TIME

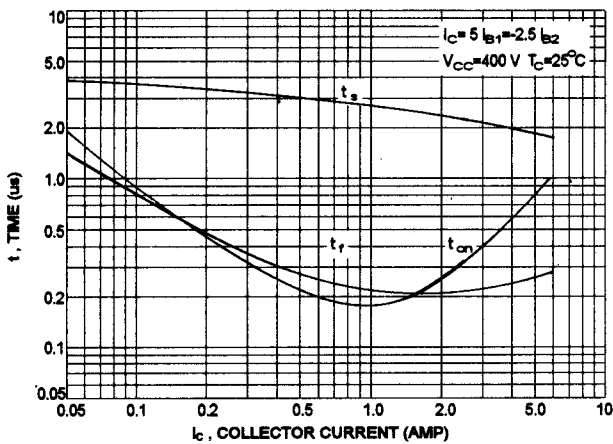

"ON" VOLTAGES

