


60 Amp Ultrafast Recovery Rectifier UF5010 — UF5020

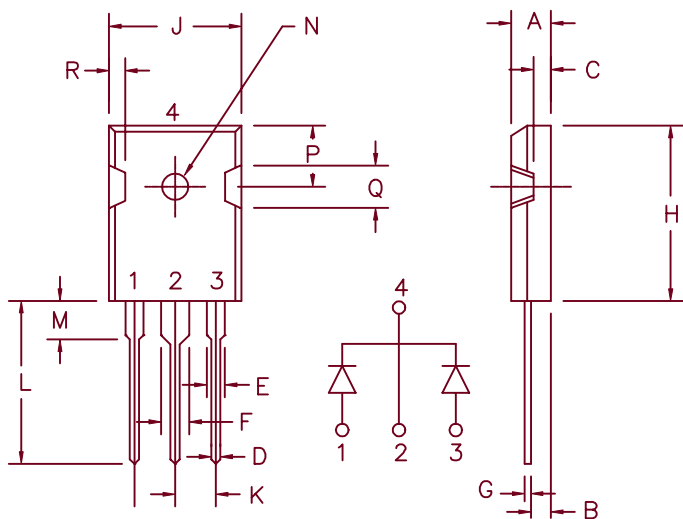

Similar to TO-247AD

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.185	.209	4.70	5.31	
B	.087	.102	2.21	2.59	
C	.059	.098	1.50	2.49	
D	.040	.055	1.02	1.40	
E	.079	.094	2.01	2.39	
F	.118	.133	3.00	3.38	
G	.016	.031	.410	0.78	
H	.819	.883	20.80	22.4	
J	.627	.650	15.93	16.5	
K	.215	—	5.46	—	Typ.
L	.790	.810	20.07	20.6	
M	.157	.180	3.99	4.57	
N	.139	.144	3.53	3.66	Dia.
P	.255	.300	6.48	7.62	
Q	.170	.210	4.32	5.33	
R	.080	.110	2.03	2.79	

Microsemi Catalog
Number

UF5010
UF5015
UF5020

Repetitive Peak
Reverse Voltage

100V
150V
200V

Transient Peak
Reverse Voltage

100V
150V
200V

- Ultra Fast Recovery
- VRRM 100–200 Volts
- High surge capacity
- 175°C junction temperature
- 2 X 30 Amp current rating
- t_{rr} 35nS maximum

Electrical Characteristics

Average Forward Current per pkg.
Average Forward Current per leg
Maximum Surge Current per leg
Max. Peak Forward Voltage per leg
Max. Peak Reverse Current per leg
Max. Reverse Recovery time per leg
Typical Junction Capacitance per leg

$I_{F(AV)}$ 60 Amps
 $I_{F(AV)}$ 30 Amps
 I_{FSM} 250 Amps
 V_{FM} .975 Volts
 I_{RM} 15 μ A
 t_{rr} 35 nS
 C_J 205 pF

$T_C = 115^\circ\text{C}$, Square wave, $R_{\theta JC} = 1.0^\circ\text{C/W}$
 $T_C = 115^\circ\text{C}$, Square wave, $R_{\theta JC} = 2.0^\circ\text{C/W}$
8.3ms, half sine, $T_J = 175^\circ\text{C}$
 $I_{FM} = 30\text{A}$, $T_J = 25^\circ\text{C}$
 V_{RRM} , $T_J = 25^\circ\text{C}$
1/2A, 1A, 1/4A, $T_J = 25^\circ\text{C}$
 $T_J = 25^\circ\text{C}$, $V_R = 10\text{V}$

*Pulse test: Pulse width 300 usec. Duty Cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operating junction temp range
Max thermal resistance per pkg.
Max thermal resistance per leg
Mounting torque
Weight

TSTG
 T_J
 $R_{\theta JC}$
 $R_{\theta JC}$

-55°C to $+175^\circ\text{C}$
 -55°C to $+175^\circ\text{C}$
 1.0°C/W junction to case
 2.0°C/W junction to case
8–10 inch pounds (#6 screw)
.22 ounces (6.2 grams) typical

UF5010 — UF5020

Figure 1
Typical Forward Characteristics — Per Leg

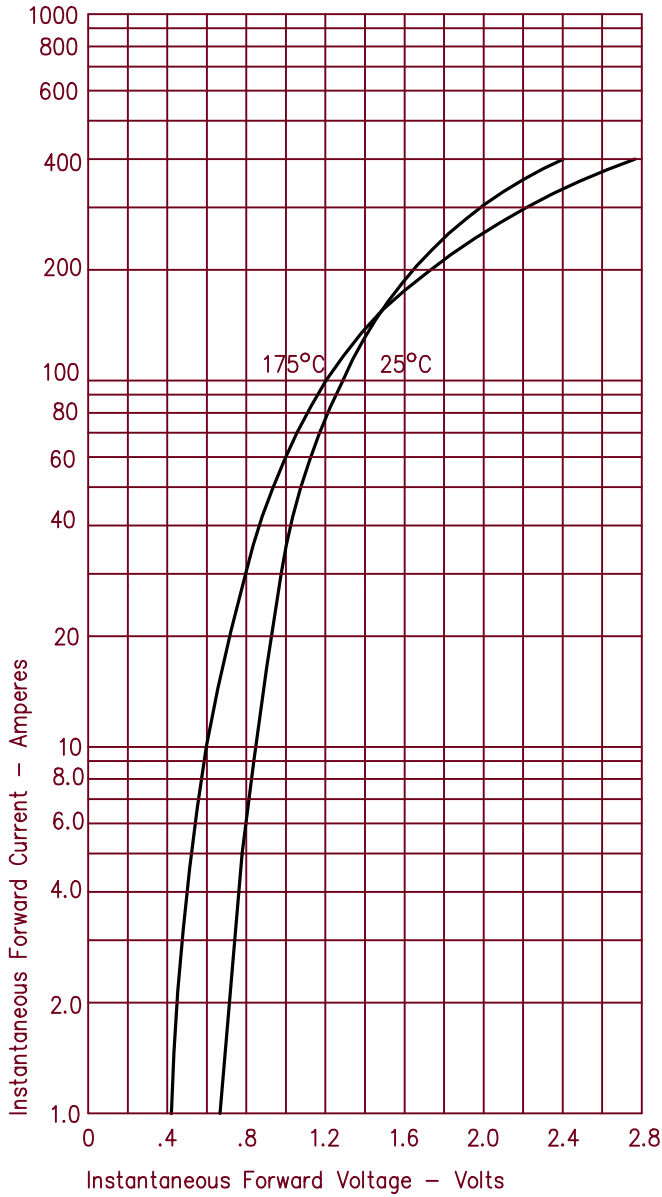


Figure 2
Typical Reverse Characteristics — Per Leg

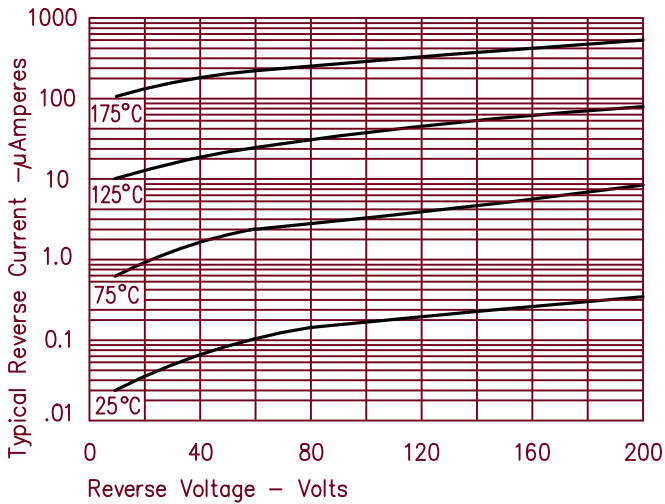


Figure 3
Typical Junction Capacitance — Per Leg

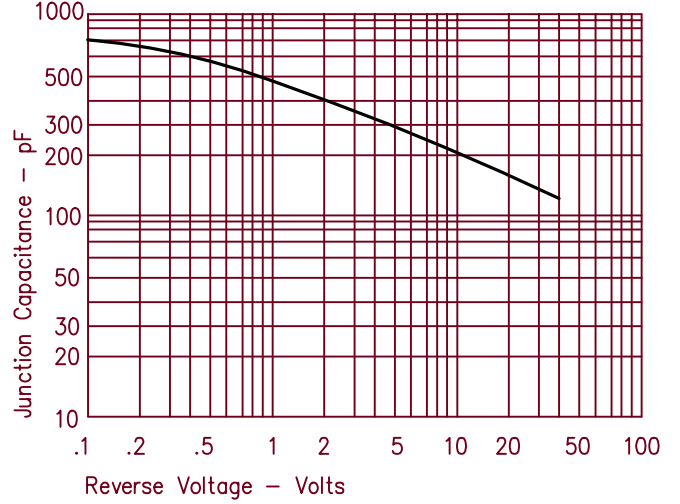


Figure 4
Forward Current Derating — Per Leg

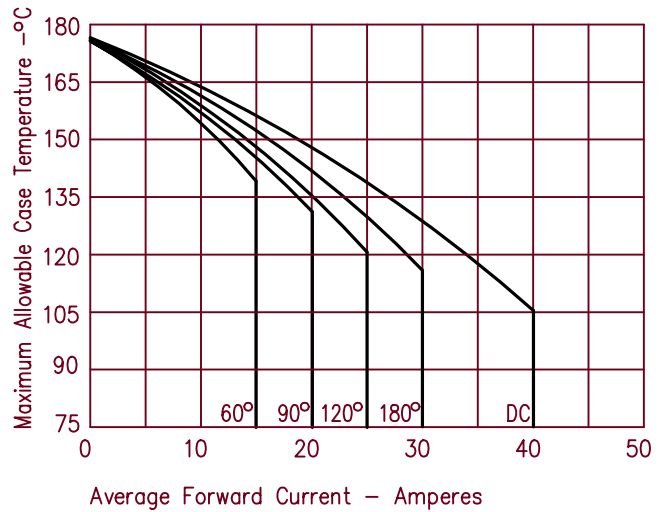


Figure 5
Maximum Forward Power Dissipation — Per Leg

