

PNP SILICON POWER TRANSISTORS

D45H2A transistor is designed for use in general purpose Power amplifier, regulator switching circuits application

FEATURES:


- * Collector-Emitter Voltage
 $V_{CEO} = 30V(\text{Min})$
- * High Current Power Transistors
- * DC Current Gain
 $hFE = 70(\text{Min.}) @ I_C = 8.0A$

MAXIMUM RATINGS

Characteristic	Symbol	D45H2A	Unit
Collector-Emitter Voltage	V_{CEO}	30	V
Collector-Base Voltage	V_{CBO}	30	V
Emitter-Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous - Peak	I_C I_{CM}	10 20	A
Total Power Dissipation @ $T_C = 25^\circ C$ Derate above $25^\circ C$	P_D	60 0.48	W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ C$


THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	2.08	$^\circ C/W$

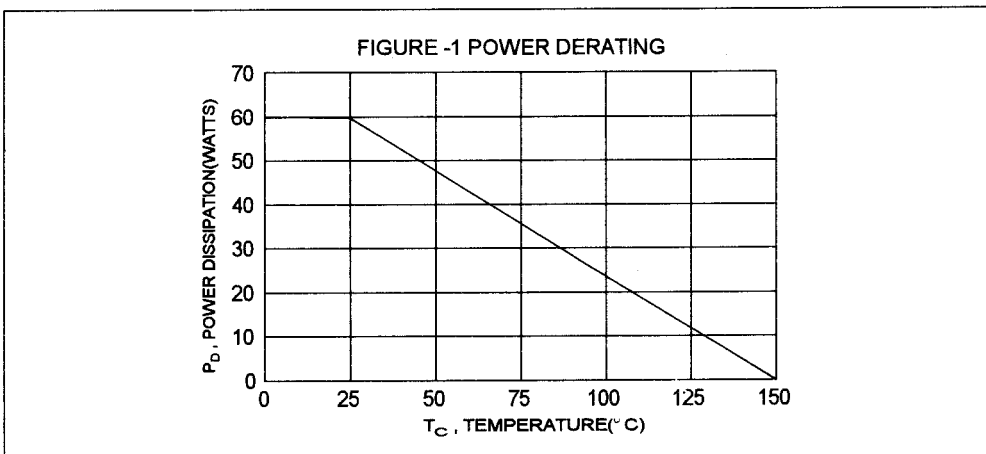


PNP D45H2A

10 AMPERE
POWER
TRANSISTORS
30 VOLTS
60 WATTS



TO-220



- PIN 1.BASE
- 2.COLLECTOR
- 3.EMITTER
- 4.COLLECTOR(CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.31
B	9.78	10.42
C	5.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Voltage ($I_c = 30\text{ mA}$, $I_B = 0$)	V_{CE0}	30		V
Collector Cutoff Current ($V_{CB} = 30\text{ V}$, $I_E = 0$)	I_{CBO}		10	μA
Emitter Cutoff Current ($V_{EB} = 5.0\text{ V}$, $I_C = 0$)	I_{EBO}		100	μA

ON CHARACTERISTICS (1)

DC Current Gain ($I_c = 8.0\text{ A}$, $V_{CE} = 1.0\text{ V}$)	hFE	70		
Collector-Emitter Saturation Voltage ($I_c = 8.0\text{ A}$, $I_B = 400\text{ mA}$)	$V_{CE(sat)}$		0.6	V
Base-Emitter Saturation Voltage ($I_c = 8.0\text{ A}$, $I_B = 400\text{ mA}$)	$V_{BE(sat)}$		1.5	V

(1) Pulse Test: Pulse Width = $300\mu\text{ s}$, Duty Cycle $\leq 2.0\%$:

FIG-2 DC CURRENT GAIN

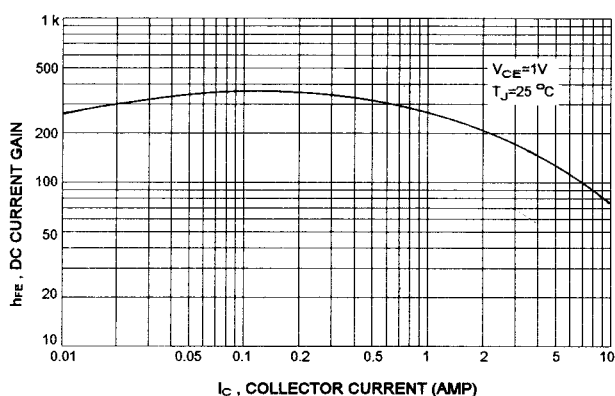


FIG-3 COLLECTOR SATURATION REGION


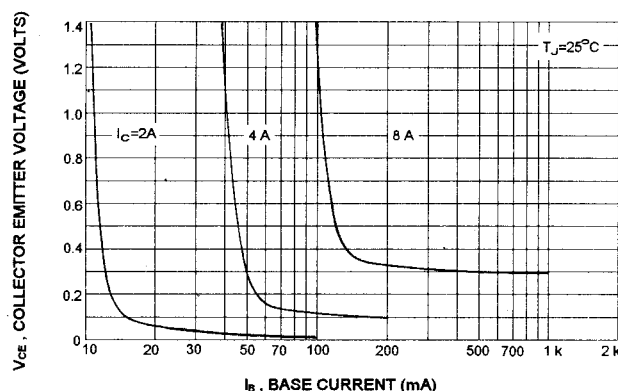


FIG-4 SAFE OPERATING AREA

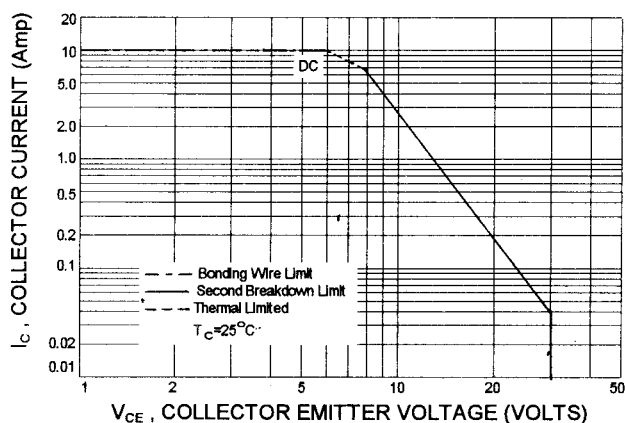

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_c - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of FIG-4 is base on $T_{J(PK)} = 150^\circ\text{C}$; T_c is variable depending on power level. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)} < 150^\circ\text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to Values less than the limitations imposed by second breakdown.