

## 3 WATT REGULATED WIDE INPUT RANGE DC/DC CONVERTER

### WPC03R



#### FEATURES

- 1 Low Cost, High Performance
- 1 Small DIP Package
- 1 Full Power to +85°C
- 1 Extended Temperature Range: -40°C to +85°C
- 1 Industry Standard Pinouts
- 1 Full Short Circuit Protection
- 1 High Capacitive Loading Capability
- 1 Protected Against High Input Voltage

#### APPLICATIONS

- 1 Telecommunications
- 1 Battery Powered Systems
- 1 Portable Instruments
- 1 Transportation Equipment
- 1 Distributed Power Systems


#### DESCRIPTION

The WPC03R is a family of high performance DC/DC converters that offers regulated outputs over input voltage ranges of 9-18V, 18-36V and 34-72V while offering a wide operating temperature range of -40°C to +85°C without derating.

Each WPC03R contains input filtering to minimize conducted noise. The design utilizes surface mounted components, including magnetics, to provide enhanced reliability.

The converter is designed to meet the requirements of EN60950 with the "L" pinout having 1,500 VDC isolation. All WPC03R converters are designed to withstand input voltage transients to 200% of nominal input voltage. An additional feature is the ability of the WPC03R to drive high capacitive loads.

#### SIMPLIFIED CIRCUIT SCHEMATIC

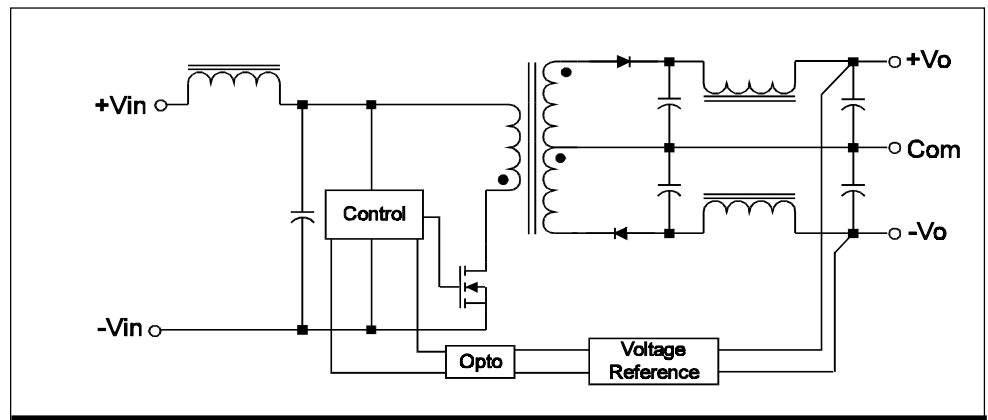

Internet: <http://www.cdpowerelectronics.com>

Power Electronics Division, United States  
3400 E Britannia Drive, Tucson, Arizona 85706  
Phone: 800.547.2537 Fax: 520.770.9369

Power Electronics Division, Europe  
C&D Technologies (Power Electronics) Ltd.  
132 Shannon Industrial Estate, Shannon, Co. Clare, Ireland  
Tel: +353.61.474.133 Fax: +353.61.474.141

## ABSOLUTE MAXIMUM RATINGS

|                                       |            |
|---------------------------------------|------------|
| Output Short Circuit Protection ----- | Continuous |
| Internal Power Dissipation -----      | 1.5W       |
| Lead Temp (soldering, 10s Max) -----  | +300°C     |
| Max Case Temperature -----            | +100°C     |

## ELECTRICAL SPECIFICATIONS

Specifications typical at  $T_A = 25^\circ\text{C}$ , nominal input voltage, rated output current unless otherwise stated.

| Model       | Nominal Input Voltage (Volts) | Rated Output Voltage (Volts) | Output Current (mA)   |            | Max Input Current (mA)<br>Rated Load | Max Capacitive Load ( $\mu\text{F}$ ) | Efficiency % |
|-------------|-------------------------------|------------------------------|-----------------------|------------|--------------------------------------|---------------------------------------|--------------|
|             |                               |                              | Min Load (See Note 1) | Rated Load |                                      |                                       |              |
| WPC03R12S05 | 12                            | 5.0                          | 60                    | 600        | 448                                  | 600                                   | 77           |
| WPC03R12S12 | 12                            | 12.0                         | 24                    | 250        | 445                                  | 250                                   | 80           |
| WPC03R12S15 | 12                            | 15.0                         | 20                    | 200        | 445                                  | 200                                   | 81           |
| WPC03R12D05 | 12                            | $\pm 5.0$                    | $\pm 30$              | $\pm 300$  | 470                                  | $\pm 300$                             | 74           |
| WPC03R12D12 | 12                            | $\pm 12.0$                   | $\pm 12$              | $\pm 125$  | 475                                  | $\pm 125$                             | 76           |
| WPC03R12D15 | 12                            | $\pm 15.0$                   | $\pm 10$              | $\pm 100$  | 475                                  | $\pm 100$                             | 77           |
| WPC03R24S05 | 24                            | 5.0                          | 60                    | 600        | 230                                  | 600                                   | 74           |
| WPC03R24S12 | 24                            | 12.0                         | 24                    | 250        | 230                                  | 250                                   | 75           |
| WPC03R24S15 | 24                            | 15.0                         | 20                    | 200        | 225                                  | 200                                   | 76           |
| WPC03R24D05 | 24                            | $\pm 5.0$                    | $\pm 30$              | $\pm 300$  | 240                                  | $\pm 300$                             | 73           |
| WPC03R24D12 | 24                            | $\pm 12.0$                   | $\pm 12$              | $\pm 125$  | 235                                  | $\pm 125$                             | 74           |
| WPC03R24D15 | 24                            | $\pm 15.0$                   | $\pm 10$              | $\pm 100$  | 230                                  | $\pm 100$                             | 75           |
| WPC03R48S05 | 48                            | 5.0                          | 60                    | 600        | 120                                  | 600                                   | 74           |
| WPC03R48S12 | 48                            | 12.0                         | 24                    | 250        | 118                                  | 250                                   | 75           |
| WPC03R48S15 | 48                            | 15.0                         | 20                    | 200        | 116                                  | 200                                   | 76           |
| WPC03R48D05 | 48                            | $\pm 5.0$                    | $\pm 30$              | $\pm 300$  | 120                                  | $\pm 300$                             | 75           |
| WPC03R48D12 | 48                            | $\pm 12.0$                   | $\pm 12$              | $\pm 125$  | 118                                  | $\pm 125$                             | 76           |
| WPC03R48D15 | 48                            | $\pm 15.0$                   | $\pm 10$              | $\pm 100$  | 116                                  | $\pm 100$                             | 77           |

**NOTE 1:** Although minimum load specifications are indicated for load measurement purposes, all models will operate under no-load conditions.

## ORDERING INFORMATION

|   |
|---|
| <b>WPC03R xxyzz E</b>                             |
| Device Family _____                               |
| Indicates wide input power 3W regulated DC/DC     |
| Model Number _____                                |
| Selected from Table of Electrical Characteristics |
| xx=input voltage                                  |
| y=number of outputs: S=single, D=dual             |
| zz=output voltage                                 |
| Pinout option E or L _____                        |

## COMMON SPECIFICATIONS



Specifications typical at  $T_A=25^{\circ}\text{C}$ , nominal input voltage, rated output current unless otherwise stated.

| Parameter                    | Conditions   | Min  | Typ        | Max         | Units                 |
|------------------------------|--|------|------------|-------------|-----------------------|
| Input                        |  |      |            |             |                       |
| Voltage Range                |  | 9    | 12         | 18          | Vdc                   |
|                              |  | 18   | 24         | 36          | Vdc                   |
|                              |  | 34   | 48         | 72          | Vdc                   |
| Reflected Ripple Current     |  |      | 50         |             | mA p-p                |
| Isolation                    |  |      |            |             |                       |
| Safety Standards             | Designed to meet requirements of EN60950, EN41003 & UL1950 |      |            |             |                       |
| Rated Voltage                | "L" Pinout   | 1500 |            |             | Vdc                   |
|                              | "E" Pinout   | 1000 |            |             | Vdc                   |
| Test Voltage—60 Hz, 10 secs  | "L" Pinout   | 1500 |            |             | Vpk                   |
|                              | "E" Pinout   | 1000 |            |             | Vpk                   |
| Resistance                   |  |      | 10         |             | $\text{G}\Omega$      |
| Capacitance                  |  |      | 220        |             | pF                    |
| Leakage Current              | $V_{\text{iso}}=240\text{Vac}$ , 60 Hz                     |      | 30         |             | $\mu\text{Arms}$      |
| Output                       |  |      |            |             |                       |
| Rated Power                  |  |      |            | 3           | W                     |
| Voltage Setpoint Accuracy    |  |      |            | $\pm 3.0$   | %                     |
| Temperature Coefficient      |  |      | $\pm 0.02$ |             | %/ $^{\circ}\text{C}$ |
| Line Regulation-singles      | Low line to high line                                      |      |            | $\pm 1.5\%$ | %                     |
| Line Regulation-duals        | Low line to high line                                      |      |            | $\pm 1.5\%$ | %                     |
| Load Regulation-singles      | Min load to rated load                                     |      |            | $\pm 2\%$   | %                     |
| Load Regulation-duals        | Min load to rated load                                     |      |            | $\pm 2\%$   | %                     |
| Ripple & Noise               | BW=5 Hz to 20 MHz  |      | 50         | 100         | mV p-p                |
| General                      |  |      |            |             |                       |
| MTTF per MIL-HDBK-217, Rev F | $T_A=25^{\circ}$   |      | 1,000,000  |             | Hours                 |
| Temperature                  |  |      |            |             |                       |
| Operation                    |  | -40  |            | +85         | $^{\circ}\text{C}$    |
| Storage                      |  | -55  |            | +125        | $^{\circ}\text{C}$    |

# MECHANICAL SPECIFICATIONS

## PINOUT “E”

| Pin Number | Pin Function  |        |
|------------|---------------|--------|
|            | Singles       | Duals  |
| 1          | +Vin          | +Vin   |
| 2          | No connection | -Vout  |
| 3          | No connection | Common |
| 10         | -Vout         | Common |
| 11         | +Vout         | +Vout  |
| 12         | -Vin          | -Vin   |
| 13         | -Vin          | -Vin   |
| 14         | +Vout         | +Vout  |
| 15         | -Vout         | Common |
| 22         | No connection | Common |
| 23         | No connection | -Vout  |
| 24         | +Vin          | +Vin   |

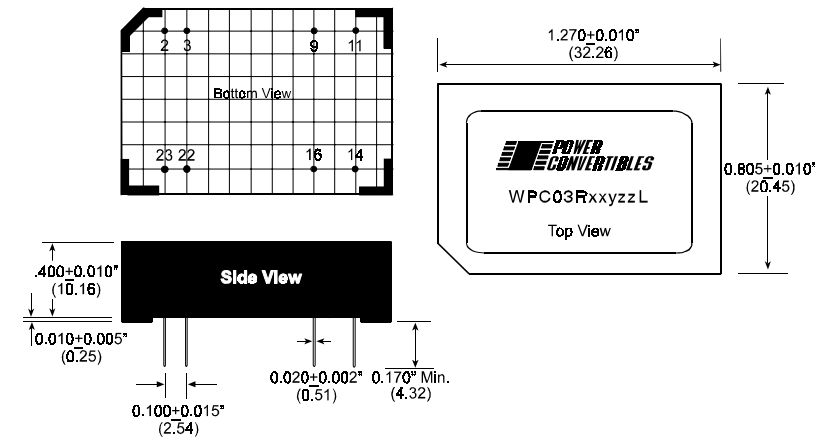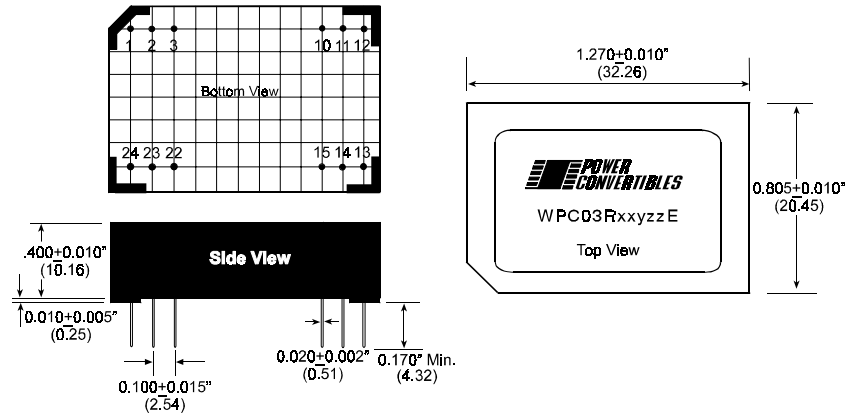

## PINOUT “L”

| Pin Number | Pin Function  |        |
|------------|---------------|--------|
|            | Singles       | Duals  |
| 2          | -Vin          | -Vin   |
| 3          | -Vin          | -Vin   |
| 9          | No connection | Common |
| 11         | No connection | -Vout  |
| 14         | +Vout         | +Vout  |
| 16         | -Vout         | Common |
| 22         | +Vin          | +Vin   |
| 23         | +Vin          | +Vin   |

## TECHNICAL INFORMATION

### Notes:

1. All dimensions in inches and (millimeters).
2. Units are encapsulated with a low thermal resistance molding compound which has excellent chemical resistance, wide operating temperature range and good electrical properties under high humidity environments. The encapsulant and outer shell have UL94V-0 ratings. Lead material is brass with a solder plated surface to allow ease of solderability.
3. GRID: 0.100 inches, (2.54 mm).
4. Pin Placement Tolerance:  $\pm 0.015"$ , ( $\pm .381$  mm).

The information provided herein is believed to be reliable; however, C&D TECHNOLOGIES assumes no responsibility for inaccuracies or omissions. C&D TECHNOLOGIES assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. C&D TECHNOLOGIES does not authorize or warrant any C&D TECHNOLOGIES product for use in life support devices/systems or in aircraft control applications.