

4855452 INTERNATIONAL RECTIFIER

55C 05083 D

Data Sheet No. PD-2.068A

T-23-07

INTERNATIONAL RECTIFIER **IR**

28CPQ SERIES

28 Amp Dual Schottky Center Tap Rectifiers

Major Ratings and Characteristics

Characteristics	28CPQ030 28CPQ040	28CPQ050 28CPQ060	Units
I _O Rectangular Waveform	28	28	A
	Sinusoidal Waveform	25	
I _{FSM}	@ 50 Hz	380	A
	@ 60 Hz	400	
i ² _t	@ 50 Hz	730	A ² s
	@ 60 Hz	665	
i ² √t	10,300	6,600	A ² √s
V _{RRM}	30 & 40	50 & 60	V
C _t @ -5V	950	800	pF
T _J	-40 to 125	-40 to 125	°C

Description/Features

Description



A dual Schottky rectifier in the TO-218 (plastic TO-3) package. It is rated at 28 amp continuous output current and up to 60 Volts. The 28CPQ is ideally suited for 100 watt switching power supplies, where a light weight, compact, center tap rectifier is required.

Features

- 28 Amp Continuous Output Current
- Low Voltage Drop
- Low Reverse Leakage
- Compact Package



CASE STYLE AND DIMENSIONS

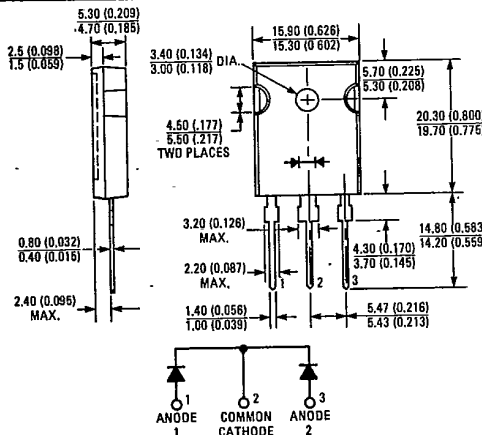

IR Case Style D-48 (Conforms to JEDEC Outline TO-247AA)
Dimensions in Millimeters and (Inches)

28CPQ Series

INTERNATIONAL RECTIFIER **IR**

4855452 INTERNATIONAL RECTIFIER

55C 05084 D

VOLTAGE RATINGS PER JUNCTION

Part Numbers	VRRM - Max. Repetitive Peak Reverse Voltage (V) ①	VRSM - Max. Non-Repetitive Peak Reverse Voltage (V) ②	VR - Max. Direct Reverse Voltage (V) ③
28CPQ030	30	35	30
28CPQ040	40	45	40
28CPQ050	50	55	50
28CPQ060	60	65	60

ELECTRICAL SPECIFICATIONS

T-23-07

	28CPQ030 28CPQ040	28CPQ050 28CPQ060	Units	Conditions
IO Max. average output current from center tap circuit	28	28	A	180° conduction, rectangular waveform. 28CPQ030 & 040 @ TC = -40 to 90°C. 28CPQ050 & 060 @ TC = -40 to 81°C.
	25	25		180° conduction, sinusoidal waveform. 28CPQ030 & 040 @ TC = -40 to 97°C. 28CPQ050 & 060 @ TC = -40 to 91°C.
IFSM Max. peak one cycle, non-repetitive surge current, per junction	380	300	A	50 Hz half cycle sine wave or 6 ms rectangular pulse Following any rated load condition and with rated VRRM applied following surge.
	400	320		60 Hz half cycle sine wave or 5 ms rectangular pulse
	455	360		50 Hz half cycle sine wave or 6 ms rectangular pulse Following any rated load condition and with VRRM = 0 following surge.
	475	380		60 Hz half cycle sine wave or 5 ms rectangular pulse
I²t Max. I ² t for fusing, per junction	730	465	A ² s	t = 10 ms With rated VRRM applied following surge, initial TJ = 125°C.
	665	425		t = 8.3 ms
Max. I ² t for individual junction fusing, per junction	1030	660		t = 10 ms With VRRM = 0 following surge, initial TJ = 125°C.
	940	600		t = 8.3 ms
I²√t Max. I ² √t for individual junction fusing, per junction ④	10,300	6,600	A ² √s	With VRRM = 0 following surge, initial TJ = 125°C. t = 0.1 to 10 ms.
VFM Max. peak forward voltage, per junction	0.54	0.64	V	TJ = 25°C 1/2 rated IF(AV) (14A peak) 180° conduction rectangular waveform
	0.68	0.85		TJ = 25°C Rated IF(AV) (28A peak)
	0.61	0.74		TJ = 125°C
IRM Max. peak reverse current, per junction	15	15	mA	TJ = 25°C
	100	100		TJ = 125°C VRM = rated VRRM
Ct Max. capacitance, per junction	950	800	pF	TC = 25°C, VR = 5 Vdc (Test signal in the range of 100 kHz to 1 MHz).
dv/dt Max. rate of application of reverse voltage, per junction	1000	1000	V/μs	TC = 25°C, VRM = rated VRRM.

THERMAL-MECHANICAL SPECIFICATIONS

TJ Max. operating junction temperature range	-40 to 125	°C	
Tstg Max. storage temperature range	-40 to 125	°C	
RthJC Max. thermal resistance, junction-to-case, DC operation	2.4	deg. C/W	Based on power dissipated in one junction, both junctions operating.
Max. composite thermal resistance, junction-to-case, DC operation	1.2		Based on power dissipated in both junctions.
wt Approximate weight	6.0 (0.21)	g (oz.)	
Case style	D-48		Similar to JEDEC outline TO-218AB ("TO-3P") Terminals 1 and 3: Anodes 1 and 2 Terminals 2 and Tab: Common Cathodes

① 180° conduction, rectangular waveform: 28CPQ030 & 040: TC = -40 to 119°C
28CPQ050 & 060: TC = -40 to 116°C

② 180° conduction, rectangular waveform: 28CPQ030 & 040: TC = 0 to 119°C
28CPQ050 & 060: TC = 0 to 116°C

③ 28CPQ030 & 040: TC = -40 to 115°C
28CPQ050 & 060: TC = -40 to 110°C

④ I²t for time tx = I²√t • √tx.

4855452 INTERNATIONAL RECTIFIER
IR INTERNATIONAL RECTIFIER

55C 05085 D
 28CPQ Series

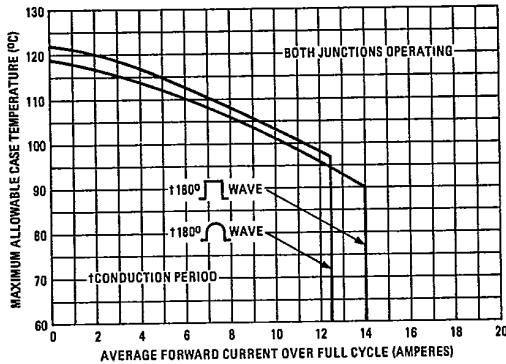


Fig. 1 - Average Forward Current Vs. Maximum Allowable Case Temperature, Per Junction, 28CPQ030 & 40

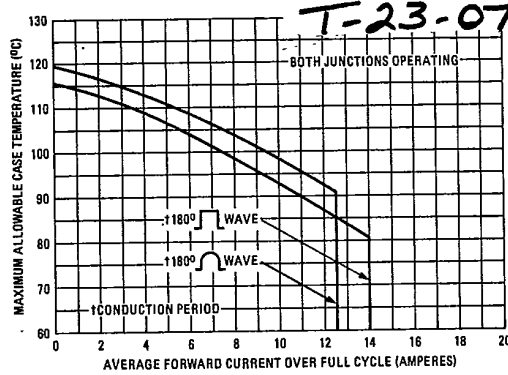


Fig. 2 - Average Forward Current Vs. Maximum Allowable Case Temperature, Per Junction, 28CPQ050 & 60

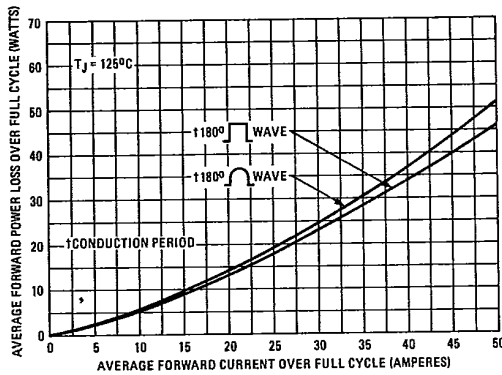


Fig. 3 - Maximum Forward Power Loss Vs. Average Forward Current, Per Junction, 28CPQ030 & 40

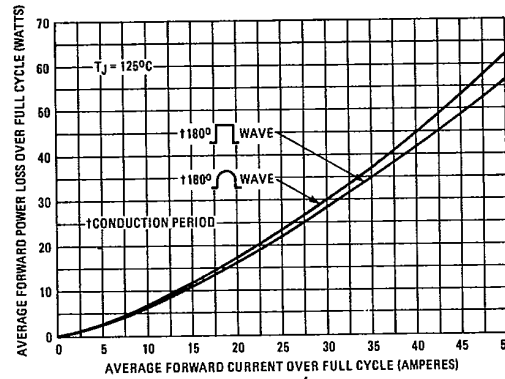


Fig. 4 - Maximum Forward Power Loss Vs. Average Forward Current, Per Junction, 28CPQ050 & 60

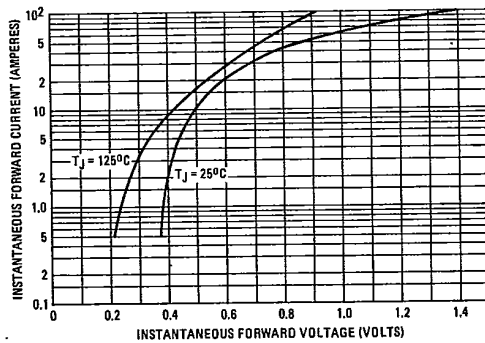


Fig. 5 - Maximum Instantaneous Forward Voltage Vs. Instantaneous Forward Current, Per Junction, 28CPQ030 & 40

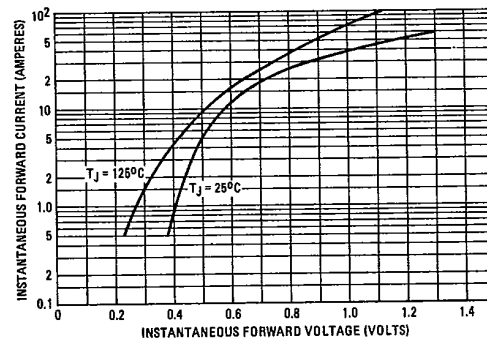


Fig. 6 - Maximum Instantaneous Forward Voltage Vs. Instantaneous Forward Current, Per Junction, 28CPQ050 & 60

C

4855452 INTERNATIONAL RECTIFIER
28CPQ Series

55C 05086 D
INTERNATIONAL RECTIFIER **IR**

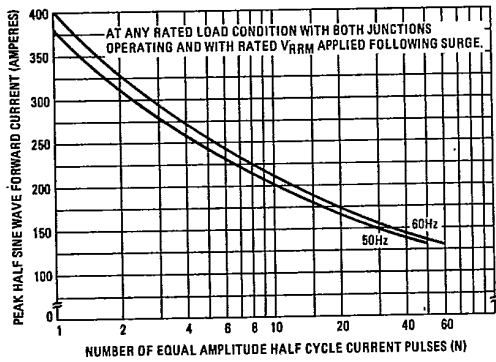


Fig. 7 - Maximum Non-Repetitive Surge Current Vs. Number of Cycles, Per Junction, 28CPQ030 & 40

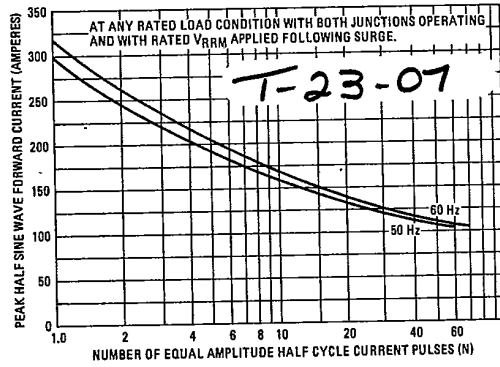


Fig. 8 - Maximum Non-Repetitive Surge Current Vs. Number of Cycles, Per Junction, 28CPQ050 & 60

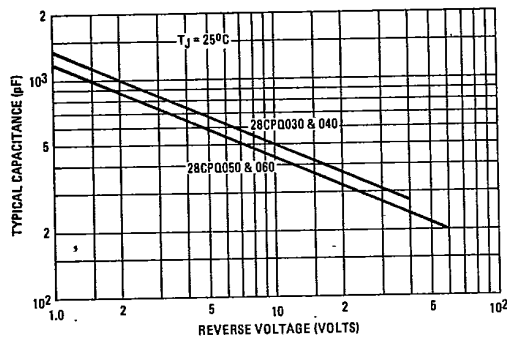


Fig. 9 - Typical Capacitance Vs. Reverse Voltage, Per Junction, All Devices

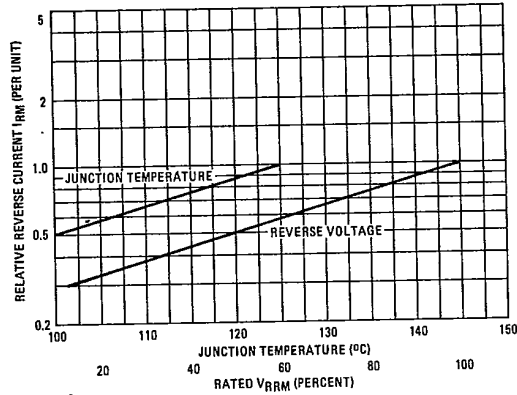


Fig. 10 - Typical Variation of Reverse Current Vs. Junction Temperature and Reverse Voltage, Per Junction, All Devices