



SVC202, 202SPA

Diffused Junction Type Silicon Diode
Varactor Diode (IOCAP)
for FM Receiver Electronic Tuning


Features

- Twin type FM electronic tuning-use varactor diode which excels in large input characteristics.

Package Dimensions


unit:mm

1074A

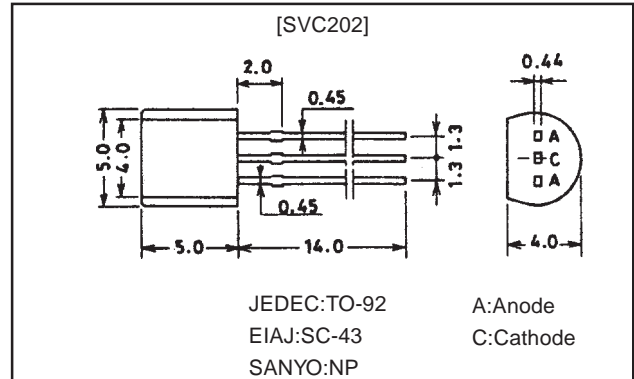


unit:mm

1129

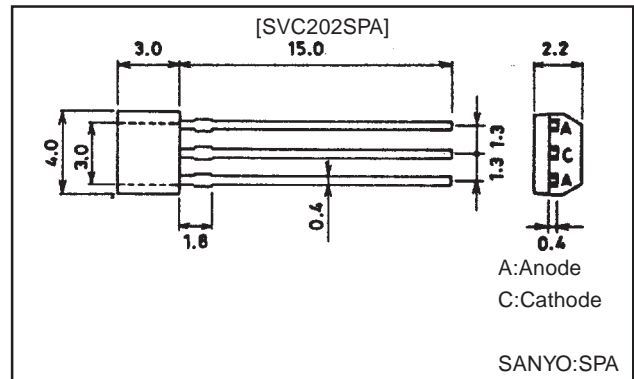

Electical Connection



Specifications

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Repetitive Voltage	V_R		-16	V
Junction Temperature	T_J		100	°C
Storage Temperature	T_{stg}		-55 to +100	°C

Electrical Characteristics at Ta = 25°C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Breakdown Voltage	$V_{(BR)R}$	$I_R = -10\mu A$	-16			V
Reverse Current	I_R	$V_R = -9V$			-50	nA
Interterminal Capacitance*	$C_{1.6V}$	$V_R = -1.6V, f = 1MHz$	28.19		37.45	pF
	$C_{3.5V}$	$V_R = -3.5V, f = 1MHz$	19.04		24.33	pF
	$C_{5.0V}$	$V_R = -5.0V, f = 1MHz$	14.48		18.49	pF
	$C_{7.5V}$	$V_R = -7.5V, f = 1MHz$	10.17		12.99	pF
Capacitance Ratio	CR	$C_{1.6V}/C_{7.5V}, f = 1MHz$	2.2		3.7	
Series Resistance	r_s	$f = 50MHz, V_R = -1V$			0.6	Ω
Matching Tolerance	ΔC_m	$(C_{max} - C_{min})/C_{min}$			0.05	

Note)*:Capacitance value of one diode


SANYO Electric Co.,Ltd. Semiconductor Bussiness Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

SVC202, 202SPA



Address and Capacitance Value (one diode)

TEST POINT	C 1.6V	C 3.5V	C 5.0V	C 7.5V
CAPACITANCE VALUE	Address Capacitance (pF)	Address Capacitance (pF)	Address Capacitance (pF)	Address Capacitance (pF)
	38 [37.45 35.67	27 [24.33 23.17	20 [18.49 17.61	11 [12.99 12.37
	37 [36.01 34.30	26 [23.39 22.28	19 [17.78 16.93	10 [12.50 11.90
	36 [34.63 32.98	25 [22.49 21.42	18 [17.09 16.28	9 [12.01 11.44
	35 [33.30 31.71	24 [21.63 20.60	17 [16.43 15.65	8 [11.54 10.99
	34 [32.02 30.50	23 [20.80 19.81	16 [15.81 15.05	7 [11.11 10.58
	33 [30.79 29.32	22 [20.00 19.04	15 [15.20 14.48	6 [10.68 10.17
32 [29.60 28.19				

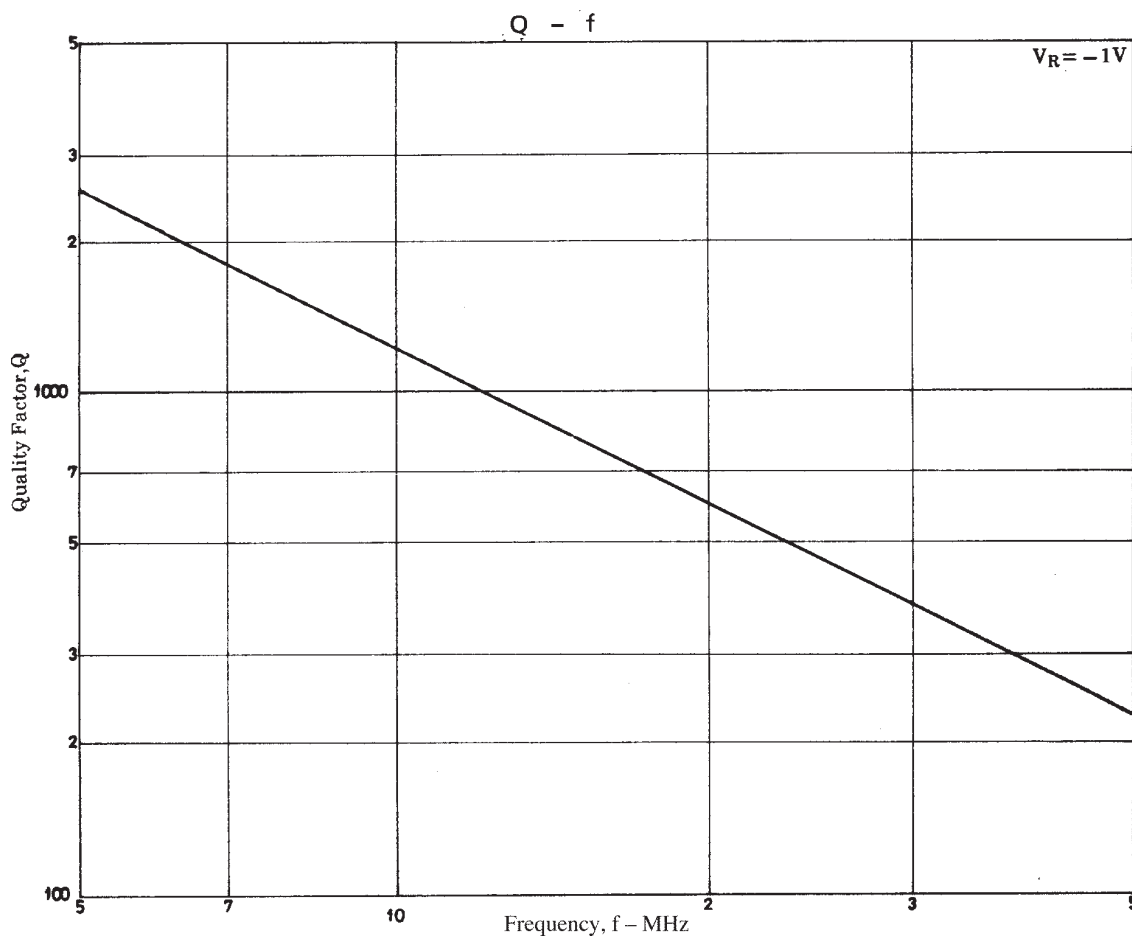

SVC202, 202SPA

C, Q - V_R

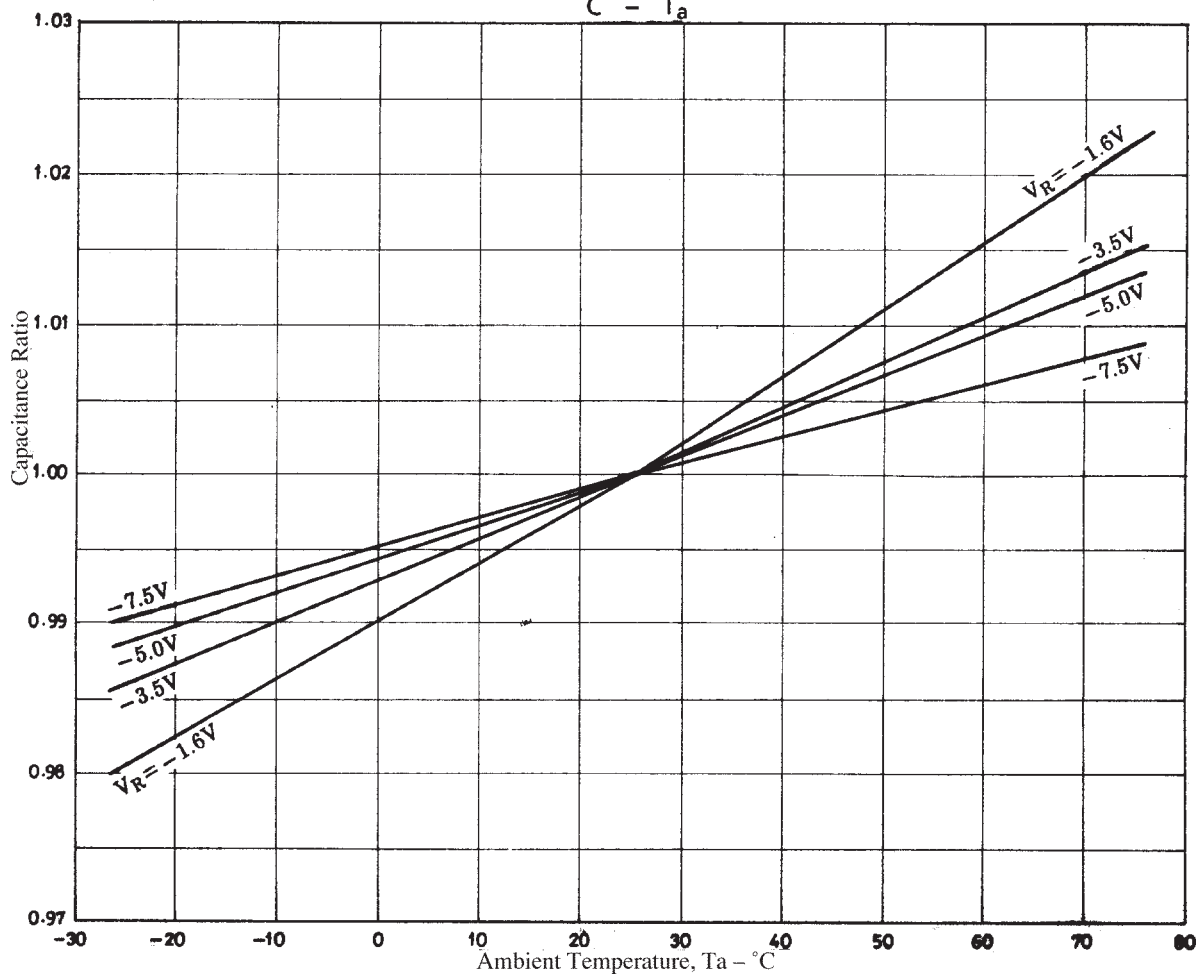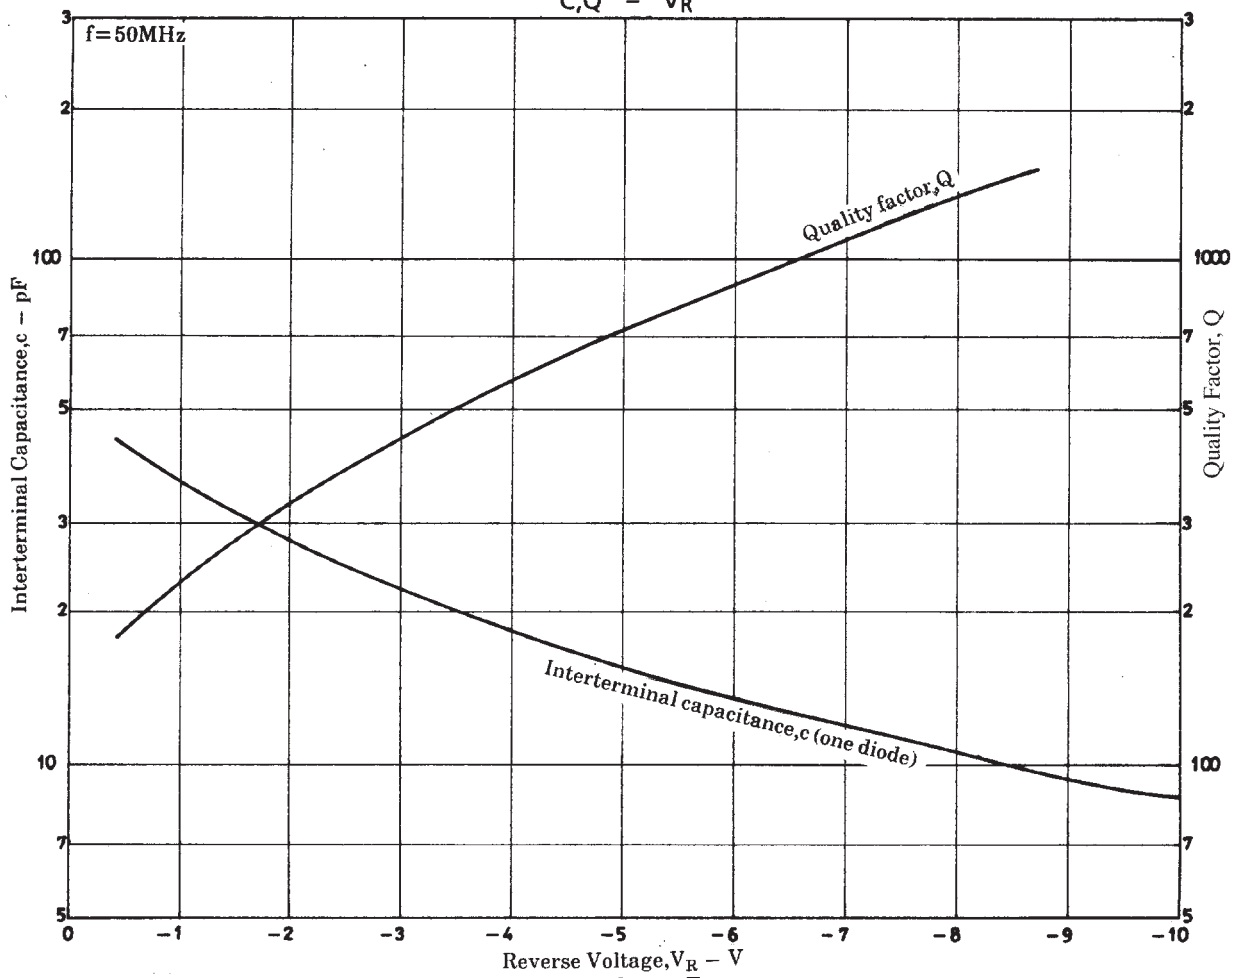

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 1998. Specifications and information herein are subject to change without notice.