



Features

- Lead free versions available
- RoHS compliant (lead free version)*
- Bidirectional EMI filtering
- Low capacitance per line
- ESD protection
- Protects 6 data lines

Applications


- Cell phones
- PDAs and notebooks
- Digital cameras
- MP3 players and GPS

2FAG-C15R - Integrated Passive & Active Device using CSP

General Information

The 2FAG-C15R device, manufactured using Thin Film on Silicon technology, provides ESD protection and EMI filtering for the LCD displays of portable electronic devices such as cell phones, modems and PDAs. The device incorporates six low pass filter channels where each channel has a series 100 ohm resistor assuring a minimum of -25 dB attenuation from 800 MHz to 3 GHz.

Each internal and external port of the six channels includes a TVS diode for ESD protection. The ESD protection provided by the component enables a data port to withstand a minimum ± 8 kV Contact / ± 15 kV Air Discharge per the ESD test method specified in IEC 61000-4-2. The device measures 1.33 mm x 2.96 mm and is available in a 15 bump CSP package intended to be mounted directly onto an FR4 printed circuit board. The CSP device meets typical thermal cycle and bend test specifications without the use of an underfill material.

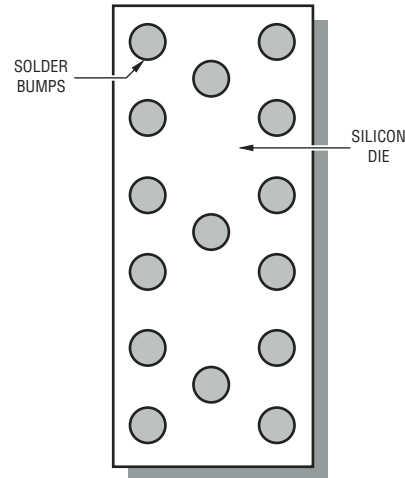

Electrical & Thermal Characteristics

| Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted) | Symbol | Minimum | Nominal | Maximum | Unit |
|--|-----------|----------|---------|---------|------------------|
| <i>Per Line Specification</i> | | | | | |
| Resistance | R | 80 | 100 | 120 | Ω |
| Capacitance @ 2.5 V 1 MHz | C | 24 | 30 | 36 | pF |
| Rated Standoff Voltage | V_{WM} | | 5.0 | | V |
| Breakdown Voltage @ 1 mA | V_{BR} | 6.0 | | | V |
| Forward Voltage @ 10 mA | V_F | | 0.8 | | V |
| Leakage Current @ 3.3 V | I_R | | 0.1 | 0.5 | μA |
| Filter Attenuation @ 800 - 3000 MHz | S21 | -25 | -30 | | dB |
| ESD Protection: IEC 61000-4-2 | | | | | |
| Contact Discharge | | ± 8 | | | kV |
| Air Discharge | | ± 15 | | | kV |
| Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | |
| Operating Temperature Range | T_J | -40 | 25 | +85 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -55 | 25 | +150 | $^\circ\text{C}$ |
| Power Dissipation Per Resistor | P_D | | | 100 | mW |



Reliable Electronic Solutions

Asia-Pacific: TEL +886- (0)2 25624117 • FAX +886- (0)2 25624116

Europe: TEL +41-41 768 5555 • FAX +41-41 768 5510

The Americas: TEL +1-951 781-5492 • FAX +1-951 781-5700

www.bourns.com

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex

Specifications are subject to change without notice.


Customers should verify actual device performance in their specific applications.

2FAG-C15R - Integrated Passive & Active Device using CSP

BOURNS®

Mechanical Characteristics

This is a Silicon-based device and is packaged using chip scale packaging technology. Solder bumps, formed on the Silicon die, provide the interconnect medium from die to PCB. The bumps are arranged on the die in a regular grid formation. The grid pitch is 0.5 mm and the dimensions for the packaged device are shown below.

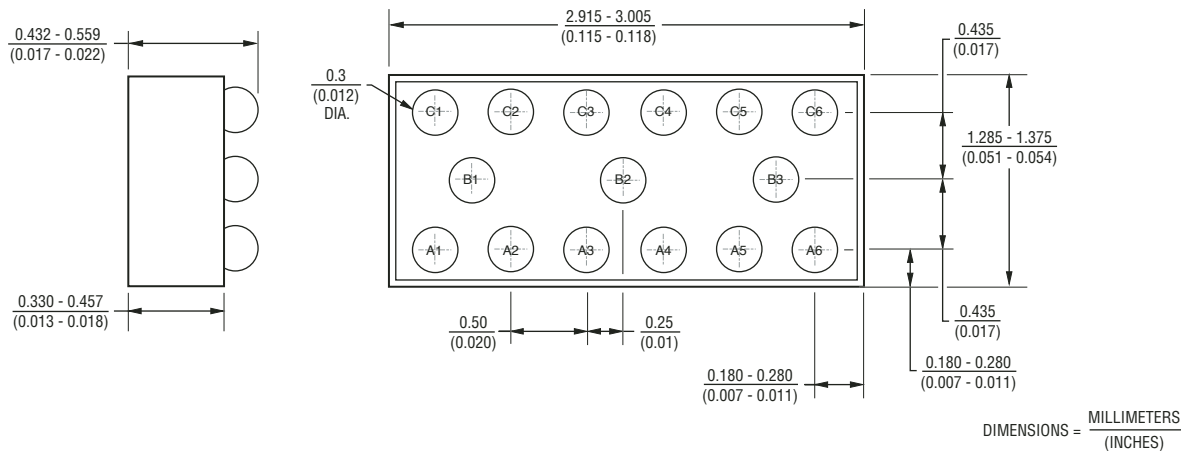


Reliability Data

Reliability data exists and continues to be gathered on an ongoing basis for Bourns Integrated Passive and Active Devices.

“Package level” testing of the integrity of the solder joint is carried out on an independent Daisy-Chain test device. A 25-Pin Daisy Chain component is available from Bourns for this purpose (part number 2TAD-C25R). This is a 5 x 5 array featuring 0.5 mm pitch solder bumps. The Distance to Neutral Point (DNP) on that component is similar to that of the 2FAG-C15R and is thus deemed a comparable case for Thermal Cycle testing.

“Silicon level” reliability performance will be assured by similarity to other integrated passive CSP devices from Bourns.

Frequency Response

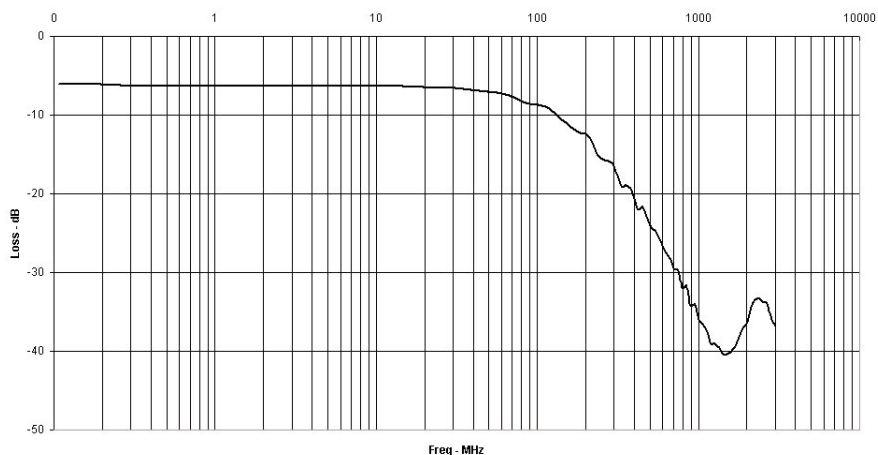


Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

2FAG-C15R - Integrated Passive & Active Device using CSP



Block Diagram


The CSP device block diagram below includes the pin names and basic electrical connections associated with each channel.

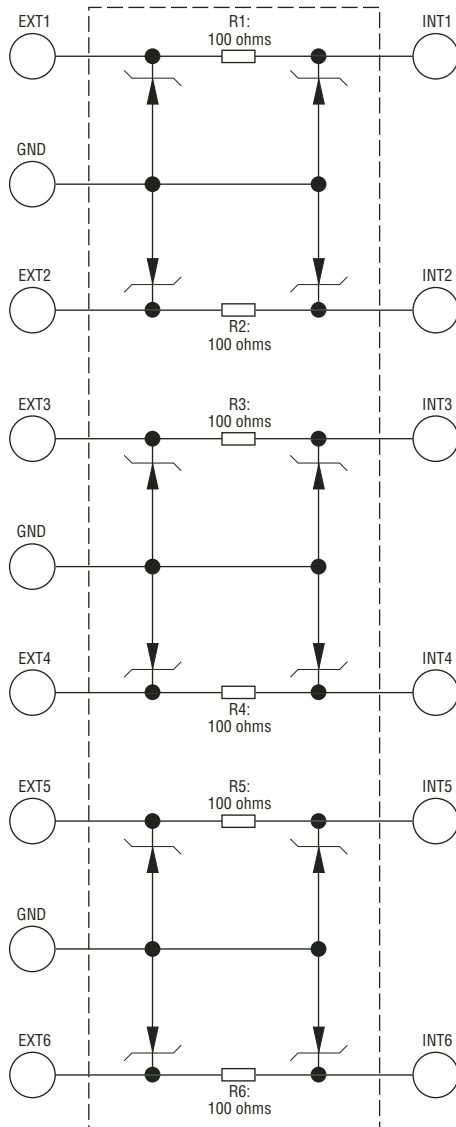

PCB Design and SMT Processing

Please consult the "Bourns Design Guide Using CSP" for notes on PCB design and SMT Processing.

How to Order

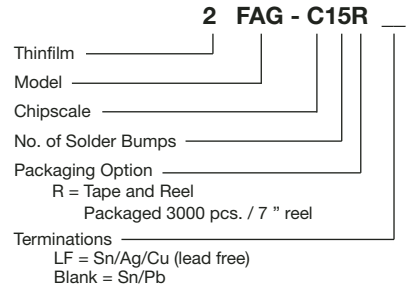


2FAG-C15R - Integrated Passive & Active Device using CSP



Device Pin Out

The Pin-Out for the device is shown below with the bumps facing up.

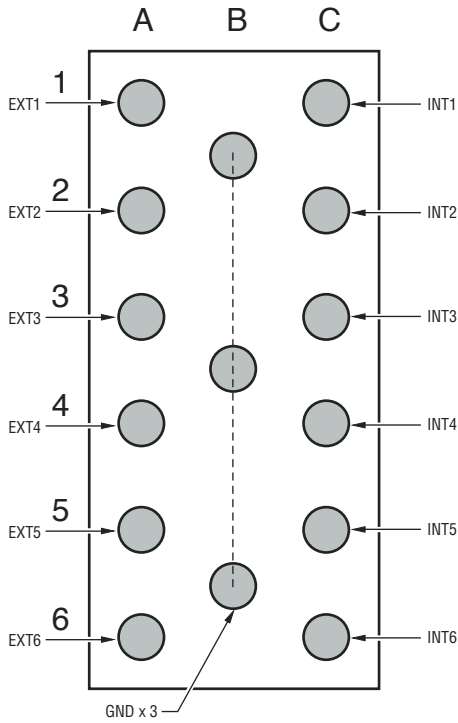

| Pin Out | Function | Pin Out | Function |
|---------|----------|---------|----------|
| A1 | EXT1 | C1 | INT1 |
| A2 | EXT2 | C2 | INT2 |
| A3 | EXT3 | C3 | INT3 |
| A4 | EXT4 | C4 | INT4 |
| A5 | EXT5 | C5 | INT5 |
| A6 | EXT6 | C6 | INT6 |
| B1 | GND | | |
| B2 | GND | | |
| B3 | GND | | |

Packaging

The surface mount product will be dispensed in an 8 mm x 4 mm Tape and Reel format per EIA-481 standard.

