

ISOLATED DC/DC CONVERTERS

48 Vdc Input 3.3 Vdc - 24 Vdc/7 A - 1.25 A Output

bel
POWER PRODUCTS

ORLC-25T Series RoHS Compliant Rev.A

- Fixed Frequency (230 kHz)
- Output Over Voltage Shut Down
- Isolated
- High Efficiency
- High Power Density
- Low Cost
- Safety Approval to UL60950-1 (Pending)
- Remote On/Off
- Output Voltage Trim
- Input Under Voltage Lockout
- SCP/OCP
- Over Temperature Protection
- Remote On/Off Logic (Option)



Description

The ORLC-25T series are isolated dc/dc converters that operate from a nominal 48 Vdc source. These units will provide up to 30 W of output power. These units are designed to be high efficient and very low cost. Features include remote on/off, over current protection, and under voltage lockout. These converters are provided in an industry standard package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
3.3 Vdc	36 Vdc - 75 Vdc	7 A	23 W	88%	ORLC-25T033	ORLC-25T03L
5.0 Vdc	36 Vdc - 75 Vdc	5 A	25 W	90%	ORLC-25T050	ORLC-25T05L
12.0 Vdc	36 Vdc - 75 Vdc	2.5 A	30 W	90%	ORLC-25T120	ORLC-25T12L
15.0 Vdc	36 Vdc - 75 Vdc	2.0 A	30 W	90%	ORLC-25T150	ORLC-25T15L
24.0 Vdc	36 Vdc - 75 Vdc	1.25 A	30 W	91%	ORLC-25T240	ORLC-25T24L

- Notes:** 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.
2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	80 V	100 V for 100 mS Max
Remote On/Off	-0.3 V	-	12 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	36 V	-	75 V	
Input Current	-	-	1.1 A	
Input Current (no load)	-	25 mA	40 mA	
Remote Off Input Current	-	3 mA	10 mA	
Input Reflected Ripple Current (rms)	-	10 mA	20 mA	With simulated source impedance of 10 uH, 5 Hz to 20 MHz. And use a 100 uF/ 100 V electrolytic capacitor with ESR=1 ohm max, at 200 kHz.
Input Reflected Ripple Current (pk-pk)	-	40 mA	60 mA	
I ² t Inrush Current Transient	-	0.012 A ² s	0.024 A ² s	
Turn-on Input Voltage	31 V	34 V	36 V	
Turn-off Input Voltage	30 V	33 V	35 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

ISOLATED DC/DC CONVERTERS

48 Vdc Input 3.3 Vdc - 24 Vdc/7 A - 1.25 A Output



Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point				Test condition: $V_{in}=48\text{ V}$, $I_o=50\%$ full load at the output.
$V_o=3.3\text{ V}$	3.234 V	3.3 V	3.366 V	
$V_o=5.0\text{ V}$	4.900 V	5.0 V	5.100 V	
$V_o=12.0\text{ V}$	11.76 V	12.0 V	12.240 V	
$V_o=15.0\text{ V}$	14.70 V	15.0 V	15.300 V	
$V_o=24.0\text{ V}$	23.52 V	24.0 V	24.480 V	
Line Regulation				
$V_o=3.3\text{ V}$	-	$\pm 1\text{ mV}$	$\pm 3\text{ mV}$	
$V_o=5.0\text{ V}$	-	$\pm 2\text{ mV}$	$\pm 5\text{ mV}$	
$V_o=12.0\text{ V}$	-	$\pm 5\text{ mV}$	$\pm 10\text{ mV}$	
$V_o=15.0\text{ V}$	-	$\pm 8\text{ mV}$	$\pm 15\text{ mV}$	
$V_o=24.0\text{ V}$	-	$\pm 10\text{ mV}$	$\pm 20\text{ mV}$	
Load Regulation				
$V_o=3.3\text{ V}$	-	$\pm 2\text{ mV}$	$\pm 5\text{ mV}$	
$V_o=5.0\text{ V}$	-	$\pm 4\text{ mV}$	$\pm 8\text{ mV}$	
$V_o=12.0\text{ V}$	-	$\pm 9\text{ mV}$	$\pm 18\text{ mV}$	
$V_o=15.0\text{ V}$	-	$\pm 10\text{ mV}$	$\pm 20\text{ mV}$	
$V_o=24.0\text{ V}$	-	$\pm 15\text{ mV}$	$\pm 30\text{ mV}$	
Temperature Regulation (-40 °C to +85 °C)				
$V_o=3.3\text{ V}$	-	30 mV	50 mV	
$V_o=5.0\text{ V}$	-	40 mV	70 mV	
$V_o=12.0\text{ V}$	-	100 mV	170 mV	
$V_o=15.0\text{ V}$	-	120 mV	200 mV	
$V_o=24.0\text{ V}$	-	150 mV	240 mV	
Ripple and Noise (rms)				Test condition of the output ripple and noise: 0-20 MHz BW, with a 1 μF ceramic capacitor and a 220 μF /35 V at the output.
$V_o=3.3\text{ V}$	-	10 mV	20 mV	
$V_o=5.0\text{ V}$	-	10 mV	20 mV	
$V_o=12.0\text{ V}$	-	10 mV	20 mV	
$V_o=15.0\text{ V}$	-	15 mV	30 mV	
$V_o=24.0\text{ V}$	-	20 mV	40 mV	
Ripple and Noise (pk-pk)				
$V_o=3.3\text{ V}$	-	40 mV	75 mV	
$V_o=5.0\text{ V}$	-	40 mV	75 mV	
$V_o=12.0\text{ V}$	-	40 mV	75 mV	
$V_o=15.0\text{ V}$	-	80 mV	120 mV	
$V_o=24.0\text{ V}$	-	85 mV	150 mV	
Output Current				
$V_o=3.3\text{ V}$	0 A	-	7.0 A	
$V_o=5.0\text{ V}$	0 A	-	5.0 A	
$V_o=12.0\text{ V}$	0 A	-	2.5 A	
$V_o=15.0\text{ V}$	0 A	-	2.0 A	
$V_o=24.0\text{ V}$	0 A	-	1.25 A	
Current Limit Threshold				
$V_o=3.3\text{ V}$	7.7 A	-	12.0 A	
$V_o=5.0\text{ V}$	5.5 A	-	8.0 A	
$V_o=12.0\text{ V}$	3.0 A	-	4.2 A	
$V_o=15.0\text{ V}$	2.2 A	-	3.4 A	
$V_o=24.0\text{ V}$	1.5 A	-	2.2 A	
Short Circuit Surge Transient	-	0.5 A ² s	1 A ² s	
Turn on Time	-	10 mS	25 mS	
Overshoot at Turn On	-	0%	5%	
Output Capacitance				
$V_o=3.3\text{ V}$	0 μF	-	3300 μF	
$V_o=5.0\text{ V}$	0 μF	-	2200 μF	
$V_o=12.0\text{ V}$	0 μF	-	330 μF	
$V_o=15.0\text{ V}$	0 μF	-	330 μF	
$V_o=24.0\text{ V}$	0 μF	-	330 μF	

ISOLATED DC/DC CONVERTERS

48 Vdc Input 3.3 Vdc - 24 Vdc/7 A - 1.25 A Output



Output Specifications (continued)

Parameter		Min	Typ	Max	Notes
Transient Response					
50% ~ 75% Max Load	Overshoot	Vo=3.3 V	-	75 mV	100 mV
	Settling Time		-	150 μ S	200 μ S
25% ~ 50% Max Load	Overshoot	Vo=3.3 V	-	75 mV	100 mV
	Settling Time		-	150 μ S	200 μ S
50% ~ 75% Max Load	Overshoot	Vo=5.0 V	-	100 mV	150 mV
	Settling Time		-	150 μ S	200 μ S
25% ~ 50% Max Load	Overshoot	Vo=5.0 V	-	100 mV	150 mV
	Settling Time		-	150 μ S	200 μ S
50% ~ 75% Max Load	Overshoot	Vo=12.0 V	-	150 mV	200 mV
	Settling Time		-	150 μ S	200 μ S
25% ~ 50% Max Load	Overshoot	Vo=12.0 V	-	150 mV	200 mV
	Settling Time		-	150 μ S	200 μ S
50% ~ 75% Max Load	Overshoot	Vo=15.0 V	-	100 mV	200 mV
	Settling Time		-	200 μ S	300 μ S
25% ~ 50% Max Load	Overshoot	Vo=15.0 V	-	100 mV	200 mV
	Settling Time		-	200 μ S	300 μ S
50% ~ 75% Max Load	Overshoot	Vo=24.0 V	-	150 mV	300 mV
	Settling Time		-	300 μ S	500 μ S
25% ~ 50% Max Load	Overshoot	Vo=24.0 V	-	150 mV	300 mV
	Settling Time		-	300 μ S	500 μ S

Test condition of the transient response: di/dt=0.1 A/ μ s, Vin=48 V, with a 220 μ F/35 V electrolytic capacitor at the output.

Note: All specifications are typical at nominal input, full load at 25°C unless noted.

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=48 V, Io=Io, max
Vo=3.3 V	85%	88%	-	
Vo=5.0 V	87%	90%	-	
Vo=12.0 V	87%	90%	-	
Vo=15.0 V	87%	90%	-	
Vo=24.0 V	86%	89%	-	
Switching Frequency	200 kHz	230 kHz	260 kHz	
Output Trim Range	90% Vo	-	110% Vo	
I/O Isolation Voltage	1500 V	-	-	
Isolation Capacitance	-	1500 pF	-	
Output Voltage Trim Range	90%	-	110%	
Over Temperature Protection	-	110 °C	-	
Over Voltage Protection				Test condition of Over Voltage Protection: Vin=48 V, Io=100% load at 25 °C ambient.
Vo=3.3 V	3.9 V	-	5.0 V	
Vo=5.0 V	5.7 V	-	7.0 V	
Vo=12.0 V	13.6 V	-	14.2 V	
Vo=15.0 V	18.0 V	-	22.5 V	
Vo=24.0 V	28.8 V	-	36.0 V	
MTBF	2,602,427 hours			Calculated Per Bell Core SR-332 (Io = 80% load; Vin=48 V; Vo=3.3 V; Ta = 25 °C)
Dimensions				
Inches (L x W x H)	2.0 x 1.0 x 0.438			
Millimeters (L x W x H)	50.8 x 25.4 x 11.14			
Weight	-	20 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

ISOLATED DC/DC CONVERTERS

48 Vdc Input 3.3 Vdc - 24 Vdc/7 A - 1.25 A Output



Control Specifications



Parameter	Min	Typ	Max	Notes	
Remote On/Off					
Signal Low (Unit On)	Active Low	-0.3 V	-	0.8 V	The remote On/Off pin open, Unit On.
Signal High (Unit Off)		3.5 V	-	12 V	
Signal Low (Unit Off)	Active High	-0.3 V	-	0.8 V	
Signal High (Unit On)		3.5 V	-	12 V	
Current Sink	0.3 mA	-	0.75 mA		

Output Trim Equations

Equations for calculating the trim resistor (in kΩ) given the desired adjusted voltage (V_{adj}) and the nominal output voltage of the converter (V_{nom}) are shown below. The Trim Down resistor should be connected between the Trim pin and V_{out} . The Trim Up resistor should be connected between the Trim pin and Ground. Only one of the resistors should be used for any given application.

$$R_{trim_down} = \frac{A}{V_{nom} - V_{adj}} - B$$

$$R_{trim_up} = \frac{C}{V_{adj} - V_{nom}} - D$$

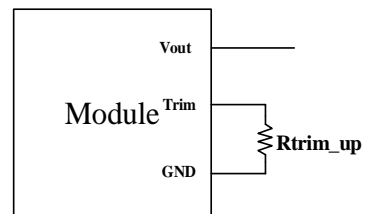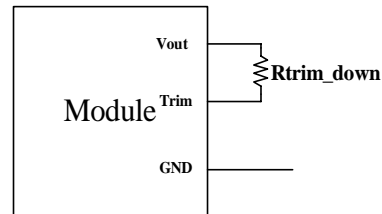


Vnom	A	B	C	D
24.0	272.305	15.664	31.634	3.010
15.0	92.125	9.360	18.400	2.000
12.0	53.320	9.260	14.025	3.650
5.0	19.300	15.120	6.350	10.000
3.3	21.711	40.610	13.032	30.100

ISOLATED DC/DC CONVERTERS


48 Vdc Input 3.3 Vdc - 24 Vdc/7 A - 1.25 A Output




Efficiency Data

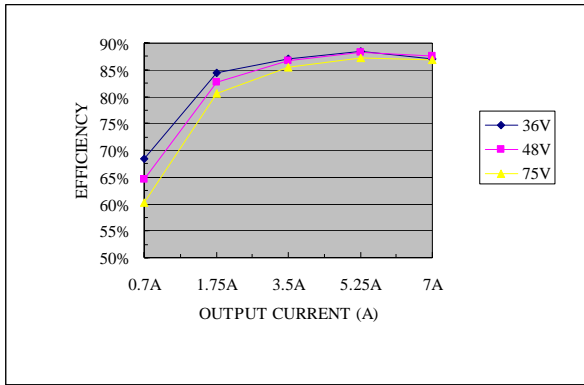


ORLC-25T033

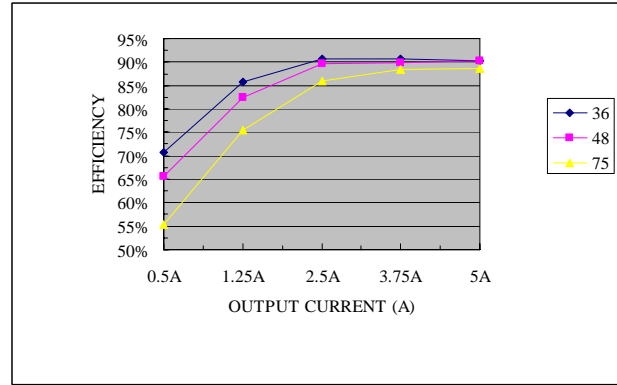


ORLC-25T050

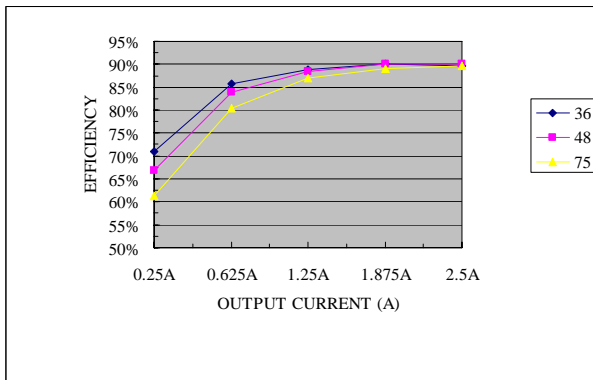

ORLC-25T120

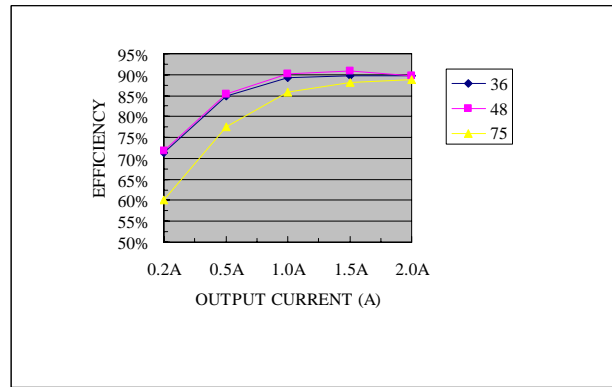

ORLC-25T150

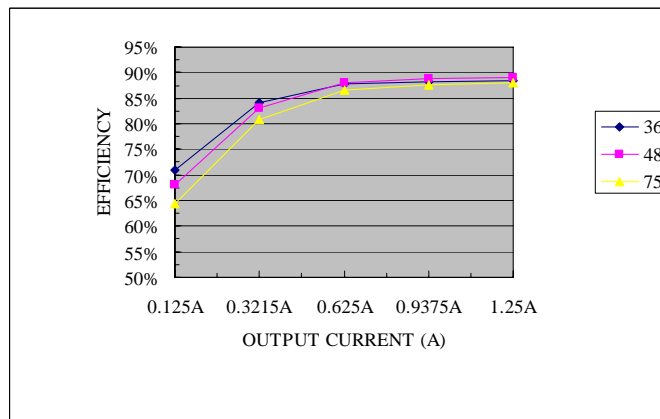


ORLC-25T240

ISOLATED DC/DC CONVERTERS


48 Vdc Input 3.3 Vdc - 24 Vdc/7 A - 1.25 A Output




Thermal Derating Curves

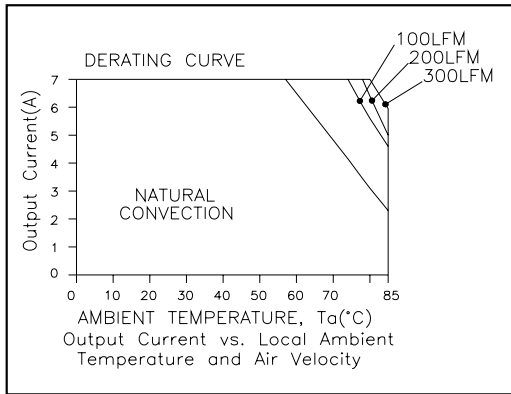


ORLC-25T033

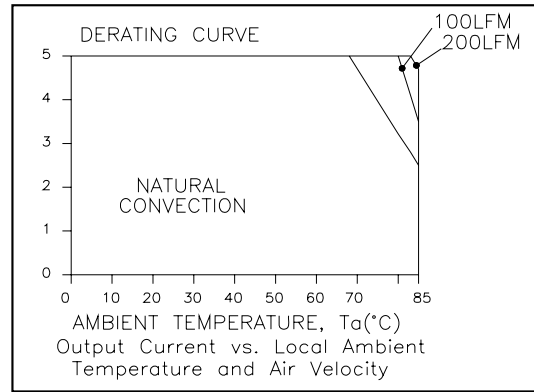


ORLC-25T050

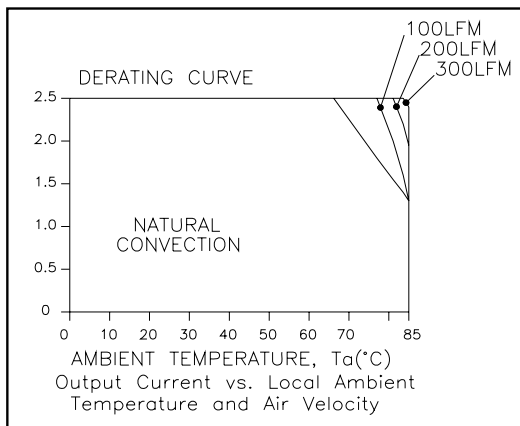

ORLC-25T120

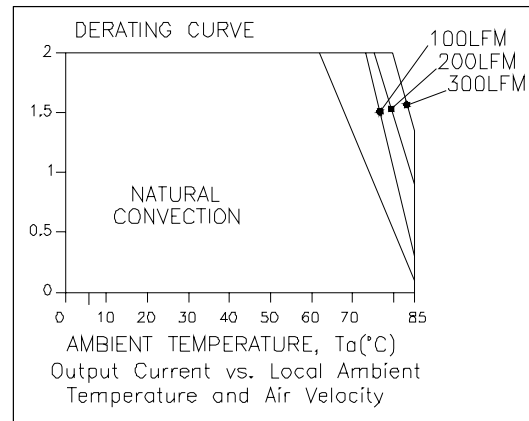

ORLC-25T150

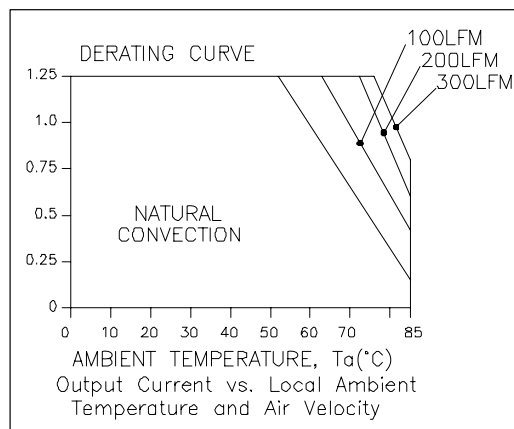



ORLC-25T240

ISOLATED DC/DC CONVERTERS

48 Vdc Input 3.3 Vdc - 24 Vdc/7 A - 1.25 A Output





Ripple and Noise Waveforms

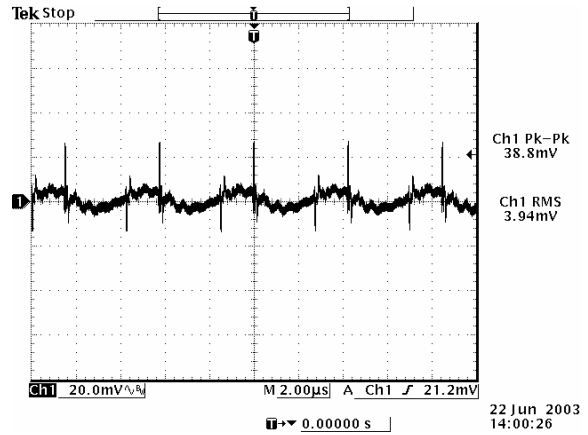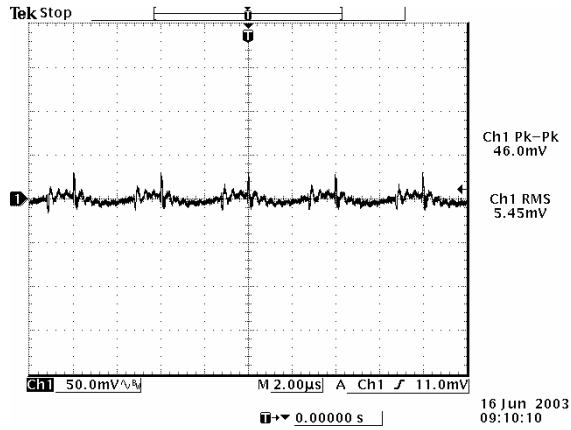


Ripple and noise at full load, 3.3 Vdc/7 A output

Ripple and noise at full load, 5.0 Vdc/5 A output

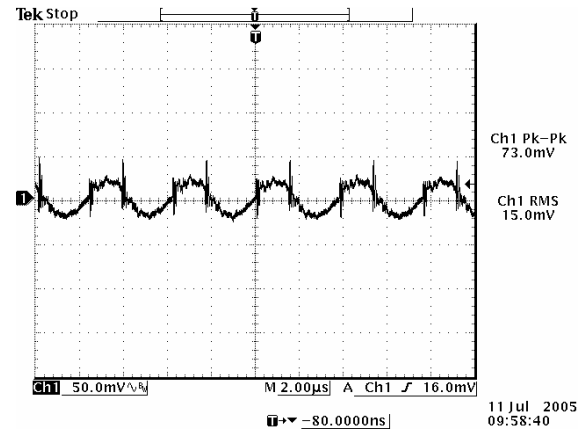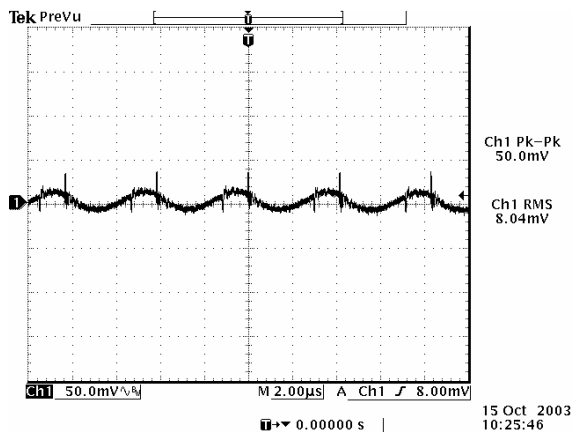

Ripple and noise at full load, 12 Vdc/2.5 A output

Ripple and noise at full load, 15 Vdc/2 A output

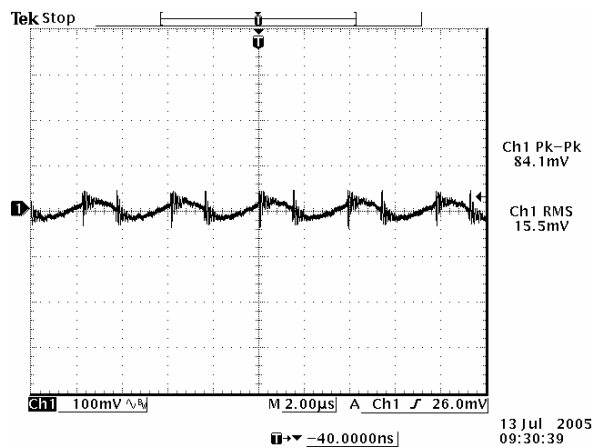

Ripple and noise at full load, 24 Vdc/1.25 A output


Note: Ripple and noise at 48 Vdc input, with a 0.47 µF ceramic cap at the output, Ta=25 deg C.

ISOLATED DC/DC CONVERTERS


48 Vdc Input 3.3 Vdc - 24 Vdc/7 A - 1.25 A Output




Transient Response Waveforms

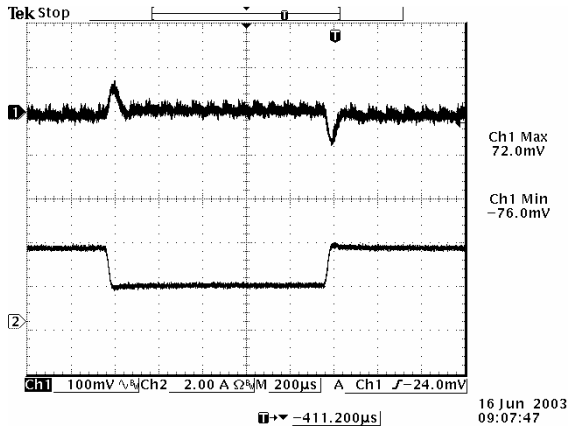


Transients 25% to 50% load 3.3 Vdc output

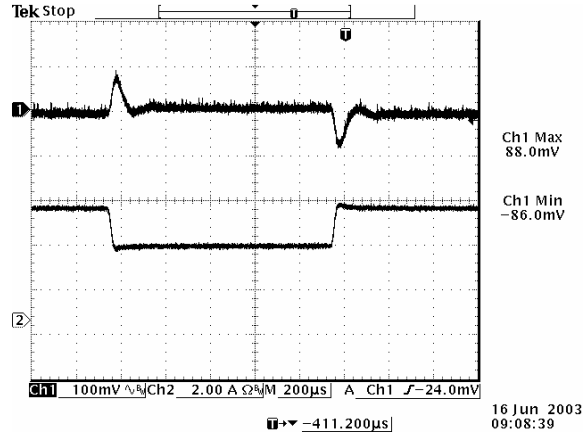


Transients 50% to 75% load 3.3 Vdc output

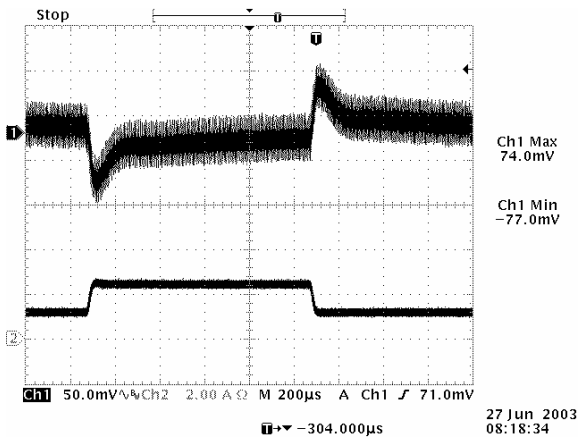


Transients 25% to 50% load 5.0 Vdc output

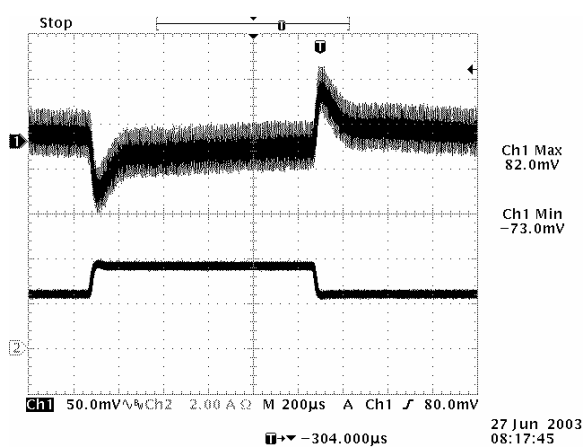

Transients 50% to 75% load 5.0 Vdc output

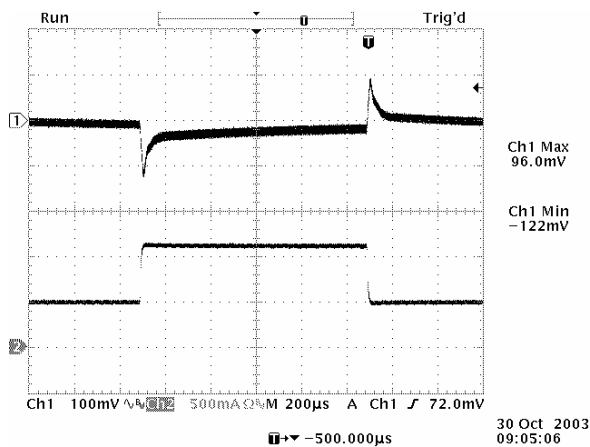

Transients 25% to 50% load 12 Vdc output

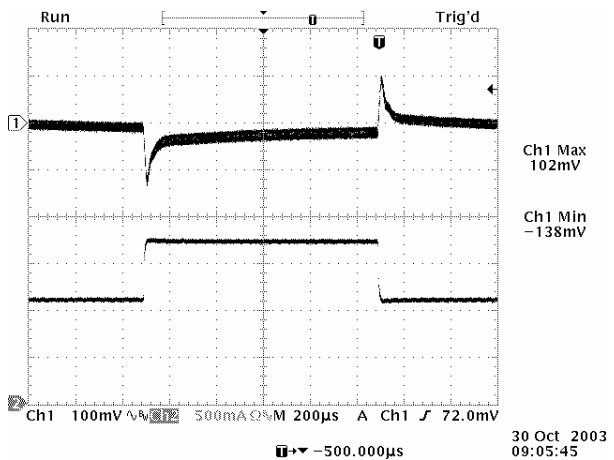


Transients 50% to 75% load 12 Vdc output

ISOLATED DC/DC CONVERTERS


48 Vdc Input 3.3 Vdc - 24 Vdc/7 A - 1.25 A Output




Transient Response Waveforms (continued)

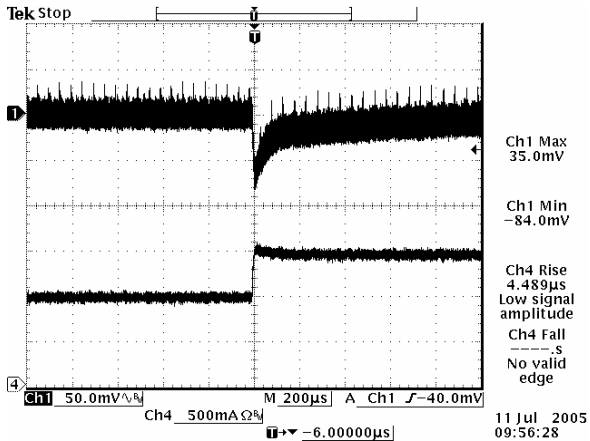


Transients 25% to 50% load 15 Vdc output

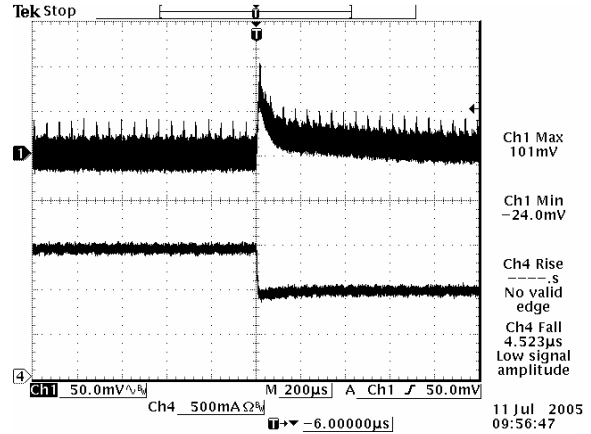

Transients 50% to 75% load 15 Vdc output

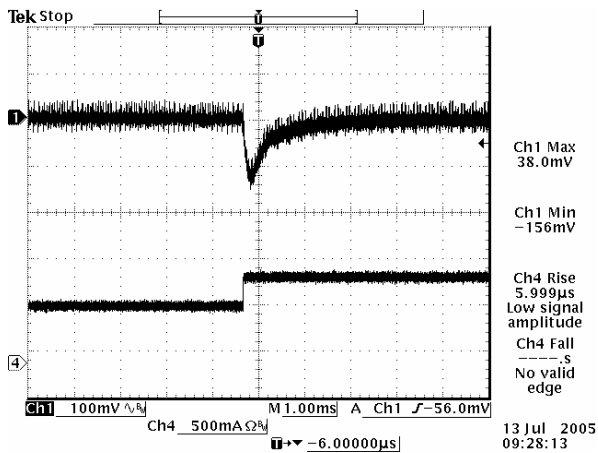

Transients 25% to 50% load 24 Vdc output

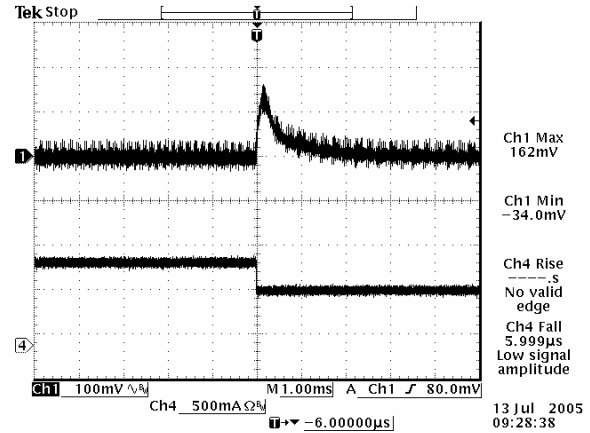

Transients 50% to 75% load 24 Vdc output




Note: Transient response at 48 Vdc input, $di/dt=0.1$ A/µs, with external 220 µF electrolytic cap and 0.47 µF ceramic cap at the output, and $T_a=25$ deg C.

ISOLATED DC/DC CONVERTERS

48 Vdc Input 3.3 Vdc - 24 Vdc/7 A - 1.25 A Output



Mechanical Outline

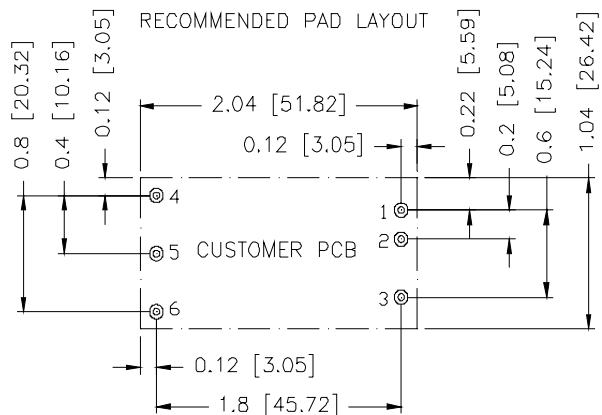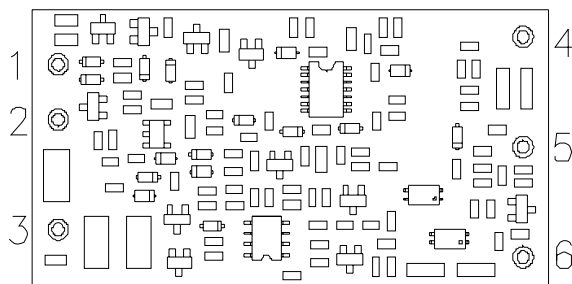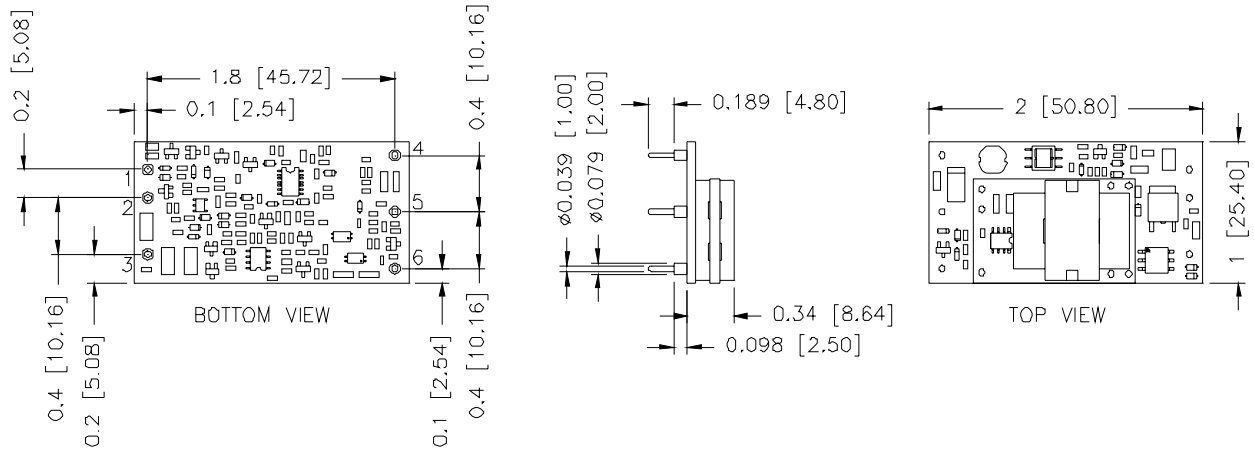

HOLE SIZE: $\phi 0.047$ [1.19]
 PAD SIZE: $\phi 0.1$ [2.54] BOTH SIDE

Pin Connections

Pin	Function
1	Vin+
2	Vin-
3	CNT
4	Vo+
5	Vo-
6	Trim

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 030207

CORPORATE

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
 8F/ 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite G7, Preston
 Lancashire, PR1 8UD, U.K.
 Tel 44-1772-556601
 Fax 44-1772-888366
www.belfuse.com