

# 2SB1252

## Silicon PNP epitaxial planar type Darlington

For power amplification

Complementary to 2SD1892

**■ Features**

- Optimum for 35W HiFi output
- High forward current transfer ratio  $h_{FE}$ : 5000 to 30000
- Low collector to emitter saturation voltage  $V_{CE(sat)}$ : < 2.5V
- Full-pack package which can be installed to the heat sink with one screw

**■ Absolute Maximum Ratings** ( $T_C=25^\circ C$ )


Parameter	Symbol	Ratings	Unit	
Collector to base voltage	$V_{CBO}$	-120	V	
Collector to emitter voltage	$V_{CEO}$	-100	V	
Emitter to base voltage	$V_{EBO}$	-5	V	
Peak collector current	$I_{CP}$	-8	A	
Collector current	$I_C$	-5	A	
Collector power dissipation	$P_C$	$T_C=25^\circ C$	45	W
		$T_a=25^\circ C$	2	
Junction temperature	$T_j$	150	$^\circ C$	
Storage temperature	$T_{stg}$	-55 to +150	$^\circ C$	

**■ Electrical Characteristics** ( $T_C=25^\circ C$ )


Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	$I_{CBO}$	$V_{CB} = -120V, I_E = 0$			-100	$\mu A$
	$I_{CEO}$	$V_{CE} = -100V, I_B = 0$			-100	$\mu A$
Emitter cutoff current	$I_{EBO}$	$V_{EB} = -5V, I_C = 0$			-100	$\mu A$
Collector to emitter voltage	$V_{CEO}$	$I_C = -30mA, I_B = 0$	-100			V
Forward current transfer ratio	$h_{FE1}$	$V_{CE} = -5V, I_C = -1A$	2000			
	$h_{FE2}^*$	$V_{CE} = -5V, I_C = -4A$	5000		30000	
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = -4A, I_B = -4mA$			-2.5	V
Base to emitter saturation voltage	$V_{BE(sat)}$	$I_C = -4A, I_B = -4mA$			-3.0	V
Transition frequency	$f_T$	$V_{CE} = -10V, I_C = -0.5A, f = 1MHz$		20		MHz
Turn-on time	$t_{on}$	$I_C = -4A, I_{B1} = -4mA, I_{B2} = 4mA, V_{CC} = -50V$		1.0		$\mu s$
Storage time	$t_{stg}$			0.8		$\mu s$
Fall time	$t_f$			1.0		$\mu s$

\* $h_{FE2}$  Rank classification


Rank	Q	P
$h_{FE2}$	5000 to 15000	8000 to 30000

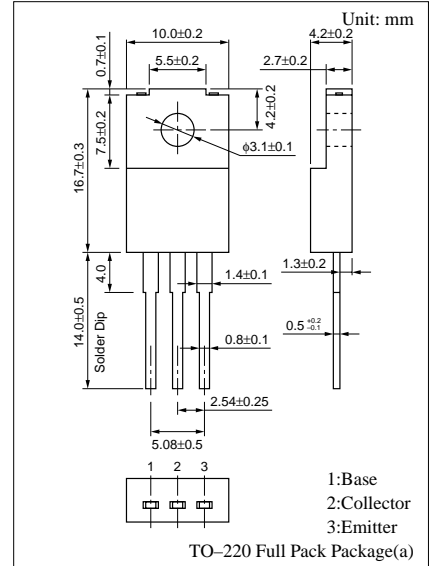


Internal Connection

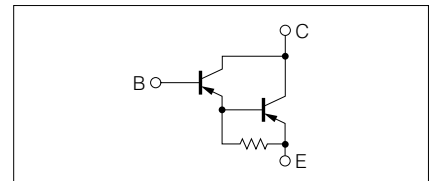


$P_C - T_a$

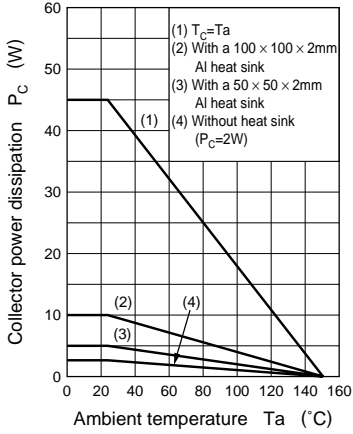


$I_C - V_{CE}$

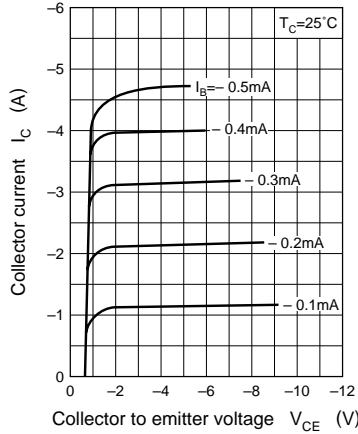


$V_{CE(sat)} - I_C$

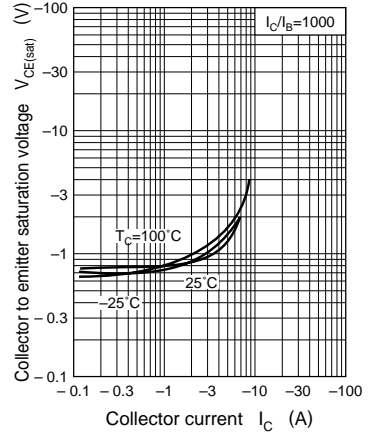


$V_{BE(sat)} - I_C$

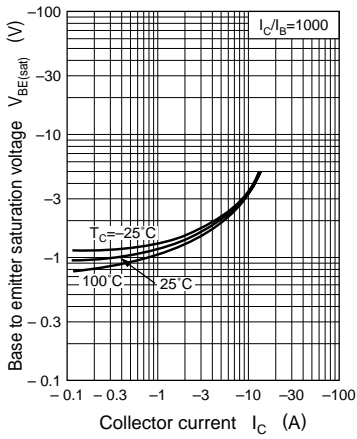


$h_{FE} - I_C$

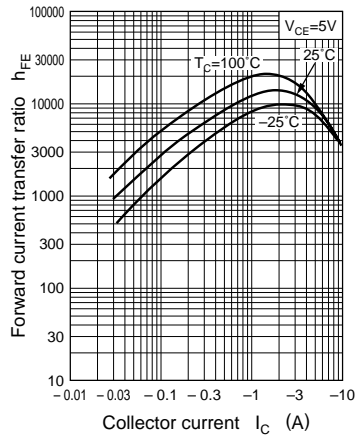


$C_{ob} - V_{CB}$

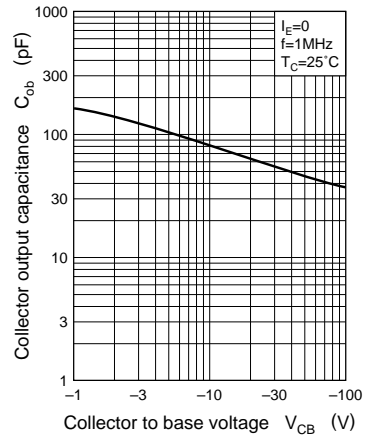

$t_{on}, t_{stg}, t_f - I_C$

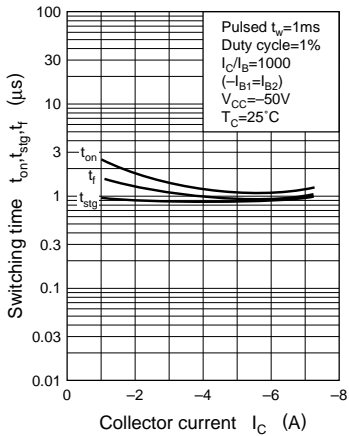

Area of safe operation (ASO)

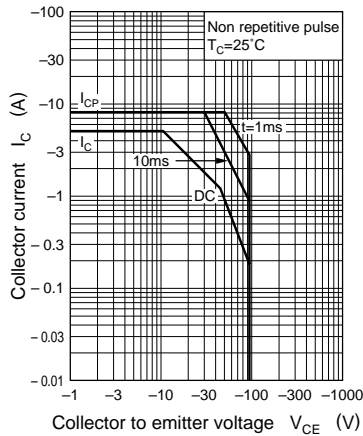

$$R_{th(t)} - t$$

