

Features

- DC to 1 GHz
- Flanged model
- Low VSWR

Applications

- High power RF transmission

CHF190104CBF Series 800 W Power RF Flanged Chip Termination/Resistor

General Specifications


SubstrateBeo
 Resistive Film.....Thick Film
 TabAg
 Cover Substrate.....AL203
 Mounting FlangeCu plated with Ni
 Resistance.....50 Ω
 Tolerance±5 %
 Packaging25 pcs./tray

Absolute Ratings


Power.....800 W
 Frequency1.0 GHz
 VSWR.....1.2 Maximum

How To Order


CHF 190104 C B F 500 L

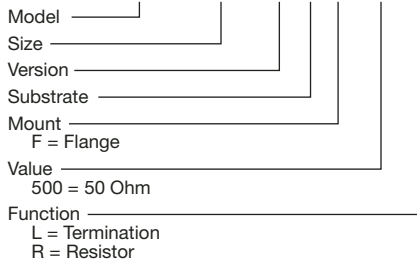

Characteristic Curve

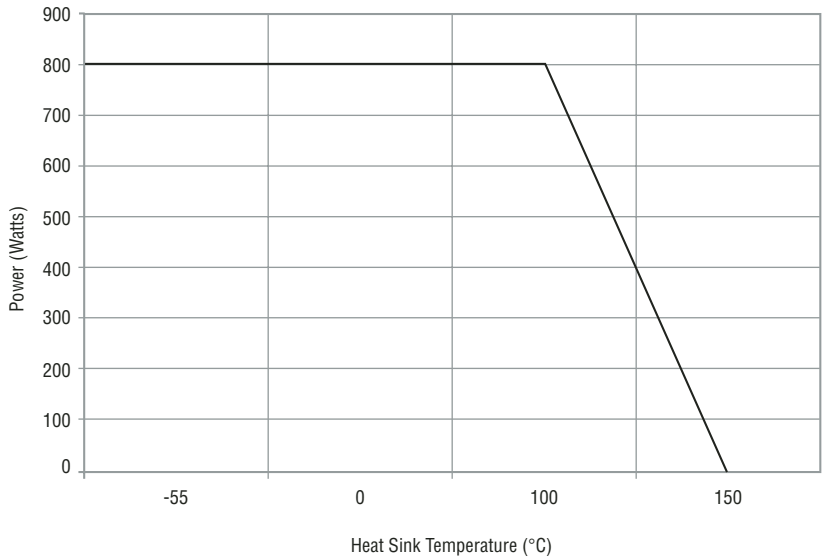

Product Dimensions

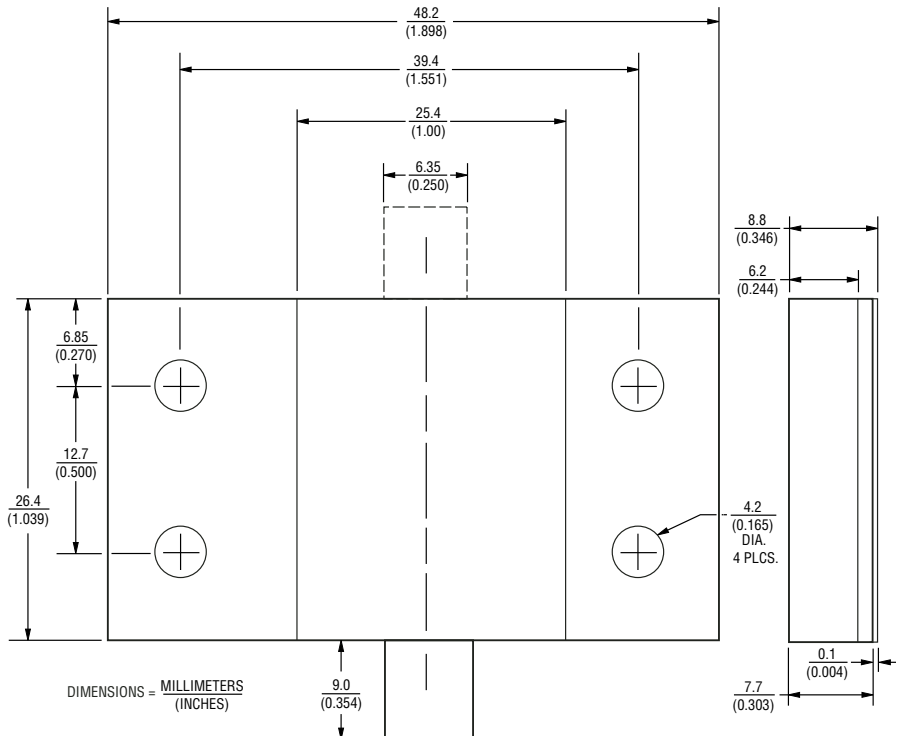

Reliable Electronic Solutions

Asia-Pacific:
 Tel: +886-2 2562-4117
 Fax: +886-2 2562-4116

Europe:
 Tel: +41-41 768 5555
 Fax: +41-41 768 5510

The Americas:
 Tel: +1-951 781-5500
 Fax: +1-951 781-5700

www.bourns.com

*RoHS Directive 2002/95/EC Jan 27 2003, including Annex
 Specifications are subject to change without notice.
 Customers should verify actual device performance in their specific applications.