



DC COMPONENTS CO., LTD.
DISCRETE SEMICONDUCTORS

DCR03B
THRU
DCR03F

TECHNICAL SPECIFICATIONS OF SENSITIVE GATE SILICON CONTROLLED RECTIFIERS
VOLTAGE RANGE - 200 to 600 Volts CURRENT - 0.3 Ampere

Description


- * Driven directly with IC and MOS device
- * Feature proprietary, void-free glass passivated chips
- * Available in voltage ratings from 200 to 600 volts
- * Sensitive gate trigger current
- * Designed for high volume, line-powered control application in relay lamp drivers, small motor controls, gate drivers for large thyristors

Pinning

1 = Gate, 2 = Anode, 3 = Cathode

Absolute Maximum Ratings (T_A=25°C)

Characteristic	Symbol	Rating	Unit
Peak Repetitive Off-State Voltage and Reverse Voltage	DCR03B DCR03D DCR03F V _{DRM} , V _{RRM}	200 400 600	V
On-State Average Current (T _A =30°C, 180° Conduction Angles)	I _{T(AV)}	0.3	A
On-State RMS Current (T _A =30°C, 180° Conduction Angles)	I _{T(RMS)}	0.47	A
Peak Non-repetitive Surge Current (1/2 Cycle, Sine Wave 60Hz)	I _{TSM}	8	A
Forward Peak Gate Current	I _{GM}	0.1	A
Forward Peak Gate Power Dissipation	P _{GM}	0.1	W
Forward Average Gate Power Dissipation	P _{G(AV)}	0.01	W
Operating Junction Temperature	T _J	-40 to +110	°C
Storage Temperature	T _{STG}	-40 to +150	°C

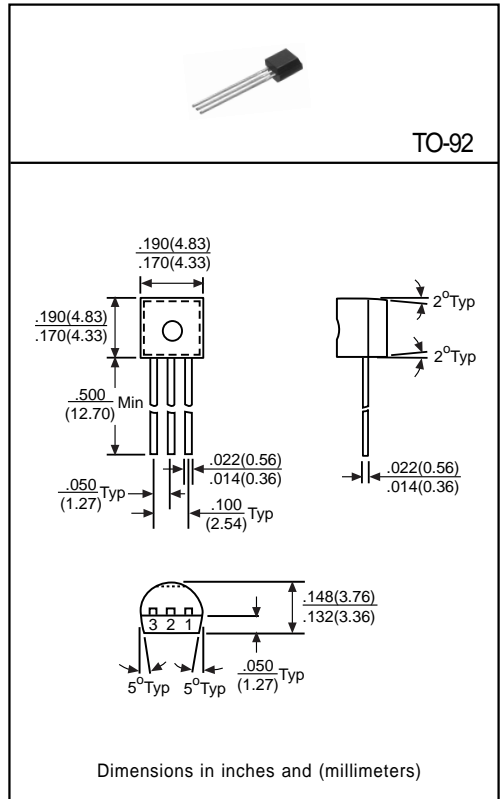

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Peak Repetitive Forward or Reverse Off-State Blocking Current	I _{DRM} , I _{RRM}	-	-	10	μA	V _{AK} =Rated V _{DRM} or V _{RRM} R _{GK} =1KΩ
		-	-	100		
Peak Forward On-State Voltage	V _{TM}	-	-	1.7	V	I _{TM} =0.3A Peak
Continuous DC Gate Trigger Current	I _{GT}	-	-	200	μA	V _{AK} =7V DC, R _L =100Ω
Continuous DC Gate Trigger Voltage	V _{GT}	-	-	0.8	V	V _{AK} =7V DC, R _L =100Ω
DC Holding Current	I _H	-	-	5.0	mA	R _{GK} =1KΩ
Critical Rate-of-Rise of Off-State Voltage	dv/dt	-	5.0	-	V/μS	R _{GK} =1KΩ
Gate Controlled Turn-on Time (t ₀ +t _{tr})	T _{gt}	-	2.2	-	μsec	I _{GT} =10mA
Thermal Resistance, Junction to Case	R _{θJC}	-	75	-	°C/W	-