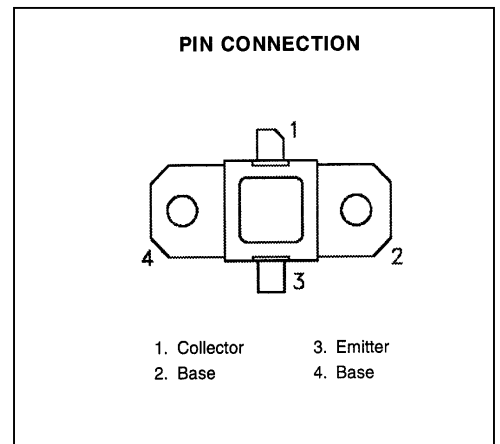
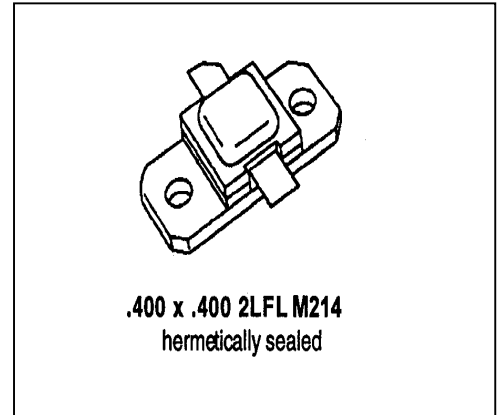


MS2604
**RF & MICROWAVE TRANSISTORS
S BAND RADAR APPLICATIONS**
Features

- 2.7 – 3.1 GHz
- 40 VOLTS
- P_{OUT} = 25 WATTS
- G_p = 6.2 dB MINIMUM
- GOLD METALLIZATION
- INPUT/OUTPUT MATCHING
- COMMON BASE CONFIGURATION


DESCRIPTION:

The MS2604 is a silicon NPN bipolar transistor designed for pulsed S-Band radar applications.

The MS2604 is capable of operation over a wide range of pulse widths and duty cycles. Internal impedance matching and gold metalization provide consistent broadband performance and long term reliability.

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C)

Symbol	Parameter	Value	Unit
V _{CC}	Collector Supply Voltage	46	V
I _C	Device Current	4	A
P _{DISS}	Power Dissipation	100	W
T _J	Junction Temperature	200	°C
T _{STG}	Storage Temperature	-65 to +200	°C

Thermal Data

R _{TH(J-C)}	Junction - Case Thermal Resistance	2.0	°C/W
----------------------	------------------------------------	-----	------

**ELECTRICAL SPECIFICATIONS (T_{case} = 25°C)
STATIC**

Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
BV _{CBO}	I _C = 15 mA	I _E = 0 mA	55	---	---	V
BV _{EBO}	I _E = 2 mA	I _C = 0 mA	3.5	---	---	V
BV _{CER}	I _C = 15 mA	R _{BE} = 10 Ω	55	---	---	V
I _{CES}	V _{CE} = 40 V		---	---	10	mA
HFE	V _{CE} = 5.0 V	I _C = 1.5 A	30	---	150	---

DYNAMIC

Symbol	Test Conditions			Value			Unit
				Min.	Typ.	Max.	
P _{OUT}	f = 2700 - 3100 MHz	P _{IN} = 6.0 W	V _{CC} = 40V	25	---	---	W
η _c	f = 2700 - 3100 MHz	P _{IN} = 6.0 W	V _{CC} = 40V	30	---	---	%
G _{PE}	f = 2700 - 3100 MHz	P _{IN} = 6.0 W	V _{CC} = 40V	6.2	---	---	dB
Conditions	Pulse Width = 100 μsec Duty Cycle = 10%						


IMPEDANCE DATA

Freq	Z _{IN} (Ω)	Z _{CL} (Ω)
2.7 GHz	12.0 + j3.0	15.0 - j4.0
2.9 GHz	6.5 + j0.0	15.5 - j3.0
3.1 GHz	5.0 - j3.0	11.0 - j3.0

P_{IN} = 6 W
V_{CC} = 40 V

PACKAGE MECHANICAL DATA

PACKAGE STYLE M214

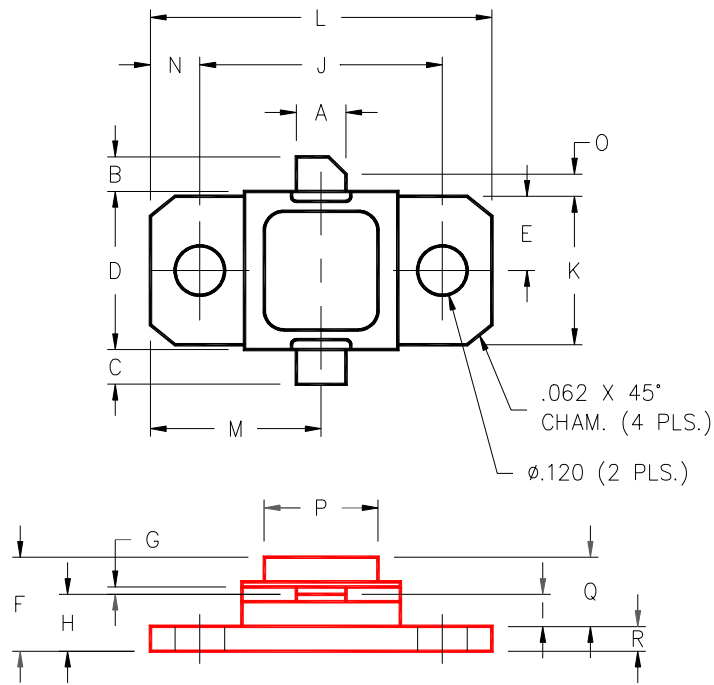

	MINIMUM INCHES/MM	MAXIMUM INCHES/MM		MINIMUM INCHES/MM	MAXIMUM INCHES/MM
A	.140/3,56		J	.650/16,51	
B	.110/2,80		K	.386/9,80	
C	.110/2,80		L	.900/22,86	
D	.395/10,03	.407/10,34	M	.450/11,43	
E	.193/4,90		N	.125/3,18	
F		.230/5,84	O	.050/1,27	
G	.003/0,08	.006/0,15	P	.405/10,29	
H	.118/3,00	.131/3,33	Q	.170/4,32	
I	.063/1,60		R	.062/1,58	