




**PHASE NOISE (1 Hz BW. typical)**

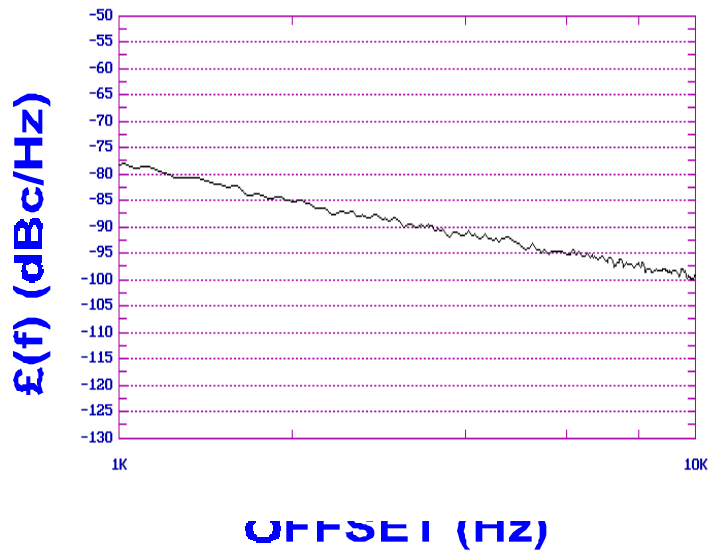

**FEATURES**

- Frequency Range: 1404 - 1439 MHz
- Tuning Voltage: 0.4-2.8 Vdc
- 375 - Style Package

**APPLICATIONS**

- Satellite Handheld Phones
- Portable Radios
- Earthstations

**PERFORMANCE SPECIFICATIONS**

	VALUE	UNITS
Oscillation Frequency Range	1404 - 1439	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-100	dBc/Hz
Harmonic Suppression (2nd, typ.)	-19	dBc
Tuning Voltage	0.4-2.8	Vdc
Tuning Sensitivity (avg.)	48	MHz/V
Power Output	-2±2.5	dBm
Load Impedance	50	$\Omega$
Input Capacitance (max.)	50	pF
Pushing	<5	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<5	MHz
Operating Temperature Range	-25 to 75	$^{\circ}\text{C}$
Package Style	375	

**POWER SUPPLY REQUIREMENTS**

Supply Voltage (Vcc, nom.)	3	Vdc
Supply Current (Icc, typ.)	9	mA


All specifications are typical unless otherwise noted and subject to change without notice.

**APPLICATION NOTES**


- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

**NOTES:**


**TUNING CURVE, typ.**

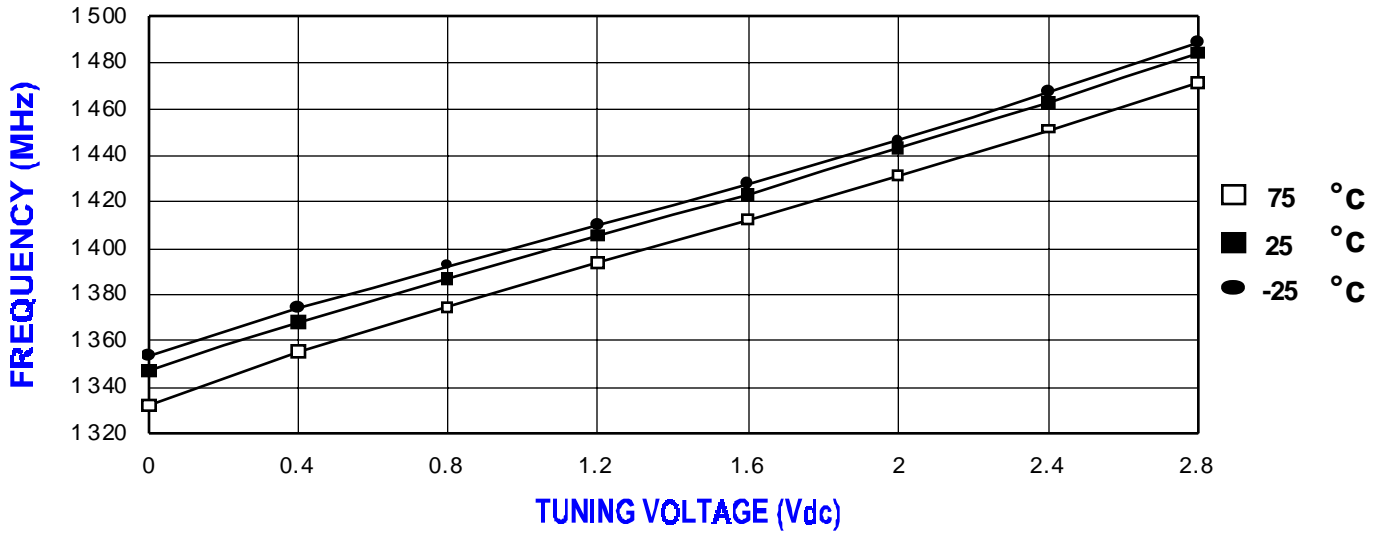

**POWER CURVE, typ.**

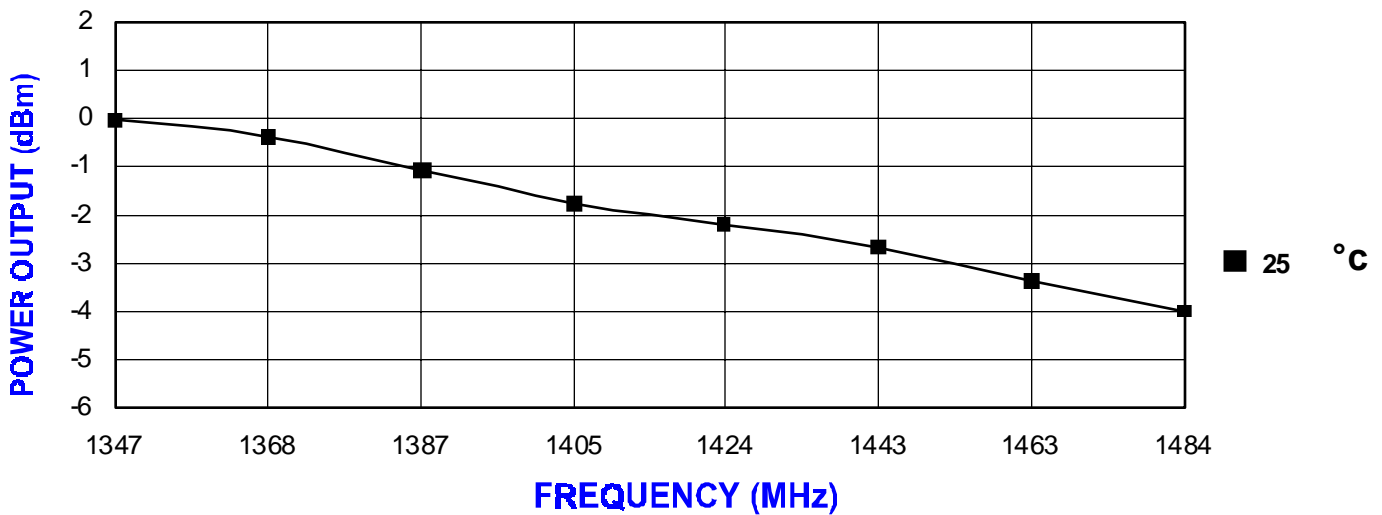

**PHYSICAL DIMENSIONS**

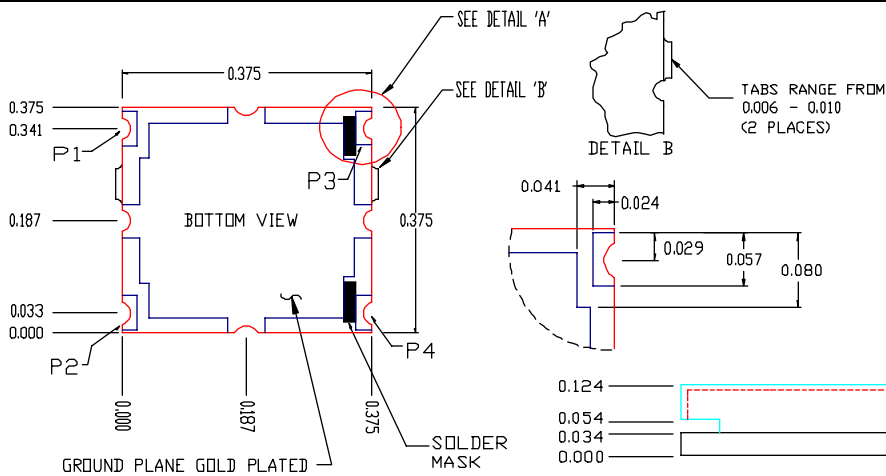

**NOTES:**

1. THE INSIDE RADIUS OF ALL 8 HALF HOLES AT THE PERIMETER OF THE BOARD ARE GOLD PLATED TO PROVIDE A SURFACE FOR THE ATTACHMENT OF THE VCO TO A MOTHERBOARD, IN 8 LOCATIONS, WITH 4 PADS BEING USED FOR ELECTROMECHANICAL INTERFACE. 8 SOLDER LOCATIONS REQUIRED.
2. THE SURFACE OF THE SHIELD IS TIN PLATED AND MAY BE SOLDERED TO THE SHIELD'S BASE METAL IS BRASS.
3. THE GROUND PLANE IS GROUND AND ATTACHES TO A GROUND TRACK ON THE UPPER SIDE OF THE BOARD AS WELL AS THE SHIELD BY PTH.
4. UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE IN INCHES.
5. UNLESS OTHERWISE NOTED ALL TOLERANCES ARE AS FOLLOWS:  
TOLERANCES  
.XXX = ± .010

TERMINAL PADS	
P1	= V <sub>mod</sub> (OpT)
P2	= RF Out
P3	= V <sub>Tune</sub>
P4	= V <sub>cc</sub>