


# SAW Bandpass Filter 201150B



## 1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

## 2. Package Dimension

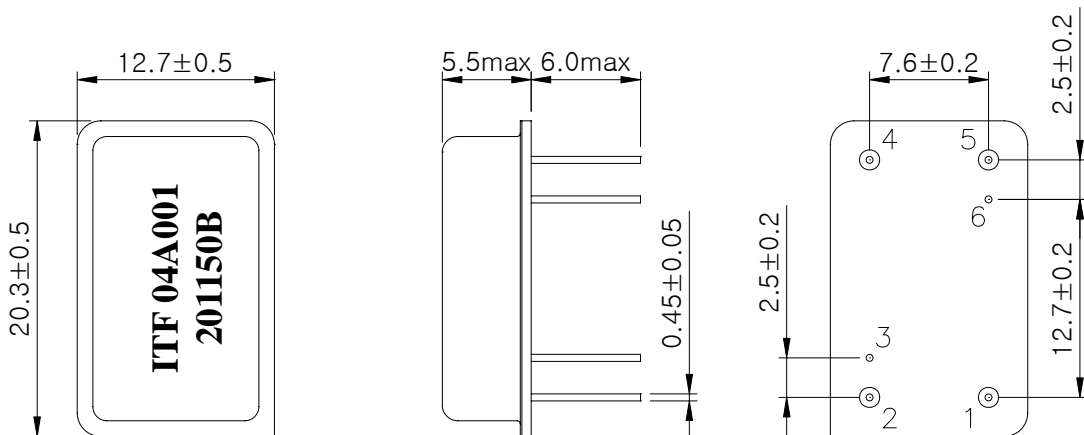

### Package : D2012


Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

| Pin Configuration |             |
|-------------------|-------------|
| 1                 | Input       |
| 5                 | Output      |
| 2, 4              | Ground      |
| 3, 6              | Case ground |

|   |   |           |             |     |
|---|---|-----------|-------------|-----|
|  | <b>ITF Co., Ltd.</b><br>102-901, Bucheon Technopark 364,<br>Samjeong-Dong, Ojeong-Gu, Bucheon-City,<br>Gyeonggi-Do, Korea 421-809 | Part No.  | 201150B     |     |
|   |   | Rev. Date | 2004-06-22  |     |
|   |   | Rev.      | NI2038-CS02 | 1/5 |

# SAW Bandpass Filter 201150B



## 3. Specifications

Fo = 70.0 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

|  |        | Minimum | Typical | Maximum |
|--|--------|---------|---------|---------|
| Center Frequency                       | MHz    | 69.94   | 70.0    | 70.06   |
| Insertion Loss                         | dB     | -       | 22.0    | 25.0    |
| 1dB Bandwidth                          | MHz    | -       | 17.6    | -       |
| 3dB Bandwidth                          | MHz    | 17.8    | 18.2    | -       |
| 40dB Bandwidth                         | MHz    | -       | 20.9    | 21.5    |
| Amplitude Ripple (Fo +/- 8.0 MHz)      | dB     | -       | 0.7     | 1.0     |
| Group Delay Variation (Fo +/- 8.0 MHz) | nsec   | -       | 30      | 150     |
| Absolute Delay                         | usec   | -       | 1.69    | 1.8     |
| Ultimate Rejection                     | dB     | 50      | 55      | -       |
| Temperature Coefficient of Frequency   | ppm/°C | -       | -72     | -       |

### Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


|   |   |           |             |     |
|---|---|-----------|-------------|-----|
| <br>Integrated Technology Future | <b>ITF Co., Ltd.</b><br>102-901, Bucheon Technopark 364,<br>Samjeong-Dong, Ojeong-Gu, Bucheon-City,<br>Gyeonggi-Do, Korea 421-809 | Part No.  | 201150B     |     |
|   |   | Rev. Date | 2004-06-22  |     |
|   |   | Rev.      | NI2038-CS02 | 2/5 |

# SAW Bandpass Filter 201150B



## 4. Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )

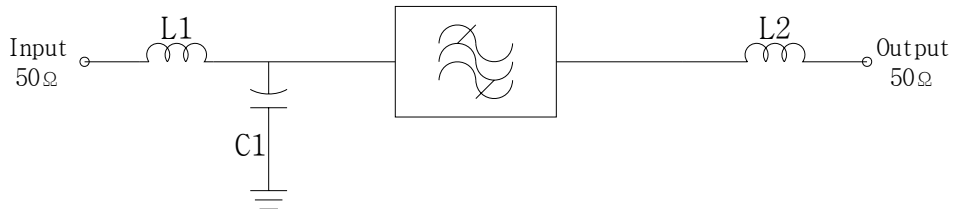

$L1 = L2 = 120 \text{ nH}$

$C1 = 10 \text{ pF}$

## 5. Marking Configuration


ITF<sup>1)</sup> 04A001<sup>2)</sup>

201150B<sup>3)</sup>

1) Manufacturer name

2) Lot Number



3) Part Number

|   |   |           |             |     |
|---|---|-----------|-------------|-----|
| <br>Integrated Technology Future | <b>ITF Co., Ltd.</b><br>102-901, Bucheon Technopark 364,<br>Samjeong-Dong, Ojeong-Gu, Bucheon-City,<br>Gyeonggi-Do, Korea 421-809 | Part No.  | 201150B     |     |
|   |   | Rev. Date | 2004-06-22  |     |
|   |   | Rev.      | NI2038-CS02 | 3/5 |

# SAW Bandpass Filter 201150B



## 6. Typical Performance ( at +25°C )

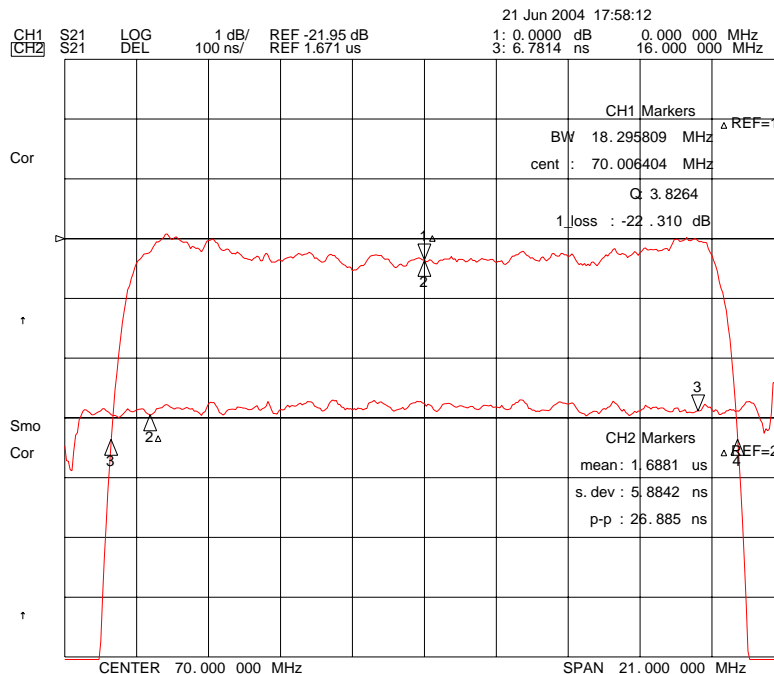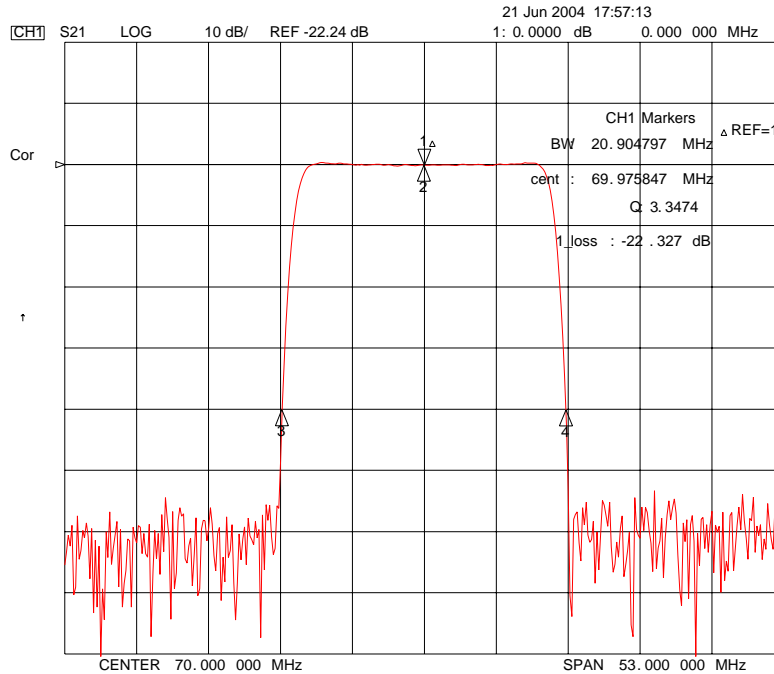





**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

Part No. 201150B

Rev. Date 2004-06-22

Rev. NI2038-CS02 4/5

# SAW Bandpass Filter 201150B

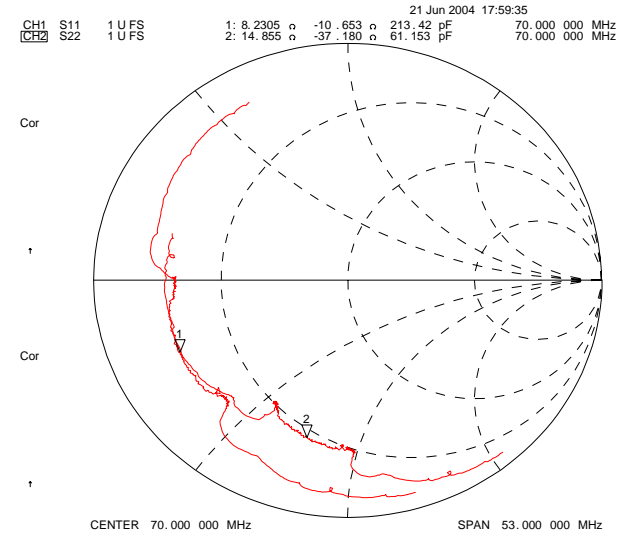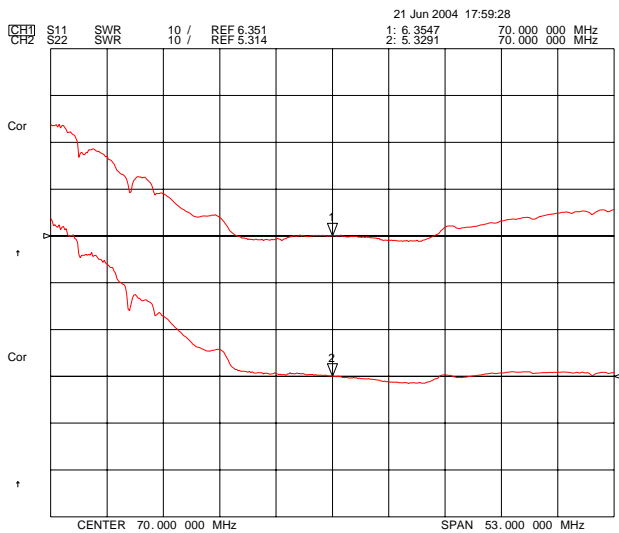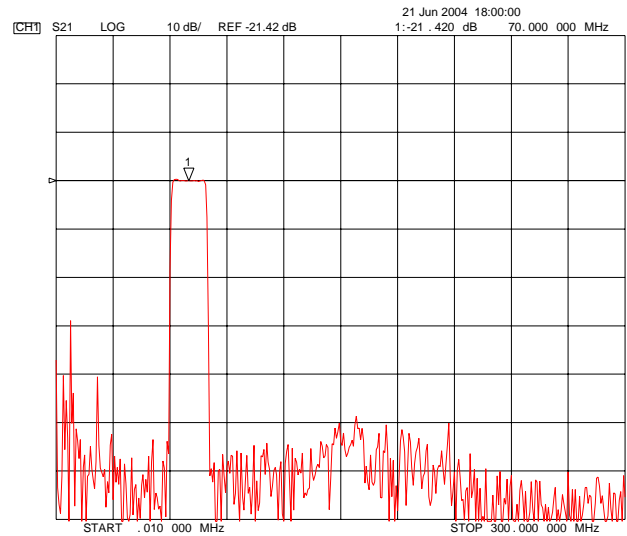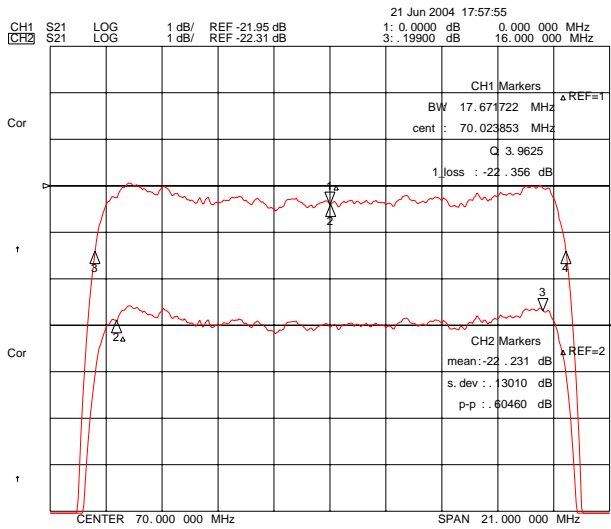

**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

|           |             |     |
|-----------|-------------|-----|
| Part No.  | 201150B     |     |
| Rev. Date | 2004-06-22  |     |
| Rev.      | NI2038-CS02 | 5/5 |