

# AR5000L - AR5012L

**PRV : 50 - 1200 Volts**  
**Io : 50 Amperes**


## FEATURES :

- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* **Pb / RoHS Free**

## MECHANICAL DATA :

- \* Case : molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 2.049 grams

## AUTOMOTIVE RECTIFIER DIODES

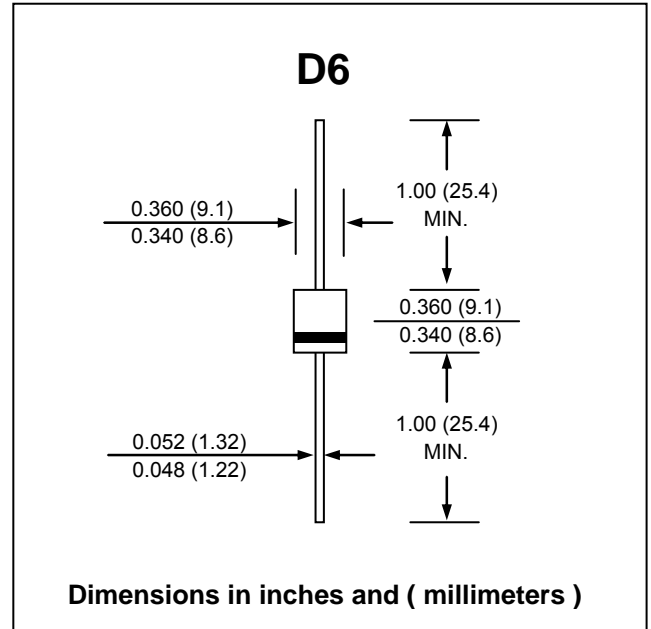

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.


For capacitive load, derate current by 20%.

RATING	SYMBOL	AR 5000L	AR 5001L	AR 5002L	AR 5004L	AR 5006L	AR 5008L	AR 5010L	AR 5012L	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	1200	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	840	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	1200	V
Average Rectified Forward Current $T_c = 150\text{ }^\circ\text{C}$	$I_{F(AV)}$	50								A
Peak Forward Surge Current Single half sine wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	500								A
Maximum Forward Voltage at $I_F = 50$ Amps.	$V_F$	1.1								V
Maximum DC Reverse Current $T_a = 25\text{ }^\circ\text{C}$ at rated DC Blocking Voltage $T_a = 100\text{ }^\circ\text{C}$	$I_R$	5.0								$\mu\text{A}$
	$I_{R(H)}$	1.0								mA
Thermal Resistance (Note 1)	$R_{\theta JC}$	0.8								$^\circ\text{C/W}$
Junction Temperature Range	$T_J$	- 65 to + 175								$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	- 65 to + 175								$^\circ\text{C}$


Note : (1) Thermal resistance from junction to case. Single side cooled.

## RATING AND CHARACTERISTIC CURVES ( AR5000L - AR5012L )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

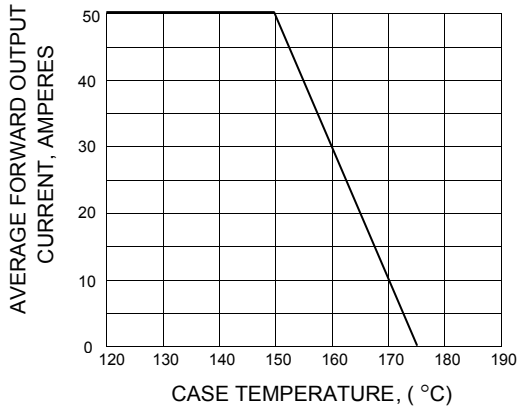

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

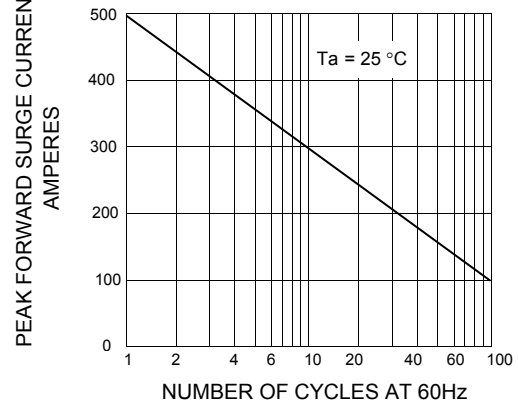

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

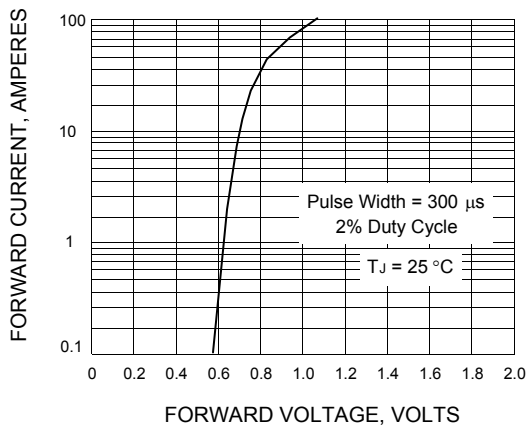

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

