




ISOLATION TRANSFORMERS FOR 10BASE-T APPLICATIONS

For Adapter Cards, Hubs and Motherboards



-  Designed to meet or exceed IEEE802.3, 10Base-T specifications
-  Peak solder reflow Temperature rating per Table 5-2 defined in IPC/JEDEC J-STD-020C
-  Available with Common Mode Choke options for EMI suppression


Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

Part Number ^{1,2}	Turns Ratio		Primary Pins TX/RX	Common Mode Choke	Inductance Primary (μH)	Interwinding Capacitance (pfMAX)	Leakage Inductance (μH MAX)	Winding Resistance (MAX)	Vrms
	Transmit	Receive							
E2452NL	1CT:1CT	1CT:1CT	1-3/6-8	None	140/140	12	0.3	0.3	1500
E2454NL	1CT:2CT	1CT:1CT	1-3/6-8	TX only	50/200	12	0.3	1.0	1500
E2457NL	1CT:1.41CT	1CT:1CT	6-8/1-3	None	140/140	12	0.2	0.3	1500
E2458NL	1CT:1.41CT	1CT:1CT	6-8/1-3	Shared	160/160	12	0.4	0.3	1500
E2466NL	1CT:2CT	1CT:1CT	6-8/1-3	None	20/100	12	0.3	0.6	1500
E2467NL	1CT:2CT	1CT:1CT	6-8/1-3	Shared	20/100	12	0.3	0.6	1500


1. All above parts Moisture Sensitivity Level (MSL) = 1
2. All parts are supplied in Tubes but Tape & Reel options can be requested by adding "T" to the end of the part code, eg. E2457NLT will be the Tape & Reel version of E2457NL.

Schematics


E24XXNL



Part without Choke



Part with TX Choke

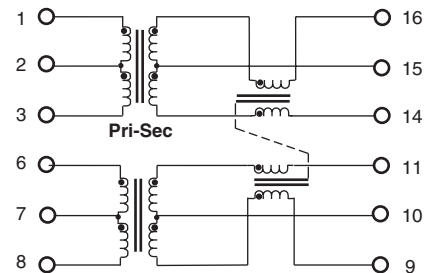

Part including Shared Choke

ISOLATION TRANSFORMERS FOR 10BASE-T APPLICATIONS


For Adapter Cards, Hubs and Motherboards



Pulse
A TECHNITROL COMPANY

Mechanical

E24XXNL

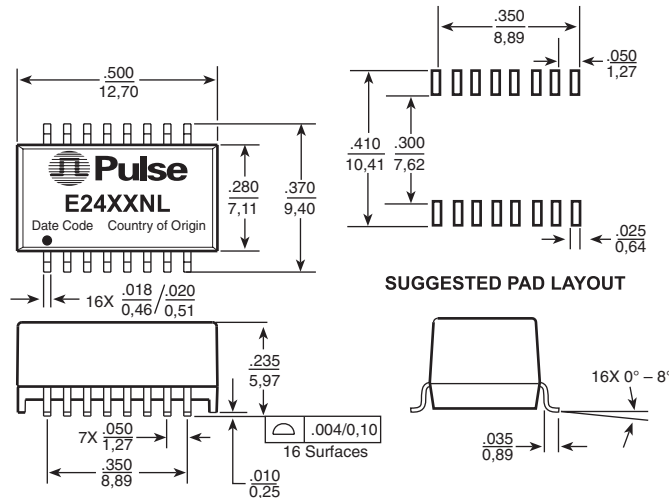

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified
all tolerances are $\pm \frac{.010}{0,25}$

Weight0.85 grams
Tape & Reel40/reel
Tube600/tube

Cross Reference to Old Pulse Products

New RoHS Part Number	Replaces Old Part Number
E2452NL	23Z114SMNL PE-65726NL
E2454NL	PE-68023NL ST4160TNL
E2457NL	23Z128SMNL PE-65745NL ST7011NL & ST7011TNL
E2458NL	23Z356SMNL PE-68048NL ST7010NL & ST7010TNL
E2466NL	23Z466SMNL PE-68041NL
E2467NL	23Z467SMNL E4001NL ST4202NL & ST4202TNL

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA 92128
U.S.A.

www.pulseeng.com

TEL: 858 674 8100

FAX: 858 674 8262

Pulse Northern Europe

3 Huxley Road
Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom

TEL: 44 1483 401700

FAX: 44 1483 401701

Pulse Southern Europe

Zone Industrielle
F-39270
Orgelet
France

TEL: 33 3 84 35 04 04

FAX: 33 3 84 25 46 41

Pulse China Headquarters

No. 1
Industrial District
Changan, Dongguan
China

TEL: 86 769 5538070

FAX: 86 769 5538870

Pulse North China

Room 1002
No. 819
Nanjing West Rd
Shanghai
China

TEL: 86 21 32181071

FAX: 86 21 32181396

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

TEL: 65 6287 8998

FAX: 65 6280 0080

Pulse North Asia

3F-4, No. 81, Sec. 1
Hsin Tai Wu Road
Hsi-Chih
Taipei Hsien
Taiwan

TEL: 886 2 26980228

FAX: 886 2 26980948

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All right reserved.