


- Miniature 11.4 x 9.6 x 2.5mm SMD package
- Wide frequency range: 1.25MHz to 156.0MHz
- Supply voltage 2.8, 3.0, 3.3 or 5.0 Volts
- Frequency stability from  $\pm 1$ ppm over -30 to +75°C
- RoHS compliant

## HCMOS, 4 pad SMD, MHz Range



### DESCRIPTION

EM42GT series TCXOs are packaged in a miniature 4 pad ceramic SMD package. With squarewave (CMOS) output, tolerances are available from  $\pm 1.0$ ppm over -30° to +75°C. The part has a 0.01 $\mu$ F decoupling capacitor built in.

### SPECIFICATION

Product Series Code	TCXO: EM42GT	VCTCXO: VEM42GT
Frequency Range:	1.25MHz to 156.0MHz	
Output Waveform:	Squarewave, HCMOS	
Initial Calibration Tolerance:	$< \pm 12.0$ ppm at +25° $\pm 2^\circ$ C	
Standard Frequencies:	10.0, 12.8, 13.0, 14.4, 15.36, 16.384, 19.2, 19.440, 19.68, 25.0, 20.0, 27.0, 38.880, 40.0, 77.760, 125.0, 155.520 (Partial list)	
Operating Temperature Range:	See table	
Frequency Stability		
vs. Ageing:	$\pm 1.0$ ppm max. first year	
vs. Voltage Change:	$\pm 0.3$ ppm max. $\pm 5\%$ change	
vs. Load Change:	$\pm 0.3$ ppm max. $\pm 10\%$ change	
vs. Reflow (SMD type):	$\pm 1.0$ ppm max. for one reflow (Measured after 24 hours)	
Mechanical Frequency Tuning:	$\pm 3$ ppm minimum	
Supply Voltage:	+2.8, +3.0, +3.3 or +5.0V (See table)	
Output Logic Levels:	Logic High: 90% Vdd min. Logic Low: 10% Vdd max.	
Rise and Fall Times:	10ns max.	
Duty Cycle:	50% $\pm 10\%$ standard, 50% $\pm 5\%$ option	
Start-up Time:	5ms typical, 10ms max.	
Current Consumption:	See table below	
Output Load:	15pF	
Storage Temperature:	-55~+125°C	

### FREQUENCY STABILITY


Frequency Stability (ppm)		$\pm 0.5$	$\pm 1.0$	$\pm 1.5$	$\pm 2.0$	$\pm 2.5$
Temperature Range (°C)	0 ~ +50	ASK	✓	✓	✓	✓
	-10 ~ +60	x	✓	✓	✓	✓
	-20 ~ +70	x	x	✓	✓	✓
	-30 ~ +75	x	x	x	✓	✓
	-40 ~ +85	x	x	x	x	✓

✓ = available, x = not available, ASK = call Technical Sales

### VEM42GT VOLTAGE CONTROL SPECIFICATION

Control Voltage:	Standard = +1.5 $\pm 1.0$ Volts for all input voltages. (Contact technical sales if +2.5 $\pm 2.0$ Volts is required.)
Frequency Deviation:	$\pm 6.0$ ppm min. (Vcon = +4.5V $\pm 1.0$ V)
Slope Polarity:	Positive (increase of control voltage increases output frequency.)
Input Impedance:	50k $\Omega$ minimum
Modulation Bandwidth:	20kHz minimum
Linearity:	$\pm 10\%$ maximum

### EM42GT - OUTLINES AND DIMENSIONS

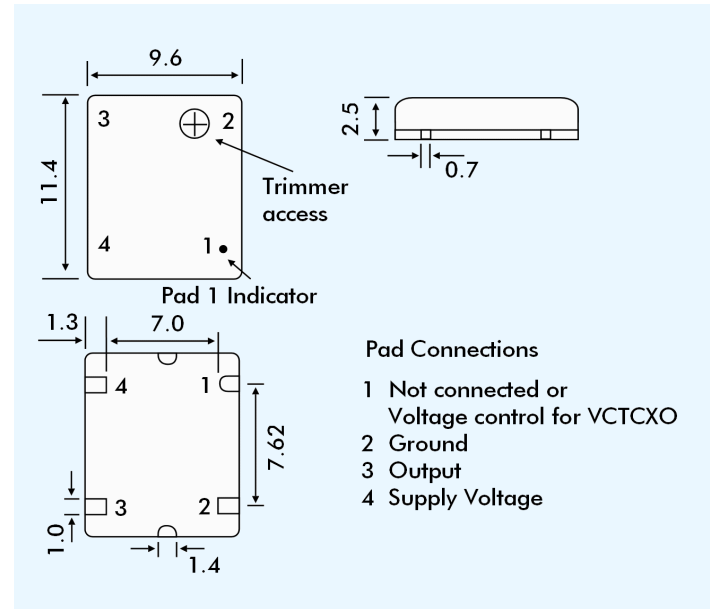

### INPUT VOLTAGE & CURRENT CONSUMPTION

Input Voltage/ Frequency	+2.8V	+3.0	+3.3V	+5.0 V
8.192MHz	2mA	2mA	5mA	
10.0MHz	3mA	4mA	7mA	
77.760MHz	14mA	17mA	32mA	
155.520MHz	26mA	35mA	50mA	

### SSB PHASE NOISE at 25°C

Offset		10Hz	100Hz	1kHz	10kHz	100kHz
Part = M42GT33	at 10.0MHz (dBc/Hz)	-115	-135	-148	-152	-155
	at 155.250MHz (dBc/Hz)	-72	-110	-125	-132	-125

### PART NUMBERING PROCEDURE

Example: **EM42GT33-38.880-2.5/-30+75**

Series Description: EM42GT  
 TCXO = EM42GT  
 VCTCXO = VEM42GT

Supply Voltage:  
 28 = 2.8VDC  
 3 = 3.0VDC  
 33 = 3.3 VDC  
 5 = 5.0 VDC

Frequency (MHz): 38.880  
 Stability over OTR ( $\pm$ ppm): 2.5  
 Operating Temperature Range (OTR) (°C): -30 to +75  
 Lower and upper limits.