


- Operating Temperature : -40°C to +85°C
- Complies with or exceeds IEEE 802.3, 10Base-T Requirements


Electrical Parameters @ 25° C

OCL (μ H Min.)	Interwinding Capacitance (pF Max.)	Leakage Inductance (μ H Max.)	Hipot (Vrms)	Primary DCR (Max.)
100 KHz, 100 mVrms	@ 100 KHz, 100 mVrms	@ 100 KHz, 100 mVrms	60-80	
150	12	0.20	1500	0.35

Schematic



Package

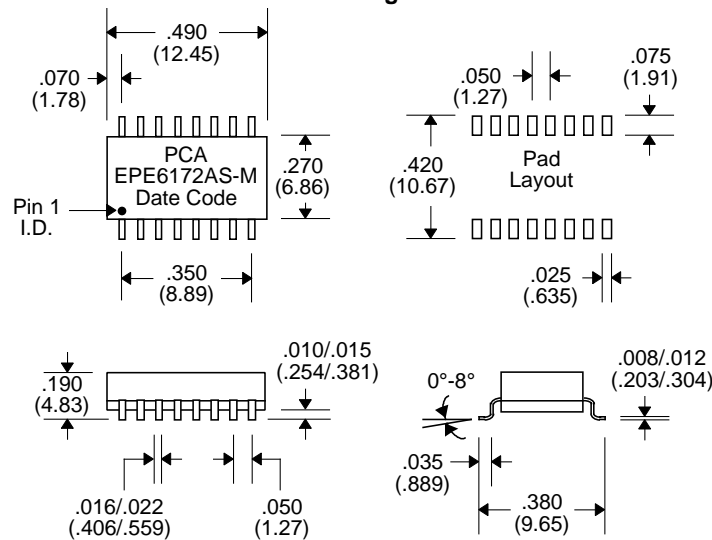

Unless Otherwise Specified Dimensions are in Inches /mm \pm .010 / .25