

HiTRON

UNIVERSAL INPUT AC-DC OPEN FRAME SINGLE & MULTI-OUTPUT 40-50 WATTS INTERNAL SWITCHING POWER SUPPLIES HVI48 SERIES



FEATURES:

- ACCOMMODATE UNIVERSAL AC SOURCES
- SMALL, COMPACT PCB OR BOX FORMAT
- MEET UNIVERSAL SAFETY STANDARDS
- EMI MEET CISPR PUB. 22 & FCC CLASS B
- CE MARKING COMPLIANCE

SPECIFICATION

INPUT SPECIFICATION

Input Voltage: Range 90-264Vac.

Rating 100 to 240Vac.

Input Connector: PCB Format Molex 5273(vertical).

Box Format IEC320 AC inlet receptacle
with on/off switch.

Input Frequency: 47-63Hz.

Inrush Current: $\leq 30.6A$ peak @230Vac.

Input Current: Typ. 1.32A @115Vac, 0.65A @230Vac.

Dielectric Withstand: Meet IEC 60950-1.

EMI: Meet CISPR PUB. 22 & FCC Class B.

Hold-up Time: Typ. 10mS @115Vac, 50mS @230Vac.

Earth Leakage: Less than 0.3mA @230Vac.

OUTPUT SPECIFICATION

Output Voltage: See Ratings Chart.

Output Current: See Ratings Chart.

Output Connector: PCB Format Molex 5273(vertical).
Box Format Optional for output cord.

Output Wattage: With fan cooling typ. 50 Watts.
Without fan cooling 40 Watts.

Line Regulation: Typ. 0.1%.

Load Regulation: Main VO1 typ. $\pm 1.0\%$.
Aux. VO2 typ. $\pm 2-5\%$ (stacked).
VO3 typ. $\pm 1-3\%$ (P.R.).
VO4 typ. $\pm 5-8\%$ (semi-regulated).

Noise & Ripple: Typ. 1.0% peak to peak.

OVP: Built-in at main VO1.

Adjustability: Available at main VO1.

Remote Sense: Option for VO1.

Overload Protection (OLP):

Fully protected against output overload and short circuit.
OLP set at about 125-150% rating output wattage.
Consult the factory for OLP setting.

GENERAL SPECIFICATION

Efficiency: Typ. 75%.

Switching Frequency: Fixed frequency 38K Hz.

Circuit Topology: Fixed frequency flyback circuit.

Transient Response: Output voltage returns in less than
3mS following a 25% load change.

Safety Standard: UL 60950-1/EN 60950-1 Class I.

Power Density: 2.7 Watts / Cubic Inch (PCB Format).

Operating Temperature: 0 to +50°C.

Storage Temperature: -20 to +85°C.

Temperature Coefficient: Typ. 0.03%/°C.

Cooling: Free air convection for 40W.
20cfm fan cooling for 50W.

Construction: Open frame PCB format or
enclosure metal box format.

Note: Due to requests in market and advances in technology, specifications subject to change without notification.



For the details of safety approval, please consult the factory.

OUTPUT VOLTAGE / CURRENT RATINGS CHART

SINGLE OUTPUT

MODEL NO.	MAIN VO1 @★		
	Typ.	Volt.	Fan
HVI48-S033080	8.0A	3.3V	10.0A
HVI48-10	7.0A	5.0V	9.0A
HVI48-10B	6.0A	5.0V	8.0A
HVI48-11	3.3A	12.0V	4.0A
HVI48-12	2.7A	15.0V	3.4A
HVI48-13	1.8A	24.0V	2.1A
HVI48-S480010	1.0A	48.0V	1.2A

DUAL OUTPUT

MODEL NO.	MAIN VO1 @★			AUX.+VO2 †or-VO3•		
	Typ.	Volt.	Fan	Typ.	Volt.	Fan
HVI48-20	6.0A	+5V	7.0A	0.5A	-5V	1.0A
HVI48-21	4.0A	+5V	5.0A	1.5A	+12V	1.7A
HVI48-22	4.0A	+5V	5.0A	1.2A	+15V	1.3A
HVI48-23	4.0A	+5V	5.0A	0.8A	+24V	0.9A

TRIPLE OUTPUT

MODEL NO.	MAIN VO1@★			AUX. VO2 †			AUX. VO3 •		
	Typ.	Volt.	Fan	Typ.	Volt.	Fan	Typ.	Volt.	Fan
HVI48-30	3.5A	+5V	4.0A	1.5A	+12V	2.0A	0.4A	-12V	0.4A
HVI48-31	3.5A	+5V	4.0A	1.5A	+12V	2.0A	0.5A	-5V	0.4A
HVI48-32	3.5A	+5V	4.0A	0.8A	+24V	1.0A	0.4A	-12V	0.4A
HVI48-33	3.5A	+5V	4.0A	1.2A	+15V	1.4A	0.4A	-15V	0.4A

QUAD OUTPUT

MODEL NO.	MAIN VO1@★		AUX. VO2 †		AUX. VO3		AUX. VO4	
	Typ.	Volt.	Typ.	Volt.	Typ.	Volt.	Typ.	Volt.
HVI48-49	2.2A	3.3V	0.8A	5.1V	1.2A	-23V	0.13A	-57V
HVI48-Q033EMS	2.2A	3.3V	0.8A	5.0V	1.2A	-24V	0.13A	-72V
HVI48-Q033EMQ	2.5A	3.3V	0.8A	5.0V	1.2A	-24V	0.15A	-48V

Symbol: "★" OVP built-in. "@" Adjustable. "†" Stacked on main O/P. "•" Installed with Post Regulator (P.R.).


Remark:(1) At least 20% of typical main output current is required to maintain stated regulation.

(2) FAN: Installed with 20 CFM FAN cooling.


MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: PCB 262.0g (9.24 Oz.)

BOX 616.0g (21.7 Oz.)

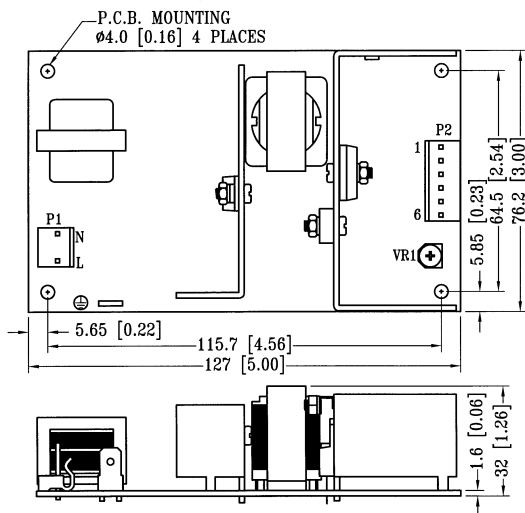

PCB FORMAT

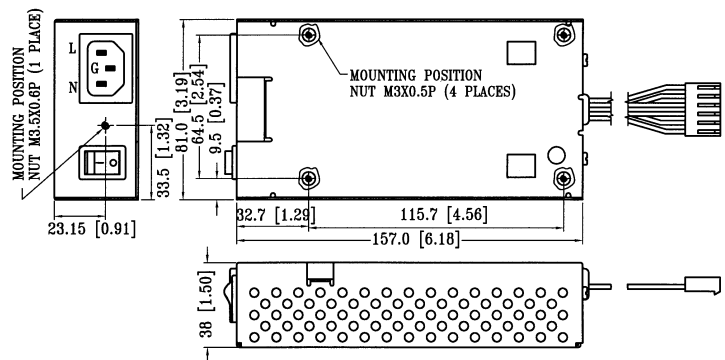

BOX FORMAT

INPUT & OUTPUT CONNECTORS PIN ASSIGNMENT FOR PCB VERSION

ASSIGNMENT	AC INPUT			SINGLE O/P		DUAL O/P			TRIPLE O/P			
	AC-LINE	AC-NEUTRAL	AC-GROUND	+VO1	DC COM	+VO1	VO2	DC COM	+VO1	VO2	-VO3	DC COM
CONNECTOR & PIN #	P1-L	P1-N	FASTON	P2-1,2,3	P2-4,5,6	P2-2,3	P2-1	P2-4,5,6	P2-2,3,	P2-1	P2-6	P2-4,5

Mating connector: Molex 5195 or 5239 series.