
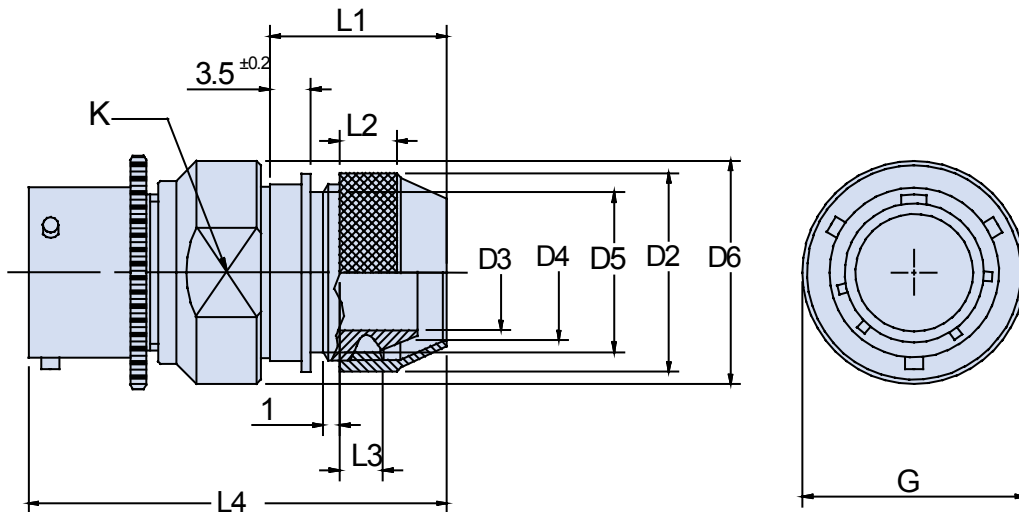


IPT 01 MSE In-Line Receptacle Connector with Backshell for EMI Shield Termination and Shrink Boot

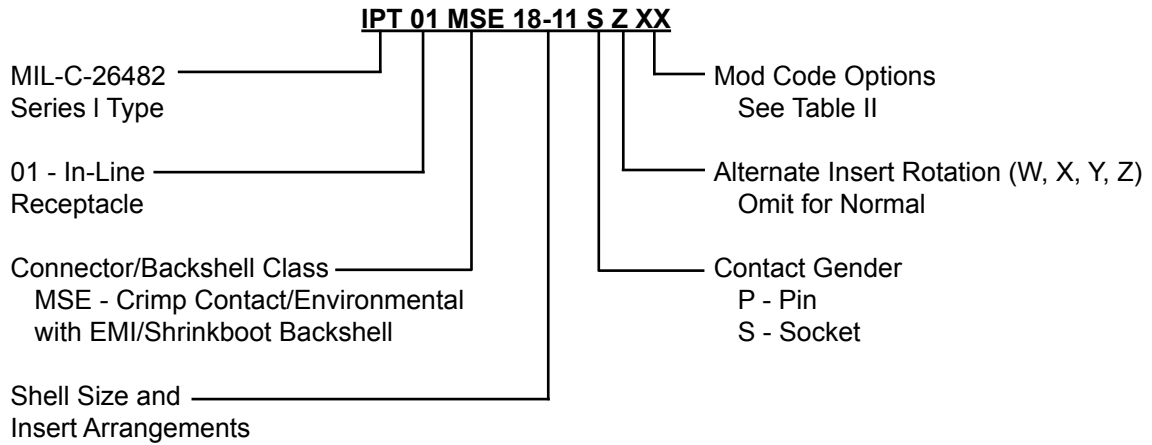

APPLICATION NOTES

1. In-line receptacle with backshell for terminating EMI shielding and attaching heat shrink boots.
2. Connector/Backshell Class "MSE" (crimp contact/environmental)—Wire sealing grommet supplied.
3. Standard materials configuration consists of aluminum alloy with stainless steel coupling pins.
4. Standard contact material consists of copper alloy with gold plating over nickel.
5. A broad range of other front and rear connector accessories are available. See our website and/or contact factory for complete information.
6. Standard insert is high insulation synthetic rubber.

IPT 01 MSE
In-Line Receptacle Connector
with Backshell for
EMI Shield Termination and Shrink Boot



IPT SE Series
 Bayonet Lock
 Connectors

TABLE I: DIMENSIONS

| Shell size | K Key | G ± 0.1 | L4 Max. | Maximum Weight in Grams |
|------------|-------|------------|------------|-------------------------------|
| 8 | 18 | 17.3 | 54 | 26 |
| 10 | 21 | 21.8 | 54 | 32 |
| 12 | 24 | 25.1 | 54 | 38 |
| 14 | 28 | 28.6 | 54 | 44 |
| 16 | 31 | 30.6 | 54 | 49 |
| 18 | 34 | 33.0 | 54 | 60 |
| 20 | 37 | 36.5 | 62 | 70 |
| 22 | 41 | 39.6 | 62 | 73 |
| 24 | 44 | 43.1 | 62 | 87 |

TABLE II: MODIFICATION CODES

| Shell Finish (Omit for Standard Cad/Olive Drab Finish) | Assembly with Accessories (Omit for Standard Version) |
|--|--|
| F2 - Bright Nickel Plating (RoHs) | Key Polarization (Omit for N version) W, X, Y, Z = Alternates |
| F6 - Black Electrodeposited Paint (RoHs) | N0 - Connector Less Backshell |
| F7 - Black Zn-Co Plating (RoHs) | GXXX - Custom Designed Connector |
| F8 - Olive Drab Zn-Co Plating | |

STANDARD FINISHES (For QQ-A-591 Aluminum Shells)

| Requirements | IAW RoHS | | | Not IAW RoHS | |
|--------------------------------|------------------------|-------------------------|---------------------|--|--|
| | F2 Electrolytic Nickel | F6 Black Non Conductive | F7 Black Conductive | G3 Cadmium with Olive Drab Passivation | F8 Zinc Cobalt with Olive Drab Passivation |
| Thermal Shock | -40°C + 100°C | -55°C + 125°C | -55°C + 125°C | -55°C + 125°C | -40°C + 100°C |
| Salt Spray After Thermal Shock | 24 hour | 500 hour | 500 hour | 500 hour | 200 hour |
| Electical Conductivity | Very Good | NO | Very Good | Very Good | Good |
| Abrasion Resistance | Very Good | Very Good | Good | Very Good | Good |