


## MD1S THRU MD7S

CURRENT 0.5 Amperes  
VOLTAGE 50 to 1000 Volts

### Features

- Glass Passivated Die Construction
- Diffused Junction
- Low Forward Voltage Drop, High Current Capability
- Surge Overload Rating to 30A Peak
- Designed for Printed Circuit Board Applications
- Plastic Material - UL Flammability Classification 94V-0

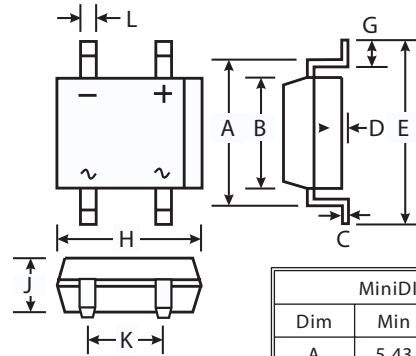

MiniDIP		
Dim	Min	Max
A	5.43	5.75
B	3.60	4.00
C	0.15	0.35
D	0.05	0.20
E	—	7.00
G	0.70	1.10
H	4.50	4.90
J	2.80	2.90
K	2.50	2.70
L	0.50	0.80
All Dimensions in mm		

### Mechanical Data

- Case : Molded Plastic
- Terminals : Solder Plated Leads,  
Solderable per MIL-STD-202, Method 2026
- Polarity : As Marked on Case
- Approx. Weight : 0.125 grams
- Mounting Position : Any
- Marking : Type Number

### Maximum Ratings And Electrical Characteristics

(Ratings at 25 °C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	MD1S	MD2S	MD3S	MD4S	MD5S	MD6S	MD7S	Units
Peak Repetitive Reverse voltage	$V_{RMM}$								
Working Peak Reverse voltage	$V_{RWM}$	50	100	200	400	600	800	1000	Volts
DC Blocking voltage	$V_R$								
RMS Reverse voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Average Rectified Output Current @ $T_A=40^\circ C$	$I_o$	0.5							Amp
Non-Repetitive Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30							Amps
Forward voltage (per element) @ $I_F=0.4 A$	$V_{FM}$	1.0							Volts
Peak Reverse Current at Rated DC Blocking voltage (per element)	@ $T_A=25^\circ C$	5.0							$\mu A$
	@ $T_A=100^\circ C$	500							
Typical Thermal Resistance, Junction to Ambient (Note 2)	$R_{\theta JA}$	75							$^\circ C/W$
Operating and Storage Temperature Range	$T_j$ $T_{STG}$	-55 to +150							$^\circ C$

#### Notes:

- (1) Mounted on P.C. Board.
- (2) Thermal resistance junction to ambient.

## RATING AND CHARACTERISTIC CURVES MD1S THRU MD7S

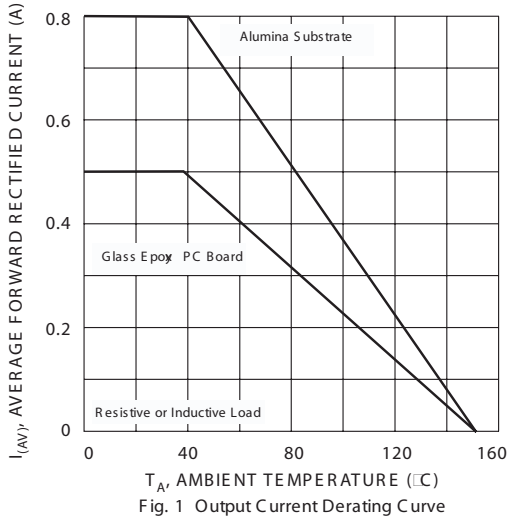


Fig. 1 Output Current Derating Curve

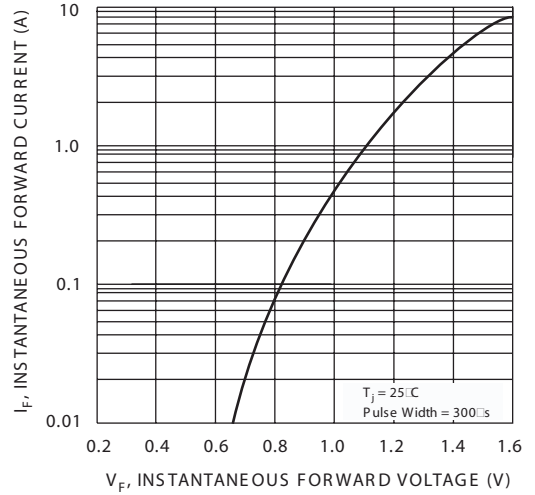


Fig. 2 Typical Forward Characteristics (per leg)

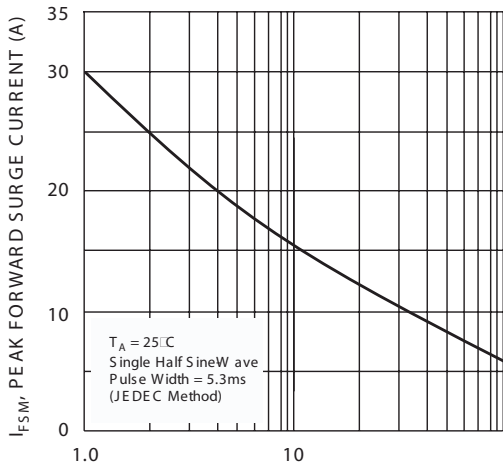


Fig. 3 Maximum Peak Forward Surge Current (per leg)

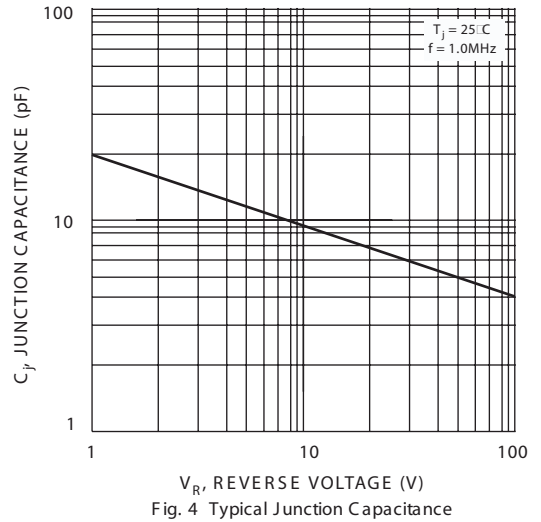


Fig. 4 Typical Junction Capacitance

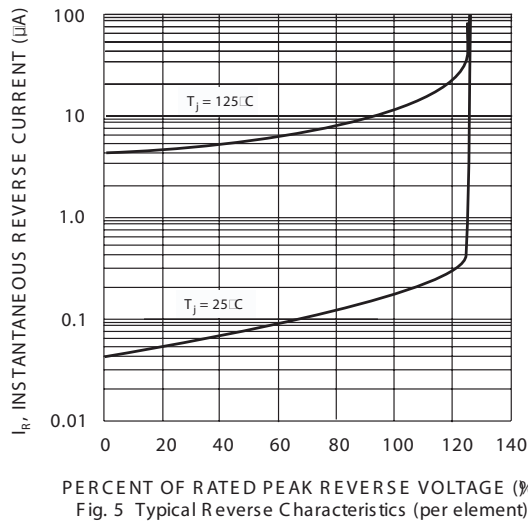


Fig. 5 Typical Reverse Characteristics (per element)