




MDS70

70 Watts, 50 Volts, Pulsed
Avionics 1030 - 1090MHz

GENERAL DESCRIPTION

The MDS70 is a COMMON BASE bipolar transistor. It is designed for MODE S pulsed systems in the frequency band 1030-1090 MHz. The device has gold thin-film metallization for proven highest MTTF. The transistor includes input prematch for broadband capacity. Low thermal resistance package reduces junction temperature, extends life.

CASE OUTLINE 55CX, STYLE 1

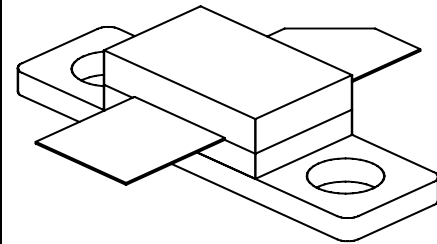

ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C ²	225 Watts
Maximum Voltage and Current	
BVces Collector to Base Voltage	65 Volts
BVebo Emitter to Base Voltage	3.5 Volts
Ic Collector Current	5.0 Amps
Maximum Temperatures	
Storage Temperature	- 65 to + 150°C
Operating Junction Temperature	+ 200°C

ELECTRICAL CHARACTERISTICS @ 25 °C



SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Out	F = 1030-1090 MHz Vcc = 50 Volts Pin = 6.5W Pulse Mod: Mode S ²	70		95	Watts
Pg	Power Gain		10.3		11.65	dB
RT	Rise Time				80	ns
ηc	Collector Efficiency			35		%
VSWR¹	Load Mismatch Tolerance		1090 MHz	5:1		

BVebo	Emitter to Base Breakdown	Ie = 5 mA	3.5			Volts
BVces	Collector to Emitter Breakdown	Ic = 25 mA	65			Volts
hFE	DC - Current Gain	Ic = 500 mA, Vce = 5 V	20			
θjc¹	Thermal Resistance				0.8	°C/W

Notes: 1) At rated pulse conditions
Rev B: October 2009


2) Mode S Burst: 0.5us (on/off), N=128, Per=6.4ms; LTDC=1%

Microsemi reserves the right to change, without notice, the specifications and information contained herein. Visit our web site at www.microsemi.com or contact our factory direct.

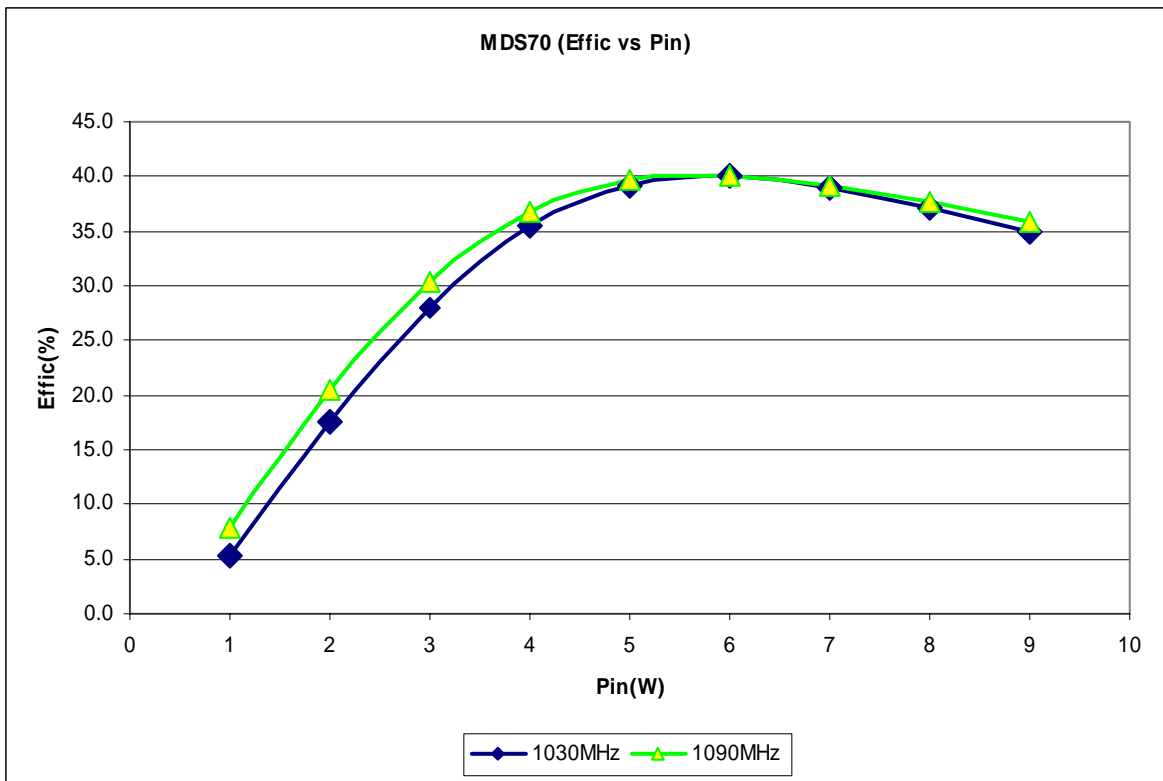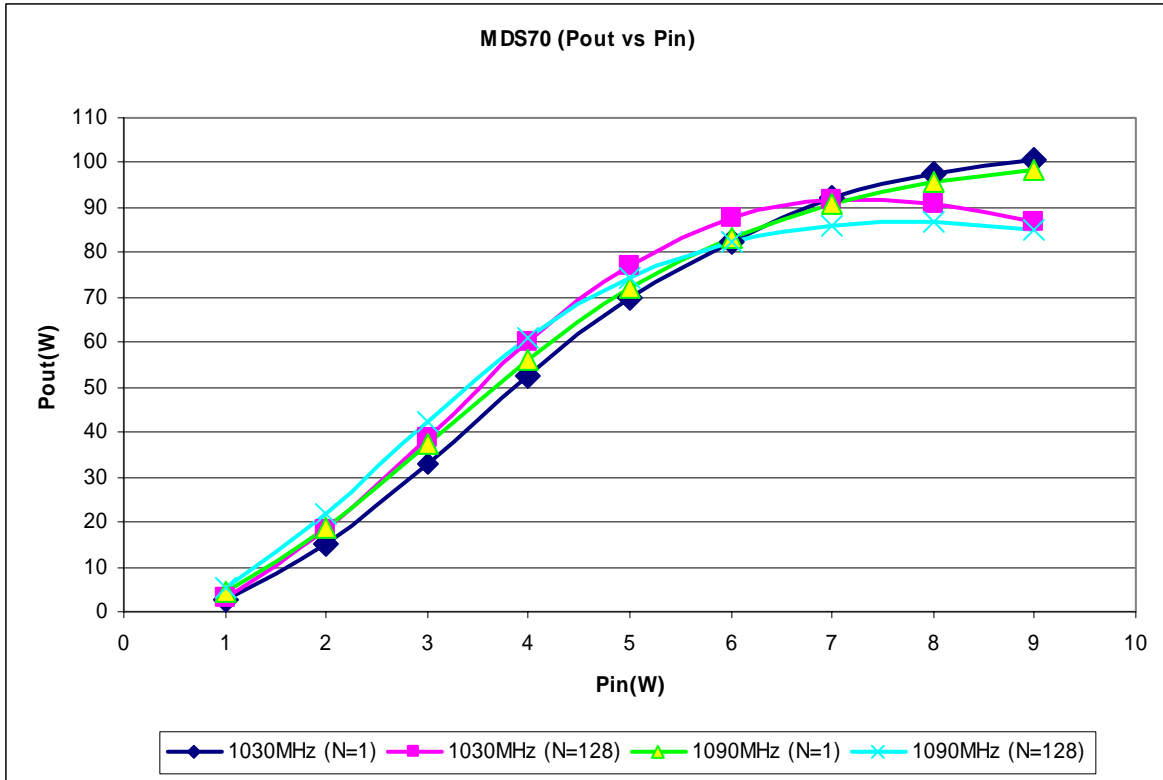

Microsemi reserves the right to change, without notice, the specifications and information contained herein. Visit our web site at www.microsemi.com or contact our factory direct.

COMPONENTS:
 C1=68uF electrolytic 60V
 C2=100uF chip cap (size B)
 C3=100uF chip cap(size A)
 R1=8kOhms; 1/4W
 L1=18 gauge wire, length=0.665" (0 turns)
 L2=18 gauge wire, length=1.73" (1 turn)

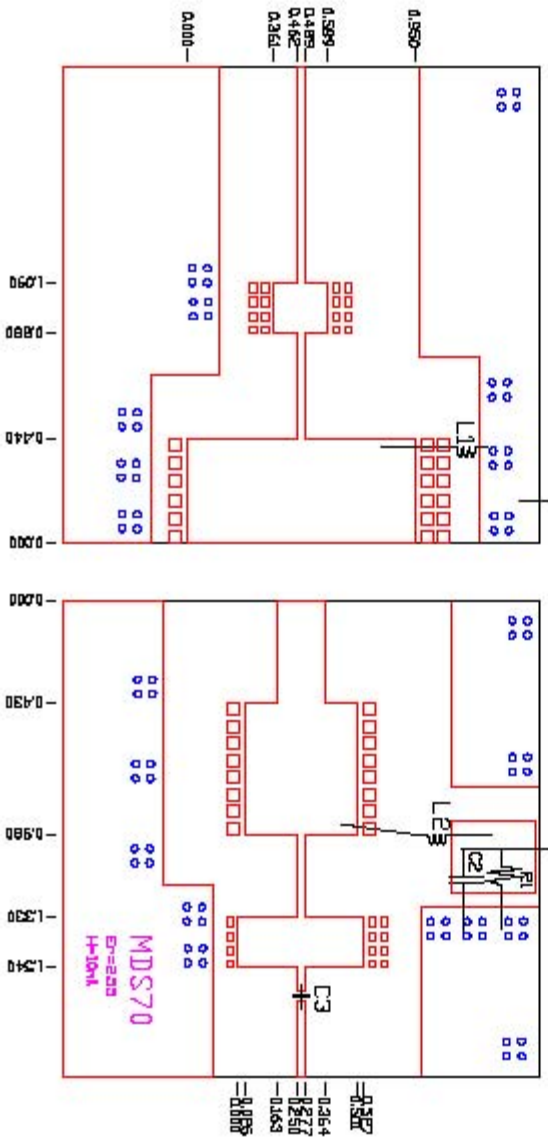

DIMENSIONS IN INCHES


Microsemi
 POWER PRODUCTS GROUP

MDS70 TEST CIRCUIT
 Date: Thu 2/16/06


E-2201 H-10M1
 SCALE: 1/1 REV: 1

MDS70 IMPEDANCE DATA:

FREQUENCY	Z_{source} (ohms)	Z_{load} (ohms)
1030	$3.0 - j4.8$	$5.3 - j1.2$
1090	$2.8 - j4.5$	$6.2 - j1.2$

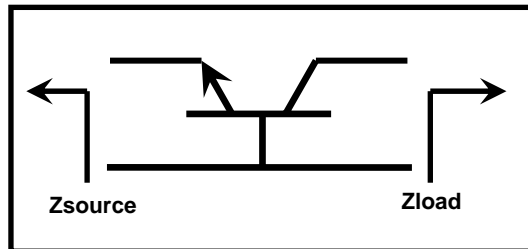

Microsemi reserves the right to change, without notice, the specifications and information contained herein. Visit our web site at www.microsemi.com or contact our factory direct.

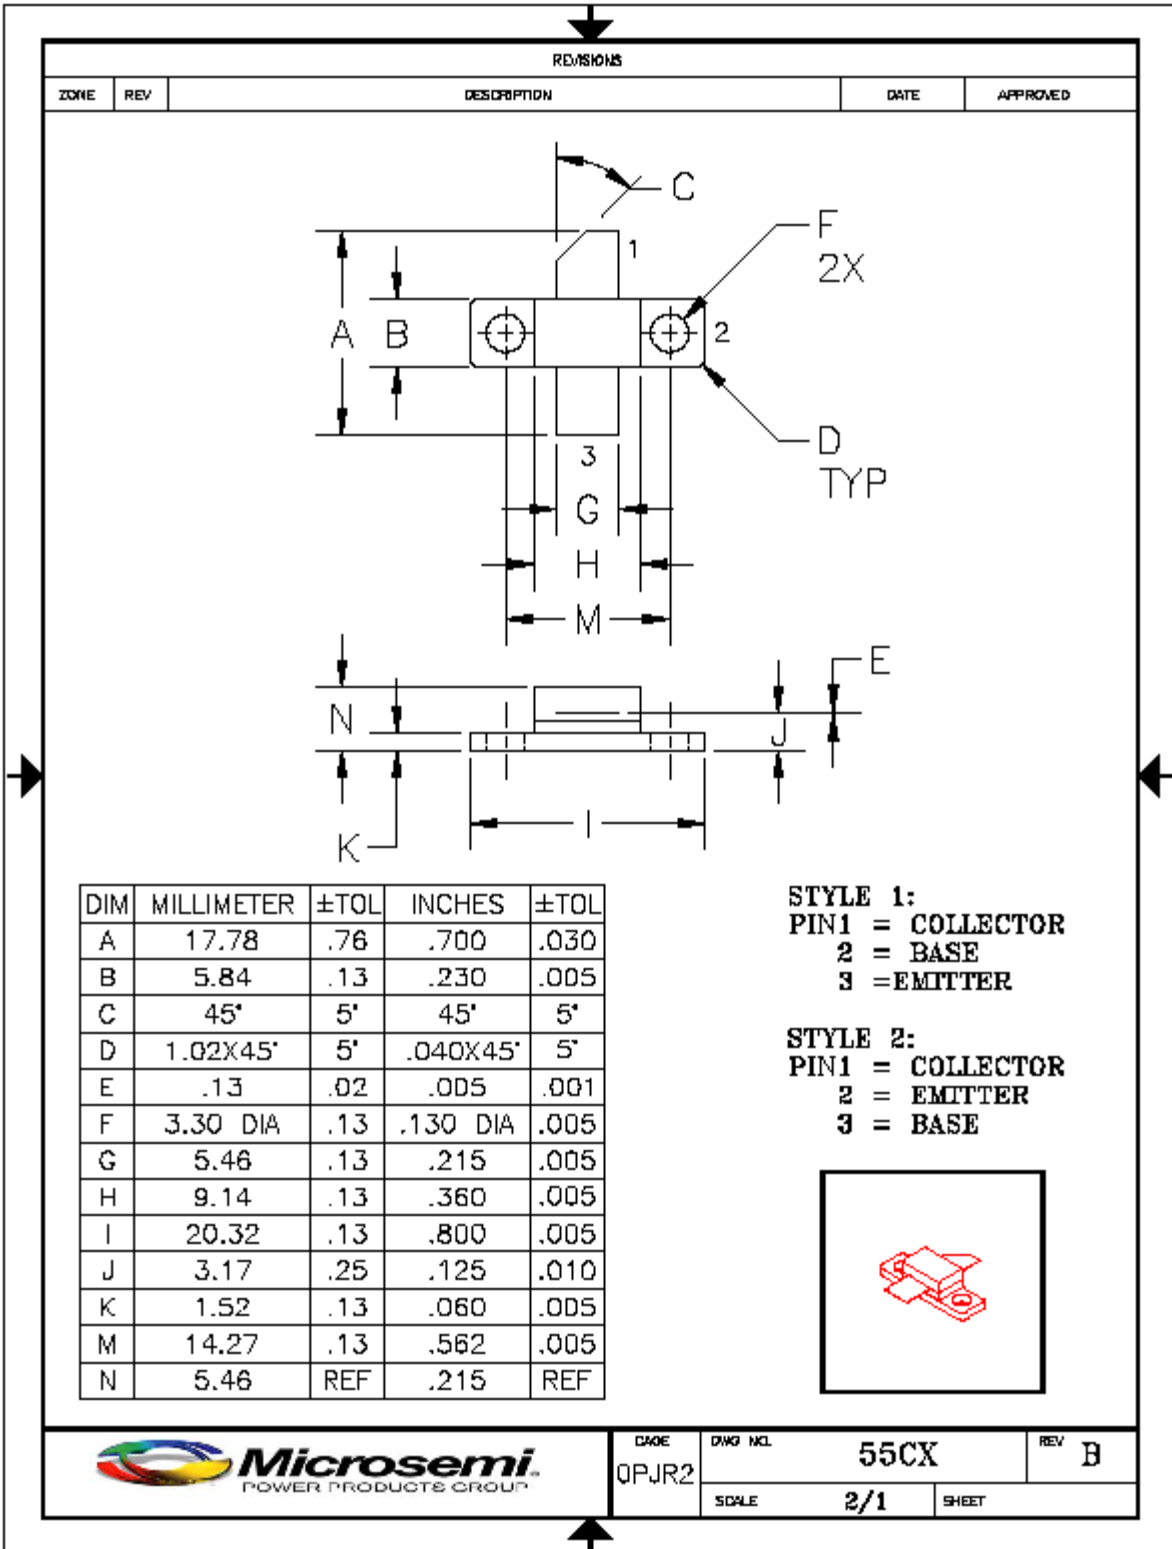

Microsemi reserves the right to change, without notice, the specifications and information contained herein. Visit our web site at www.microsemi.com or contact our factory direct.