

RF AMPLIFIER

MODEL QBH-8713

Available as: QBH-8713, Hybrid SM (E52-19422)

Features

- High Gain: 15.8 dB Typical
- High Power: +27 dBm Typical
- Operating Temp. - 40 °C to +70 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -40 °C to +70 °C
Frequency	890 - 915 MHz	890 - 915 MHz
Gain (dB)	15.8 Min.	—
Gain vs. Temperature	—	+1.5 Max.
Gain Flatness	0.3	0.6 Max.
Reverse Isolation (dB)	-21	-19 Min.
VSWR In	1.5:1	2.0:1 Max.
VSWR Out	1.6:1	2.0:1 Max.
1 dB Compression (dBm)	+27	+26 Min.
Output Intercept point 3rd Order	+42	+39 Min.
2nd Order	—	—
Noise Figure (dB)	1.0	1.5 Max.
Power Vdc	+15	+15
mA	150	170 Max.


Maximum Ratings

Ambient Operating Temperature -55 °C to +125 °C
 Storage Temperature -65 °C to + 150 °C
 Case Temperature + 125 °C
 DC Voltage + 20 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Note:

1. Specifications are guaranteed when tested in a 50 Ohm system.
 Specifications indicated as typical are not guaranteed.

Typical Performance Data

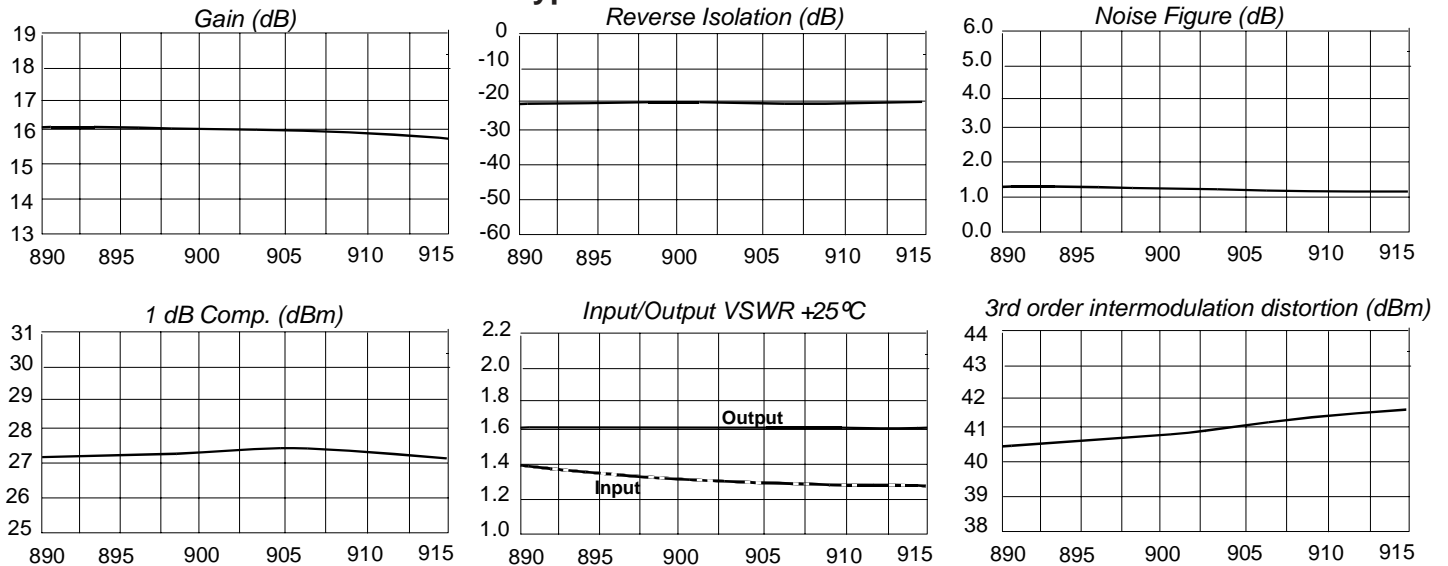

Legend ——— + 25 °C

Linear S-Parameters Data

FREQ. MHz	-- S11--		-- S21--		-- S12--		-- S22--	
	dB	Ang	dB	Ang	dB	Ang	dB	Ang
890	-15.8	54.6	15.9	-42.4	-20.7	-58.4	-12.8	-118.1
895	-16.4	41.7	15.9	-44.7	-20.6	-60.8	-12.8	-122.5
900	-17.0	26.9	15.9	-47.0	-20.6	-62.3	-12.8	-127.1
905	-17.5	10.1	15.8	-49.2	-20.5	-64.3	-12.8	-131.7
910	-17.8	-7.0	15.8	-51.5	-20.5	-66.5	-12.8	-136.1
915	-17.9	-21.7	15.7	-53.7	-20.4	-68.2	-12.8	-140.6



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 03/11/05

www.SpectrumMicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001