



1. CONFIGURATION & DIMENSIONS :

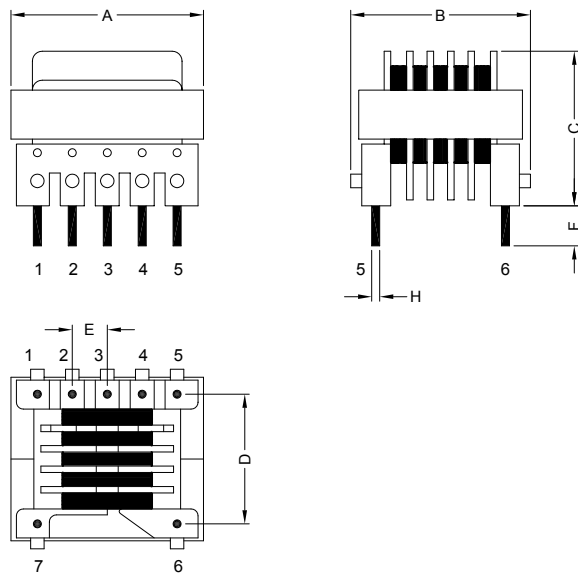

Unit:m/m

A	B	C	D	E	F	H
20.50 Max.	19.00 Max.	16.50 Max.	13.00±0.30	3.50±0.30	4.00±0.50	Ø0.80 Ref.

2. SCHEMATIC :

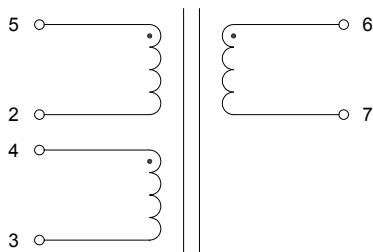

3. SCHEMATIC :

- a) Bobbin : PET
- b) Core : EE19
- c) Wire : Polyurethane DD (1UEW)
- d) Tape : Polyester Film
- e) Varnish : Synthite AC-43
- f) Teflon Tube : Cat No. : TEF TW-300
- g) Nomex : 2mil



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

5. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (L)	Conditions	Test Frequency	DCR @ 25°C
SEEB9HTF-50681	L : (6-7) = 300mH±10%	-	1KHz 0.1V	(6-7) = 230Ω Max.
	L : (4-3) = 4uH±10%	-	1KHz 0.1V	(4-3) = 105mΩ Max.
	L : (5-2) = 400uH±10%	-	1KHz 0.1V	(5-2) = 0.85Ω Max.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD