

The **SM2025-38LS** is a 2.0 to 2.5 GHz solid state GaAs FET amplifier designed for demanding applications such as digital video transmission. The amplifier provides 51 dB of linear gain with a typical P1dB of +39 dBm. Our proprietary pre-distortion technique provides enough linearity for approx. 2 Watts of COFDM output at >40dBc ACP. It is available in modular form (standard), as a lab unit or in 19" rack mountable form.



Features

- Integrated Linearizer
- Single Power Supply
- Thermal Protection with Auto Reset

Options

- Forward Power Detection
- Logic On/Off Control
- Integral Heatsink

Configurations


- Module (Standard)
- Laboratory Unit
- 19" Rack Mount

1 Input signal is 7.68 MHz wide with a 9.49 dB peak to average. The test measurement is in a 10 MHz bandwidth, offset by 10 MHz, with an ACP of 40 dBc.

2 -30 ° C is TBD

Parameter	Specification
Frequency Range	2.0 – 2.5 GHz
Pout (P1dB)	+39 dBm (typ.)
Pout (Linear)	+33 dBm ¹
Output Third Order Intercept Point (OIP3)	+58 dBm
Linear Gain	51 dB
Gain Flatness (over full band)	± .5 dB
Gain Change (over temperature)	± .5 dB
VSWR (Input/Output)	1.8:1 / 1.5:1
DC Input Voltage	+12 Volts
DC Input Current	3.0 Amperes (operational)
Mechanical Dimensions	6.0 x 2.5 x .56 inches
RF Connectors	SMA Female
Operating Temp. at Baseplate	-10° to +60°C ²
Operating Humidity	95% Non-condensing
Operating Altitude	Up to 10,000 feet above Sea Level

DIMENSIONS IN INCHES

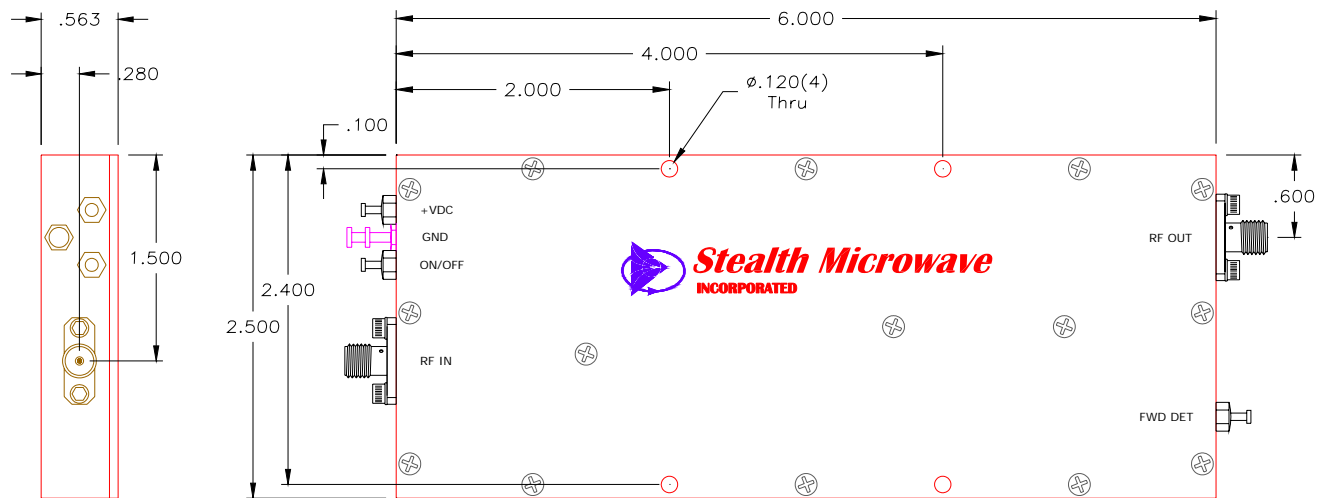

Pin	Description	Values
RF INPUT	Input Connector (SMA Female)	- 8 dBm (max.)
RF OUTPUT	Output Connector (SMA Female)	+ 39 dBm @ P1dB (typ.)
GND	Ground Turret	---
FWD DET	Forward Power Detector	+ 33dBm COFDM Output Power \approx + 2.0 Volts. Flatness across the band is \pm .4 dB looking into a 50 Ω load, example – Weinschel WA49-10-43, 10 dB attenuator, followed by an HP Power Sensor, #8481B.
+VDC	DC Input Voltage	+ 12 Volts @ 3.0 Amperes. (operational)
ON/OFF	TTL Logic On/Off	0 Volts = Off, + 5 Volts = On

Specifications subject to change without notice.